

# REMOVABLE CONCRETE ANCHOR - 2 PART LOCK SWIVEL D-RING & STUD

## Features

- Suitable for vertical, horizontal and Overhead applications.
- Simply insert Swivel D-Ring Pin and lock into the threaded Stud
- For use as an anchorage point for fall protection equipment
- The Swivel Eye pin can be removed and reused in another threaded Stud. When a Stud is not in use, a cap covers the recess.
- Install into Concrete with a minimum thickness of 150mm, drill hole size is 20mm x 110mm.
- Used with adhesive capsule HVU M20x 170 code 256695
- Not suitable for Abseiling
- Can be sold individually refer part numbers AFA930310A & AFA930310S.

## How To Use

Refer to User Instruction Manual



## Metal Components

Anchorage Eye	: Alloy Steel
Threaded Stud	: 316 Stainless Steel

## Static Strength




15kN in all three directions

## Weight

349gm ± 10 gm

## Relevant Standards

Conforms to EN 795:2012 Type A & AS/NZS 5532:2013

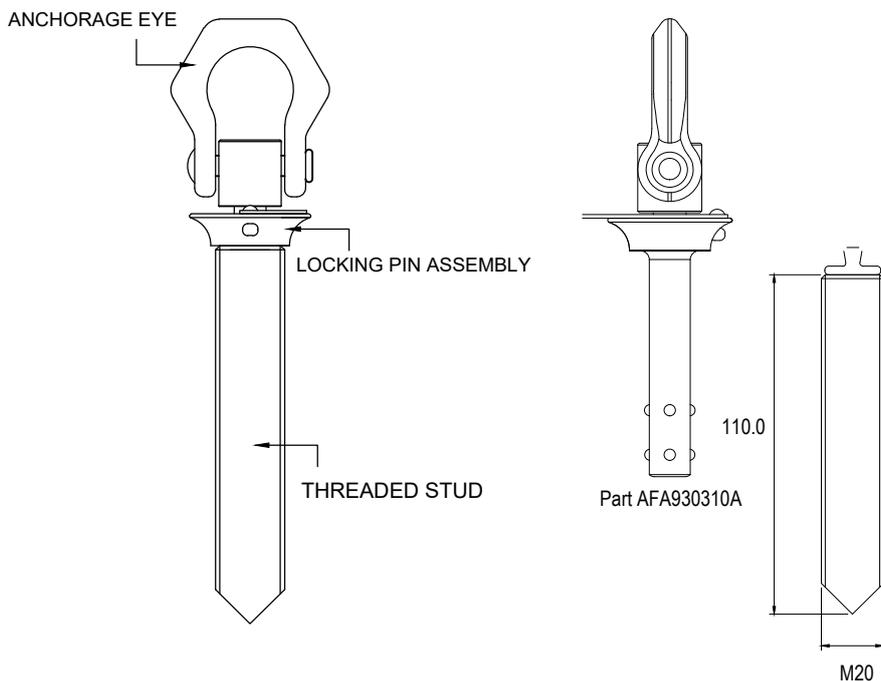

Part AFA935310S