Features

- The Beam anchor can be installed on Vertical beams and other structural steel to create an anchor point for a fall arrest device.
- The adjustable clamping jaws can be adjusted to fit a range of beam flanges from 90mm to 340mm.
- Supplied with a 360 Deg D-ring for the attachment point.
- It can be easily fitted and removed using the adjustment nut and locking pin.
- Suitable for both vertical and horizontal applications.
- Light Weight
- Suitable for one person

How To Use

Refer to User Instruction Manual



Metal Components

Material : Aluminum Alloy & Alloy Steel Anodised

Finish : Anodized & ED Coated.

Weight

 $2.848 \text{ kgs} (6.278 \text{ lbs}) \pm 0.020 \text{ kgs} (0.044 \text{ lbs}).$


System Strength

23kN MBS (5000lbs)


Relevant Standards

Tested as per EN 795:2012 Type B, AS/NZS 5532:2013 & ANSI Z359.18-2017 Type A



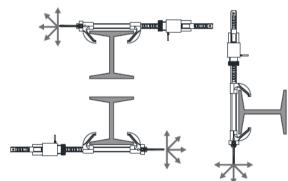

Direction of Load

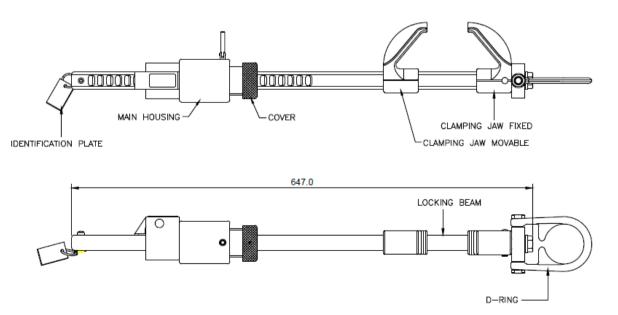

C € 0598