AFA935156

Features

- Designed as Extremity Posts for a Horizontal lifeline on a Standing Seam Roof with a seam distance of 320mm - 650mm.
- Built in energy absorbing Anchor which reduces the impact on users and roof profiles in the event of a fall.
- Anchorage eye provides universal connection & can be used as an anchorage point.
- · Rated for 4 users when used in a Lifeline System.



How to Use

Refer to User Instruction Manual





Metal Components

Cross Arm : 6061 T6 Aluminum: Anodized Anchor Point : 316 Stainless Steel, Polished Standing Seam Clamp : 6005 T5 Aluminum: Anodized Bolt & Grub Screws : M10 SS316 Grade A4-70


MBS : 15kN

Weight

2.95 kg <u>+</u> 0.05 kg

Relevant Standards

Conforms to EN 795:2012 Type A & TS16415:2013 Type A AS/NZS 5532:2013

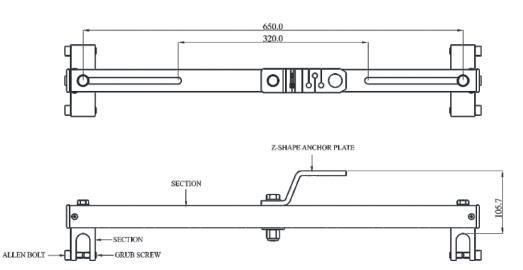

C € 0598

KStrong.com