VARIABLE CORNER BEND TO SUIT THE IMPAXX POSTS

AFA935207(CB)

Features

- The Variable Corner Bend Post is designed to be attached to a range of posts which provides an angle change in the system, internal or external between 0 to 45 degrees, by manually adjusting.
- Minimum allowable radius on intermediate pipe is 188.0mm which will start from minimum distance of 50mm from center.
- Comes with M10 fasteners which can be fitted on different type of roof posts
- To form the tube to the correct angle, refer to UIM.
- Suitable with 8.0mm wire rope lifelines.



How to Use

Refer to User Instruction Manual



Metal Components

Corner Variable Bend : 316 Stainless Steel, Polished

M10 Bolt & Washers : SS316 Grade A4-70

Minimum Breaking Strength : 15kN


Weight

316 Stainless Steel

403.0 gms. ± 10 gms.

Relevant Standards

Conforms to EN 795:2012 Type A & TS16415:2013 Type A when used in a system

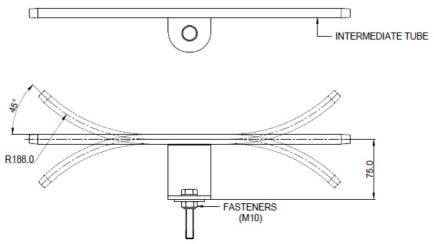

(€ 0598