ANCHOR POST TO MOUNT SRL'S FOR TRAPEZOIDAL ROOF PROFILES

AFA935408

Features

- Compatible with all KStrong range of retractable fall arrester Blocks, allowing 360° rotation.
- Designed to be fixed on the trapezoidal roof with a minimum thickness of 0.40mm.
- The base plate has series of holes to fit on Trapezoidal Roofs (minimum thickness of 0.40mm) of different pitch/rib from 217.0mm to 465.0mm.
- Compact & lightweight.
- Easy and quick to install using the supplied Rivets.



How to Use

Refer to User Instruction Manual



Metal Components

Mounting Bracket Base : High Strength Alloy Steel: ED Coated Black
Plate : High Strength Alloy Steel: ED Coated Black & Grey


Minimum Breaking Strength : 23kN

Weight

14.28 kg + 0.050 kg

Relevant Standards

Conforms to EN 795:2012 Type A & AS/NZS 5532:2013

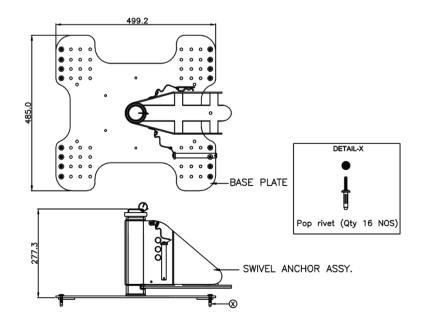

C € 0598

KStrong.com