Features

- Ladder extension arm is a basic and effective tool used to provide additional support for assisting workers while transitioning from a ladder to a raised working surface.
- The unique design of the brackets can easily be attached to both round and square ladder rungs.
- Supplied with a fall arrest rated anchor point at the top of the post.
- Suitable for ladder rung spacing between 250mm 350mm
- Suit ladder rung Diameter: Ø16.0mm to Ø52.0mm.
- Can be used with AFF6000 & AFF7000 Systems

How To Use

Refer to User Instruction Manual





SCAN TO DOWNLOA

Metal Components

Extension Arm : 316 Stainless Steel, Polished

Mounting Brackets & Bolts : 316 Stainless Steel, Polished

Anchor Point : 316 Stainless Steel Polished, 15kN


Minimum Breaking Strength : 15kN

Weight

10.20 kg + 0.20 kg

Relevant Standards

Conforms to EN 795:2012 Type A & TS16415: 2013 Type A.

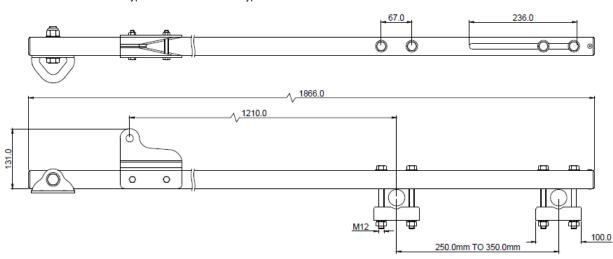

COMPATIBLE SUPPORT SECTION	•	П	Г	T	エ
PROCESS					