

AFT751031

MODULAR DAVIT WITH WALL MOUNTING BASE

KStrong Extreme Davit systems have been designed for confined space entry / retrieval applications. Its modular interchangeable design allows the system to be mounted on multiple bases for all applications.

FEATURES

- The Extreme Wall Mounted Davit breaks down into two components for easy storage, transport and setup. No tools are required for assembly. (MAST AFT756201 & Boom AFT756001)
- Wall Mount Bases are designed to be mounted to concrete or steel structure.
- Base Installation must be approved to local regulations by a qualified engineer.

How To Use

Refer to User Instruction Manual








Height Adjustment And Reach


	Product Code	Upper	Middle	Lower
	Distance from column	0.675 m	0.845 m	0.920 m
	Height of arm	1.900 m	1.620 m	1.280 m

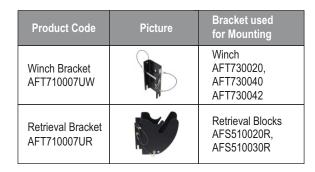









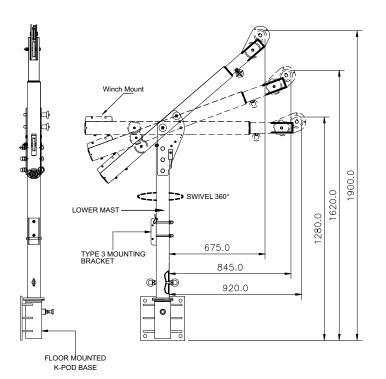

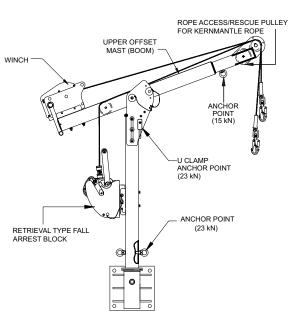

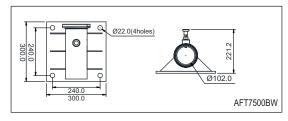



TECHNICAL SNAPSHOT

Material	High Strength and Durable Aluminium Alloy
Maximum Load Capacity	500 kg (for Confined Space Rescue) 250 kg (for Material Lifting as per Machine Directive)
Finish	Powder Coated
System Strength	15kN
Certification	EN 795:2012 Type A & AS/NZS 5532:2013
Weight	Mast & Boom: 44.44kgs ± 0.10kgs Floor mount Base: 9.97kg ± 0.10kgs





AFT756201

DAVIT MAST

Features

- Lower mast assembly is designed to be fixed on different davit system with H-Base davit, Wall/floor mounted, Hitch mounting davit/Concrete flush mounted davit.
- Comes with pre installed mounting bracket which is Compatible with Retrieval blocks by using universal mounting bracket.
- Upper offset mast (BOOM) support plate is designed to attach the Upper offset mast with the help of locking pins & can be adjusted at 3 defined positions.
- Additional eye nut is provide to use as an anchorage point in case of rescue.
- Cap is provided on top of assembly to prevent from ingress of water and dust particle.

Components

Lower mast : Aluminium alloy, Powder Coated Black


Eye nut : Stainless steel, electropolished / E Coated

Mounting bracket : Alloy steel, ED coated black

Weight

18.089 kgs ± 0.20 kgs



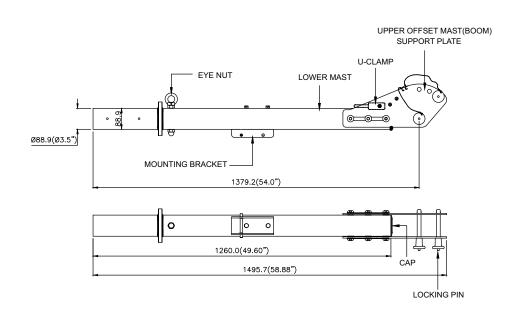







DAVIT BOOM CANTILEVER ARM ASSEMBLY

Features

- Offset mast (BOOM) is designed to be fixed upon Lower mast assembly to make complete Davit system for confined space entry.
- Upper Offset Mast can be used with Lower mast of all models of davit system (i.e. H-Base mounting, Wall/floor mounted, Hitch mounting davit/Concrete flush mounted davits).
- Comes with pre-installed mounting bracket which is compatible to mount STRONG winches-AFT730020, AFT730040, AFT730042, AFT730042SS, AFT730120, AFT730135
- Comes with pulleys, which are used for smooth movement of rope / wire used for lowering / lifting or rescue.
- Additional eye nut is provide to use as an anchorage point in case of rescue.

Components

Mast arm & Big pulley : Aluminium alloy, ED coated grey

Small pulley & Eye nut : Stainless steel, electropolished / E Coated


Mounting bracket : Alloy steel, ED coated black

System Strength

15kN

Weight

12.47 kgs ± 0.20 kgs

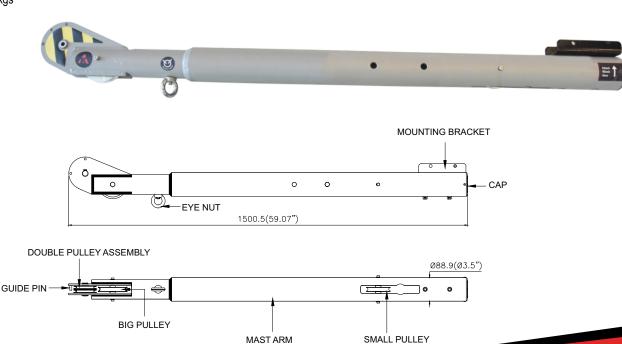





AFT7500BW

WALL MOUNTING SS BASE TO SUIT DAVITS

Features

- Wall mounting base to easily mount KStrong confined system such as Tripod, Davits on various floor such as concrete, metal structure or vehicle with help of suitable fasteners to access various confined spaces.
- A Polymer sleeve inside to prevent metal to metal contact and longer service life.

Components

Housing : Stainless steel, electropolished / E Coated

Sleeve : PTFE

Capacity

300 KG

Weight

 $9.97 \text{ kgs} \pm 0.10 \text{kgs}$

