BRUTE LOAD ARRESTOR

AFZ18100010

The Brute Load Arrestors are designed as secondary safety back-up for overhead loads, used in conjunction with a primary lifting device or support, such as a hoist or permanently suspended load.

If the primary support fails, the load arrestor will automatically stop the load from falling, thereby preventing damage to the load and, more importantly, protecting users below.

Features

- Portable and easy to install, supplied with overhead 19mm D-shackle
- 6 nos. of holes on each flange plate to enable Load Arrestor to be fixed directly to the structure (ceiling/ground).
- Comes with a unique load indicator that Load arrestor has arrested a fall.
- Shock Absorbing Systems
- Fast acting braking system.
- Self-Retracting Steel Cable
- Suitable to be used for Basket Ball Hoops, Stage lighting, Car assembly, Lifts & Industrial machinery.



1000 kgs

Material

Casing : High Strength Alloy Steel
Wire : 8.0mm x 316 Stainless Steel

D-shackle : 19 mm Steel
Minimum Breaking Strength : Greater than 50 kN

Weight

AFZ1000010 : $31.12 \text{ kgs.} \pm 0.10 \text{ kgs.}$


How To Use

Refer to User Instruction Manual



Relevant Standards

Machine Directive 2006/42/CE

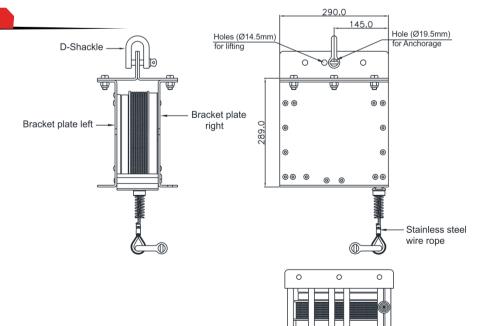

0

0

0

