

KSTRONG[®]
UNRIVALED SAFETY.

ASIA PACIFIC



**Disclaimer**

The information provided in this catalog is based on the technical data that KStrong obtained under laboratory conditions it believes to be reliable. KStrong does not guarantee results and takes no liability or obligation in connection with this information. Since conditions of end-use are beyond our control, it is the user's responsibility to determine the hazard levels and the use of proper personal protective equipment. Persons having technical expertise should undertake evaluation under their specific end-use conditions, at their discretion and risk. Please ensure that this information is only to check that the product selected is suitable for the intended use. Any product that is damaged, torn, worn, or punctured should be discontinued from usage immediately.

CONTENTS


SECTION	PAGE
Operations	01
Mission Vision	02
Certification	03
Understanding Fall Protection	04-23
FALL PROTECTION SYSTEMS	24-141
Harnesses	24-51
Lanyards	52-67
Retractable Fall Arrester Blocks	68-87
Temporary Anchorage Line	88-103
Anchorage	104-119
Confined Space	120-129
Rope Access & Rescue	130-149
Connectors	150-159
Load Arrestor and Drop Prevention	160-168
INDEX	169-171



Operations and Testing

KStrong is backed by the largest vertically integrated manufacturing facility in the world, manufacturing all components of its entire product range from basic raw materials, all done in-house. Operations are performed using the best practices such as Six Sigma, Gemba (the real place), KAIZEN (Continuous Improvement), Poka-Yoke (Error Proofing) etc. Along with the sustainability of these practices, the operations are under constant vigilance and are continually improvised each day, involving better processes and technology at every step.

The manufacturing facilities, using best in-class state of the art machinery along with extremely skilled manpower involved in critical operations, produce the highest quality safety equipment from head to toe.

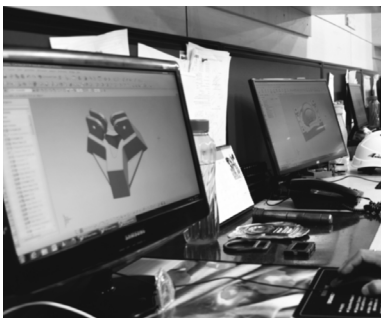

Product Design and Development



Webbing Cutting Machine




Dynamic Performance Testing




Dynamic Performance Testing



Block Servicing

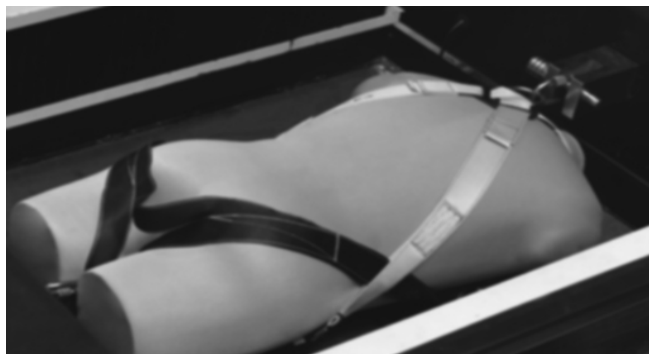

Harness Static Load Testing

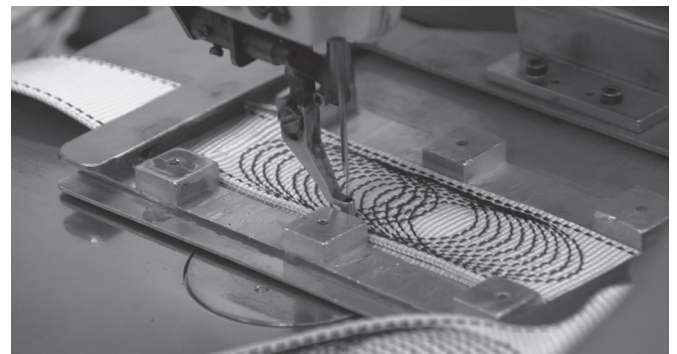

Sewing

MISSION VISION

KStrong Unrivaled Safety

The founders of KStrong have been successfully manufacturing personal protective equipment globally for over 20 years. With the support of a large team of highly experienced research and product development specialists along with global manufacturing facilities, KStrong is poised to become the preeminent brand of choice for personal protective safety products. KStrong takes pride in taking careful measures to ensure all products meet applicable respective government codes and professional standards, such as EN, AS/NZS and ANSI. We look forward to helping your company protect its most valued possession, its workers!

Mission

To protect and improve the lives of workers by offering the most comprehensive line of safety equipment through a national distribution base that provides Unrivaled levels of service and value.

Vision

To become the premier global provider of personal protective safety equipment.

Certification

Quality Management Systems Certification (ISO:9001:2015)

KStrong Quality Management System is Certified as per ISO : 9001 : 2015, by SGS-UK.

Under this certification all processes and systems are stringently monitored to deliver quality product at each stage of manufacturing and service.



What is Fall Protection?


Fall protection is the use of controls designed to protect personnel from falling or in the event they do fall, to stop them without causing severe injury. Typically, fall protection is implemented when working at height, but may be relevant when working near any edge, such as near a pit or hole, or performing work on a steep surface. The fall protection system is designed to restrain or arrest the fall from heights.

Fall Protection can either be Active or Passive

Active Fall Protection Systems

Fall protection includes systems like body belts, harnesses, lanyards, and their connecting attachments such as SRLs, rope lines, lifelines etc that require some effort by the users to make the protection effective.

The use of either of the above-mentioned systems is only decided when a Risk Assessment has been completed prior to work commencing.

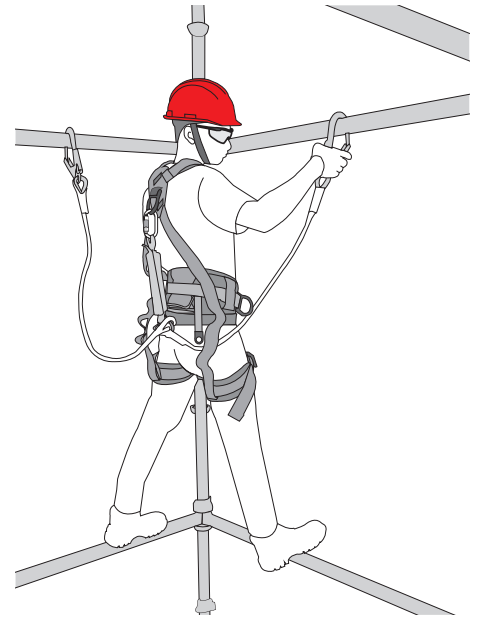

Anchor/ Anchorage Points



The critical problem in all active fall protection - the anchorage point - is the position on an independent structure to which the fall protection device or lanyard is securely attached. Supervisor and users must also access and manage the hazards below and to the side of the anchoring point to ensure that the user does not strike or swing into any obstacles should he or she fall.

Full Body Harness



The full body harness is a key part of an active fall arrest system. The harness distributes the impact forces safely across the users body in the event of a fall whilst ensuring that the user who has fallen, remains suspended in an upright position after the fall has occurred.

Lanyards



A Lanyard is the connecting element in a fall protection system between a Harness and an Anchorage Point. They can be used in Fall Arrest or Restraint depending on the application and the products selected for the task. It allows limited lateral movement on the job. Its length and placement of the anchor determines the amount of free fall a User experiences before the protective device stops the fall.

Retracting Lifeline Devices



These portable, self-contained devices are fixed to an anchorage point above the work area. They act as an automatic taut lanyard. The lifeline rope or cable is attached directly to the worker's body belt or harness. The rope extends out of the device as the distance increases and retracts as the user moves closer. The moment a fall occurs, the locking mechanism is activated to arrest the fall whilst the inbuilt shock absorber reduces the potential shock load. This device is ideal for use on sloping roofs and angular structures, because the rope is never slack and does not interfere with the surface work.

Lifeline



When the user is in constant movement on an elevated horizontal plane, a horizontal lifeline provides continuous anchorage. It is an anchoring cable rigged between two fixed anchorage points on the same level. The line may serve as a mobile fixture to attach Lanyards, Lifelines or Fall Arrest Blocks. The purpose is to limit swing injuries by providing continuous overhead support fixture point as the worker moves horizontally. Temporary Vertical Anchorage Line Systems have uniquely designed Rope Grabs that grab onto the Anchorage Line on which they move, thus arresting the fall immediately.

Fall Arresting Systems (FAS)

The purpose of a Fall Arresting System (FAS) is not only to stop the fall but also to ensure that the energy gained by the body during the fall is distributed so as to prevent the wearer from being injured. A Fall Arresting System is composed of an independent anchorage point, a vertical lifeline (dropline), a fall arrester, a harness (or a belt) and optionally a lanyard and a shock absorber, equipped with all the necessary hardware (snap-hooks, D-rings, etc).

Hardware Connectors



Hardware Connectors consist of Hooks, Karabiners, Anchorage extensions and metal links that connect parts of the Fall Arrest System.

Rescue Systems



The moments following an accidental fall can be critical in preventing worker injuries. Companies should develop, implement, and regularly practice rescue procedures and use specialized rescue equipment which should be available 100% of the working time.

Systems Used In Below-ground Level Tanks or Confined Spaces



Confined spaces are those, which by design have limited openings for entry and exit. Examples of confined spaces includes storage tanks, process vessels, ship compartments, pits, silos, vats, sewers, boilers, tunnels, vaults and pipelines. For entering and safely exiting the confined space, equipment such as Davits, Tripod and Winches are available.

Passive Fall Protection Systems

Fall protection such as nets, guard rails and Scaffolding generally provide 100% protection for multiple workers.

Fall Protection Roles

User / Contractor

Users / Contractors who are required to perform work at heights shall have a working knowledge of the hazards present in their work area as well as how to use, inspect and care for the personal fall protection systems they are required to use.

Competent Person

Competent Person means a person who has been “trained” and is capable of identifying hazardous or dangerous conditions in the personal fall arrest system or any component thereof, as well as in their application and use with related equipment. Competent Persons may be working at heights instructors, managers, supervisors, 3rd party suppliers or employees.

Employer

Any manager, supervisor, or owner of a company that has employees who are required to perform work at heights.

Fall Protection Responsibilities

User / Contractor

- Work within the boundaries of guardrails and other equipment used as protective barriers.
- Effectively use and care for fall protection equipment in accordance with manufacturer’s requirements.
- Completed Working at Height training.
- Have a working at heights assessment and Rescue Plan for all work where the risk of a fall is present.

Competent Person

- Ensure that employees performing work at heights meet current training requirements and that employees have the skills necessary for safe performance.
- Develop working at height and rescue plans as needed for employees.
- Recommend suitable fall arrest systems for various work at height situations.
- Perform periodic inspections of fall protection equipment and systems in accordance with manufacturer’s or legislative requirements.
- Stop any work that is being performed in an unsafe manner.

Employer

- Provide Safe working environment through collective protection.
- First, the employer must set a policy, which is clearly communicated to employees and enforced during applicable operations, that addresses these points:
 - Worker Qualification: Is the employee qualified to perform work at height / elevated conditions?
 - Are the workers who are placed in the elevated work positions trained in the Fall protection system to be used?
 - Appoint a competent person to ensure safe work at height.

Selection of Equipment

Is equipment being used as required to perform the job safely?
Is the equipment purchased for the job certified to the appropriate standards?

Installation of Equipment

Has equipment been installed according to acceptable standards, regulations, and manufacturer's recommendations?

Equipment Maintenance and Inspection

Can the equipment be maintained as recommended, and will employees inspect their personal system components daily before use.

Rescue Procedures

Has the plan been developed to rescue any employee who has experienced a fall and either awaits rescue while suspended in the Harness or is seriously injured because of not using safety equipment?

Job Safety Analysis (JSA)

Has a job procedure been developed and implemented for working in an elevated situation or near any edge, such as a pit or hole?

The analysis of elevated work tasks is intended to determine the most suitable match between required worker mobility and the capabilities of the fall protection system.

The company policy establishes what is to be done.

An appropriate system and its components must be selected. A variety of equipment is available to help employers set up an effective fall protection program. Generally, it includes Body Support mechanisms, Climbing protection systems, Vertical Lifeline Systems, Horizontal Lifeline Systems, Confined Entry and Retrieval Systems, and Controlled Descent Emergency Escape Systems.

However, the proper selection and purchase of safety equipment alone does not constitute a fall protection program.

The employer is responsible for selecting the most suitable Fall protection equipment for the application recommended. They can refer to the Manufacturers literature, instructions and information provided on the label. Equipment not recommended for use should never be used for application stated.

Provide Training


Ensure that employees performing work at heights meet current training requirements and have the skills necessary to perform the work competently.

Understand the scope and hazards associated with the work to be performed.


Ensure that the hierarchy of controls is applied when evaluating work at heights.

UNDERSTANDING FALL PROTECTION

Hierarchy of Control

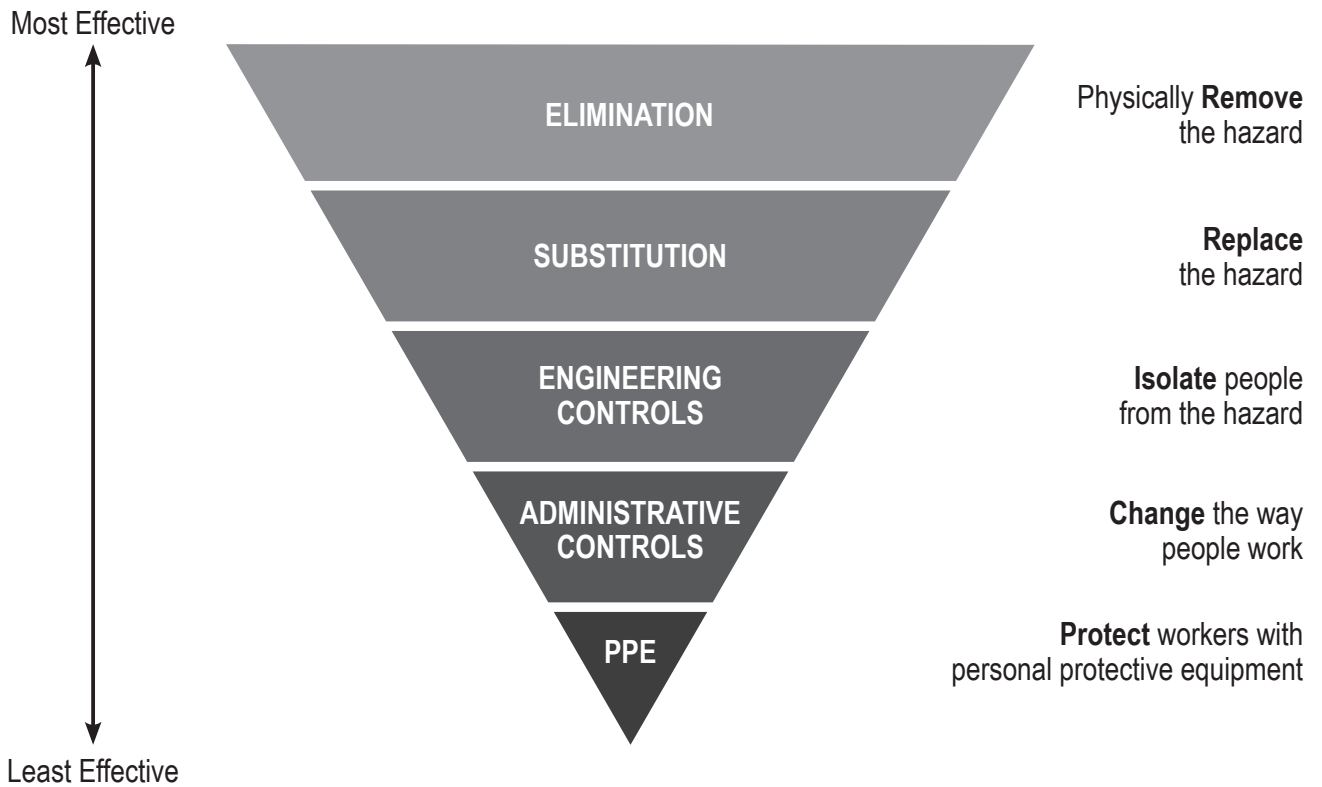

Hierarchy of Fall protection

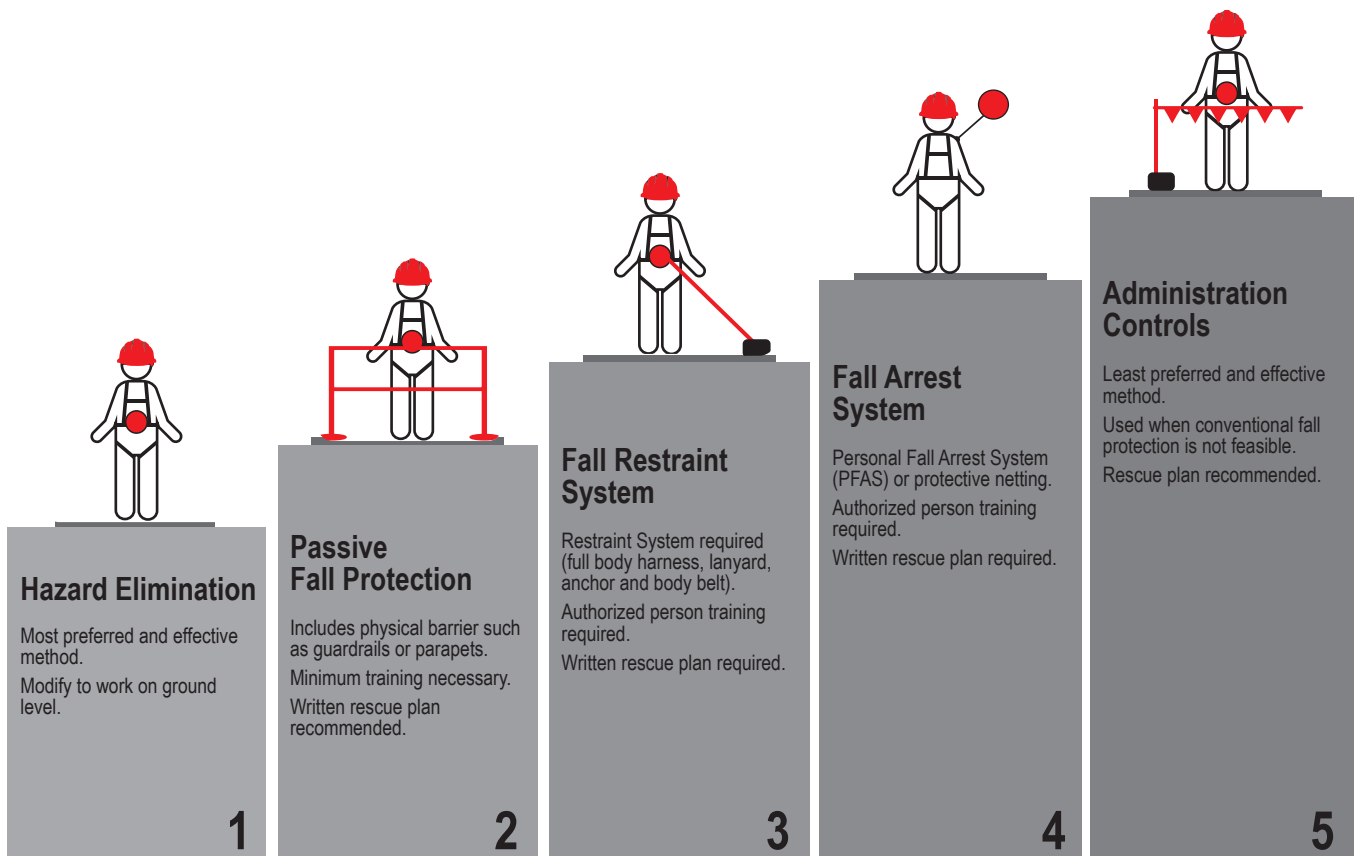

Calculating Fall Clearance

Shock Absorbing Lanyard

Fall clearance is the distance required to prevent workers from hitting the ground or lower level, in case of a fall.

Here is how to calculate fall clearance:

Required Distance = Lanyard Length + Deceleration Distance + Height where work is happening + Safety Factor

Correct calculation ensures that the operator's fall arrest system will activate so they are not injured by coming into contact with any obstructions below.

$$RD = FFD + DD + C$$


RD = Required Distance
Working surface to Nearest Obstruction

FFD = Free Fall Distance
2.0m Maximum allowed

DD = Energy Absorber Deceleration Distance
+ D-Ring Slide and Harness Stretch


C = Clearance to Obstruction During Fall Arrest
(1.0m minimum safety factor required)

FFD	Extension
600mm	300mm
1000mm	500mm
1500mm	600mm
2000mm	900mm

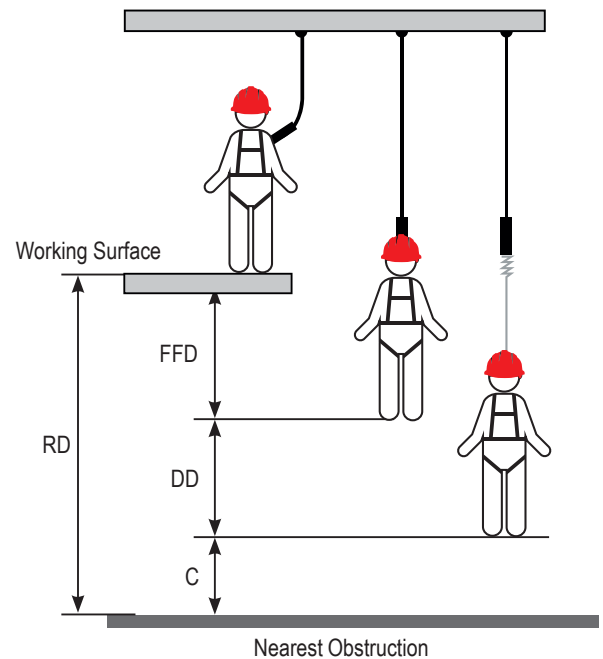


Self Retracting Lifeline

RD = Required Distance is 2.0m
Required distance below working surface to Nearest Obstruction

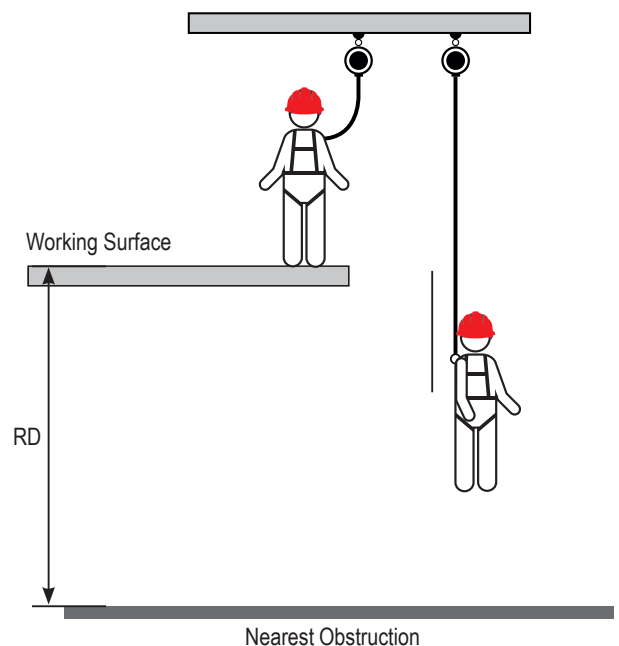

Understanding Fall Factors

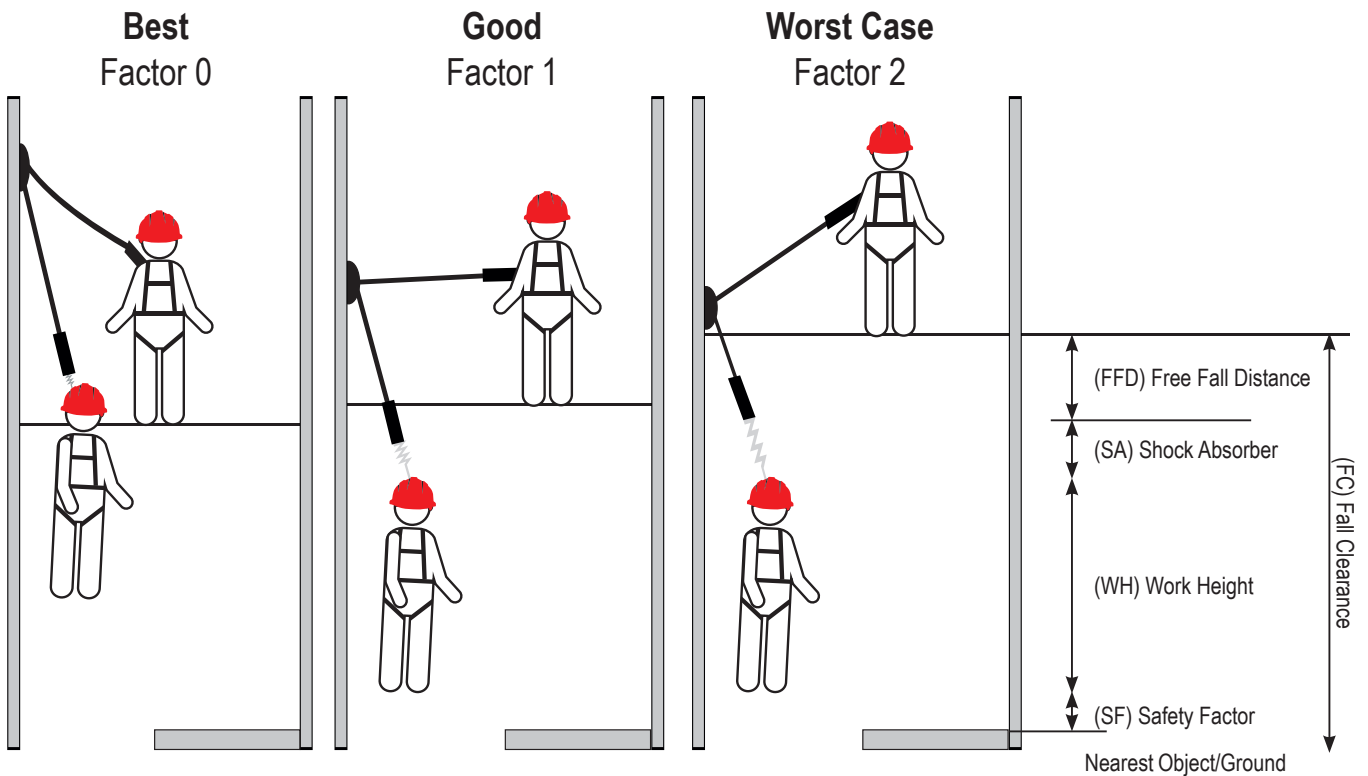

Fall Factor 0

Indicates that you have reduced as much free fall distance as possible by attaching your lanyard above you.

Fall Factor 1

Indicates your anchor point is at the same level as your attachment point on the harness. This means that you will potentially fall the full length of your lanyard (2m on a 2m lanyard).

Fall Factor 2

Is the worst case scenario, where you are anchored at your feet. This means you will fall up to twice the length of your lanyard. A total of 6.75m clearance would be required when using a 2m Lanyard.

Definitions of Fall Protection Systems

A system designed to control and protect users from falling or in the event they do fall, to stop them without causing severe injury is called a Fall Protection System. This system is an assembly of components intended to protect the user against falls from a height, constituted of:

- A body holding device – A full body harness, sitting harness, work positioning belt, rescue harness, rescue loop.
- An anchor device which can be connected to a reliable anchorage point.
- A connecting Element – A lanyard, fall arrestor, Self retracting Life line that connects the harness to the anchor.


Fall Arrest

A Fall Arrest System is one that is designed to stop the free fall of a user and limit the maximum arresting forces imposed on the user to 6kN or less. Free Fall is described as a fall or the arrest of a fall where the fall distance before the fall-arrest system begins to take any loading, in excess of 600mm either vertically or on a slope which is not possible to walk without the assistance of a handrail or hand line.

Requirements

- Full-body harness lanyard or fall-arrest device which will limit free fall to 2.0m max.
- 12kN ultimate strength anchorage or equivalent horizontal lifeline or rail.

Typical Application

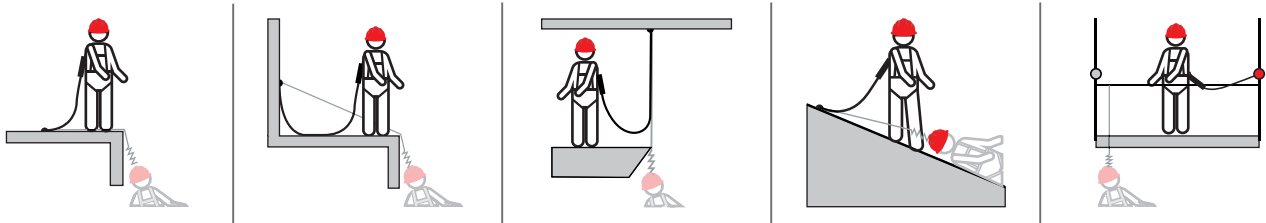

Limited Free Fall


A combination of anchorage placement and Lanyard length which will permit only a limited free fall (<600mm).

Requirements

- Full-body harness lanyard or fall-arrest device that will limit free-fall 600 mm max.
- 12kN ultimate strength anchorage or equivalent horizontal lifeline or rail.

Typical Application

Any situation where the use of either a short lanyard or a fall-arrest device (or both where applicable) will limit any free fall to 600 mm.

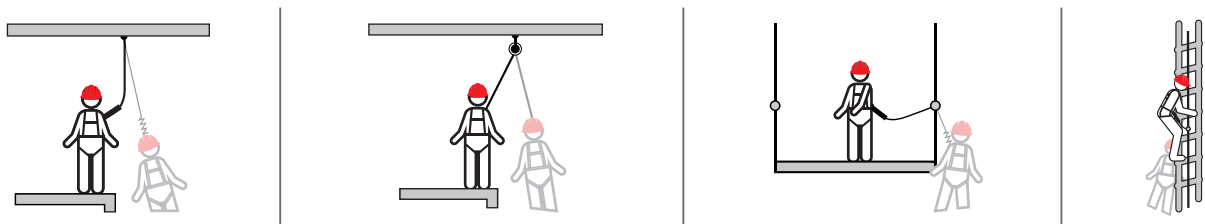

Restraint Technique

A combination of anchorage placement and lanyard length adjustment which will not physically permit the operator to reach a fall risk position unless the lanyard is incorrectly adjusted. Control on a person's movement by use of a Fall-arrest system, which entails connection to an anchorage using an adjustable lanyard or other components that can be adjusted for length as necessary to physically prevent the person from reaching a position at which there is a risk of a free or limited free fall.

Requirements

Where any possible fall will only be a limited free fall (<600 mm):


- A lower-body harness.
- Anchorage with ultimate strength 12 kN.

All other cases:

- A full-body harness.
- Anchorage with ultimate strength 12 kN.

Typical Application

Any situation where access to the work can be achieved entirely on a working surface with secure footing and without exposure to a fall provided that the equipment is correctly adjusted.



Total Restraint

A system where no fall is possible.


Requirements

Full Body Harness

Adjustable Lanyard to prevent the user from reaching areas or positions where the risk of a fall from a height exists. (Lanyards without shock absorbers are allowed).

Typical Application

Total Restraint is defined as the control on a person's movement by means of a connection to an anchorage in such a way that it will physically prevent the person from reaching any position at which there is risk of a fall, either over an edge, through a surface or due to a failed movable platform.



Work Positioning

A Work Positioning System is one that is designed to hold and sustain the user at a work location and limit the free fall to 600mm maximum. A work positioning system **MUST** not be used for fall arrest.

A Restrained Fall is the use of equipment such as a harness and adjustable lanyard which can be adjusted by the user to maintain a restraint condition in different situations as the distance from anchorage to a potential fall zone varies. It assumes that the level of user training and competence is adequate to counter the additional risk factor.

Requirements

Full-body or lower-body harness and pole strap.

Typical Application

Working on a pole where no more than 600mm maximum free fall is possible.



Rope Access / Working in Suspension


A Suspension System is designed to suspend and support the user while being transported (raised up or down) vertically and does not allow free fall. After a fall in a full body harness, the user may be suspended in a position that they can not recover themselves from, like over the edge of a platform. The rescuers will setup the rescue kit, attach the rescue system to the victim and detach them from their fall arrest device, raise or lower them to safety.

Requirements

- Full-body harness with two fall arrest attachment points, a primary attachment for suspension along with a secondary backup system. The use of a podium seat may be required for longer periods of suspension work, The ventral (waist) attachment points on the harness are best for suspension. Suitable anchor points rated to 12kN or a tripod or davit system.
- 12kN anchor point will be required if a fall greater than 600mm may occur.

Typical Application

- Confined space work where you may be required to be lowered or lifted out of a tank.
- Window Cleaning
- Painting



Rescue and Evacuation


A Rescue system is designed to raise or lower a user to safety in the event of an emergency. No free fall should be possible.

Requirements

A full body harness, a suitable anchorage point to ensure the rescuer is safe. A rescue system that can either raise or lower the rescued user to safety. A backup fall arrest system for the rescuer, suitable anchor points rated to 15kN.

Typical Application

Rescuing a worker who has taken a fall who cannot climb to safety.



Understand Your Work Application

Work Application

Before working at height a full risk assessment and job safety Analysis shall be completed to understand the proper use and limitations of PPE equipment.


Equipment Used: PPE Products, Harness, Connector, Anchor.

Be Aware of The Following Safety Point

Roof Work

- Ensure anchor points are correctly installed, fitted and are suitability rated and certified.
- When using rope & rope grabs always ensure the rope line is taut from both anchor points.
- Shock absorber connection shall be between harness frontal or rear attachments and rope grab via karabiner.
- Make sure you utilize the rear or frontal Fall arrest attachment points of your harness while working at all times.
- All fall arrest attachment points on a harness are marked with "A".
- If there are no anchor points present you should use an appropriate anchorage system to a suitable structure ensuring the structure can support a fall arrest situation.


Equipment Used: Full body harness with rear or frontal Fall arrest attachment points, Approved rope & rope adjuster with shock absorber pack. Temporary metal roof anchor or Anchorage sling.



Ladder Work

- For fixed ladder safety lines ensure it has been certified, maintained, and operating safely before use.
- With mobile ladders ensure the ladder has been secured properly with certified ladder brackets.
- Use certified anchor systems such as anchor strap, fixed anchor point or temporary anchor point.
- Ensure safety rope line is correctly tied off and rope grab is fixed to frontal connection points of harness with karabiner.
- Always use a full body harness and twin lanyard with shock absorber for ladder work.


Equipment Used: Full body harness with rear or frontal Fall arrest attachment points, Twin lanyard with shock absorber. Approved rope & rope adjuster, Anchorage sling, certified ladder.



Construction & Maintenance

- Ensure anchor points are correctly installed, fitted and are suitability rated and certified.
- When using rope & rope grabs always ensure the rope line is taut from both anchor points.
- Ensure fall arrest systems have been regularly serviced and in good working condition.
- Use single lanyard or twin elasticated lanyards with shock absorber.
- Make sure you utilize rear or frontal Fall arrest attachment points of your harness whilst working at heights.
- With static lines ensure the system is certified and in good condition and working order.


Equipment Used: Full body harness with rear or frontal Fall arrest attachment points, Single or Twin lanyard with shock absorber, Suitable Inertia reels, Anchorage sling, suitable anchor.

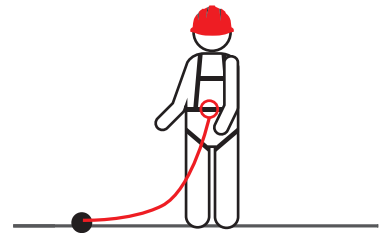

Tower Work

- Ensure anchor points are correctly installed, fitted and are suitability rated and certified.
- When using rope & rope grabs always ensure the rope line is taut from the anchor points.
- Ensure fall arrest equipment has been regularly serviced and in good working condition.
- Make sure you utilize rear Fall arrest attachment point harness with twin lanyard and belay loops with pole strap of your harness whilst working at heights.
- With permanent ladder systems ensure the structure is certified and in good condition and working order.


Equipment Used: Full body Tower workers harness, Twin tie back lanyard with shock absorber, work positioning lanyard, approved rope adjuster, Adjustable pole straps, anchorage sling, Temporary horizontal lifelines and Self retracting Life lines.



Elevated Work Platforms

- Ensure anchor points and elevated work platforms are correctly installed, fitted and are suitability rated and certified.
- Ensure fall arrest equipment has been regularly inspected, serviced and in good working condition.
- Make sure you utilize rear Fall arrest attachment points of your harness with either webbing, adjustable or elastic single lanyard of your harness whilst working at heights.


Equipment Used: Full body harness with rear or frontal Fall arrest attachment points, Single lanyard with shock absorber.

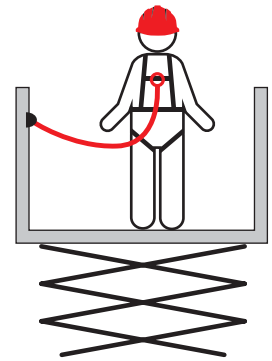

Confined Space & Rescue

- Ensure confined space and / or rescue equipment is being regularly inspected, serviced and in good working condition
- Ensure tripod or davit system are correctly installed, fitted and are suitability rated and certified.
- Prior to use, inspect the Confined Space Harness, Type 3 Rescue retrieval SRL, Inertia reel and Rescue winch to ensure they are in good working condition.
- Make sure you utilize the rescue loops for rescue operation of the Confined Space harness
- With spreader bar the arm straps should be utilized.


Equipment Used: Full body Confined Space harness with rear Fall arrest attachment points and shoulder confined space loops, Type 3 Rescue Device, Winch, Confined space spreader bar, Tripod or Davit arm.

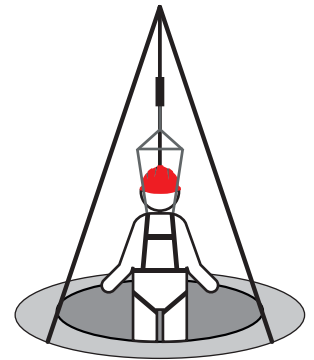

Rescue & Evacuation

- Ensure you have a suitable rescue plan before commencing work at heights.
- Select a rescue kit suitable for the environment the rescue may be required for. (Length, do you need to lift or lower)
- Ensure fall arrest equipment has been regularly inspected, serviced and in good working condition.
- Make sure you utilise front rear or frontal Fall arrest attachment points of a harness to attach the rescue recovery system to give you full control and view of rescue.


Equipment Used: Full body harness with rear or frontal Fall arrest attachment points, Shock absorbing lanyard, rescue kits and a rescue pole, Suitable anchor point.



Scaffolding

- Ensure when connecting to the structure, the anchor point (Scaffold structure) could support a 15 kN load.
- Ensure fall arrest equipment has been regularly serviced and in good working condition.
- Make sure you utilise rear Fall arrest attachment points of your harness with twin lanyard and scaffold hooks whilst working at heights.
- Twin retractable units attached to the back dee of the harness may be more suitable in lower scaffolding builds due to the reduced fall factor.


Equipment Used: Full body harness rear or frontal Fall arrest attachment points, Twin shock absorbing lanyard or twin retractable lanyard with scaffold hooks.



Warehousing

- Ensure anchor points on elevation cage are correctly installed, fitted and are suitability rated and certified.
- Ensure fall arrest equipment has been regularly inspected, serviced and in good working condition.
- Make sure you utilise rear fall arrest attachment point with retractable webbing lanyard to reduce the fall factor to the shortest possible length while giving you maximum range of movement.


Equipment Used: Full body harness with rear or frontal Fall arrest attachment points, Retractable Lanyard, Accessible anchor point or anchor sling.

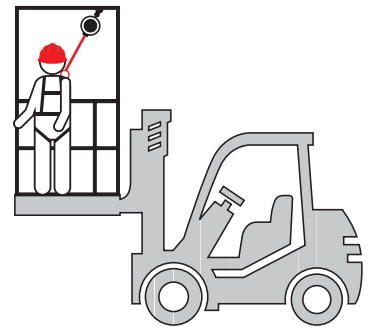


Utilities

- Ensure when connecting to the cross arm of the pole it is able to sustain the force of a limited fall (12kN).
- Ensure fall arrest equipment has been regularly serviced and in good working condition.
- Make sure you utilise rear or frontal Fall arrest attachment points of your harness with shock absorbing lanyard and pole strap attachments with pole strap on your harness whilst working at heights.
- Always ensure you are connected, the use of two pole straps will allow for the transition from below to above the cross arm beam while maintaining one connection at all times.

Equipment Used: Full body harness with rear or frontal Fall arrest attachment points, Pole strap attachment points, pole strap and secondary fall arrest lanyard.

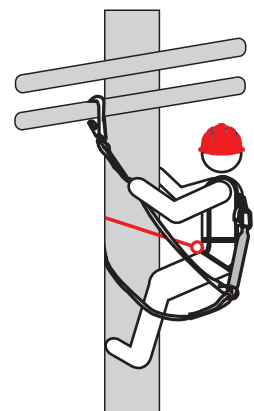

PPE Applicable in Industries

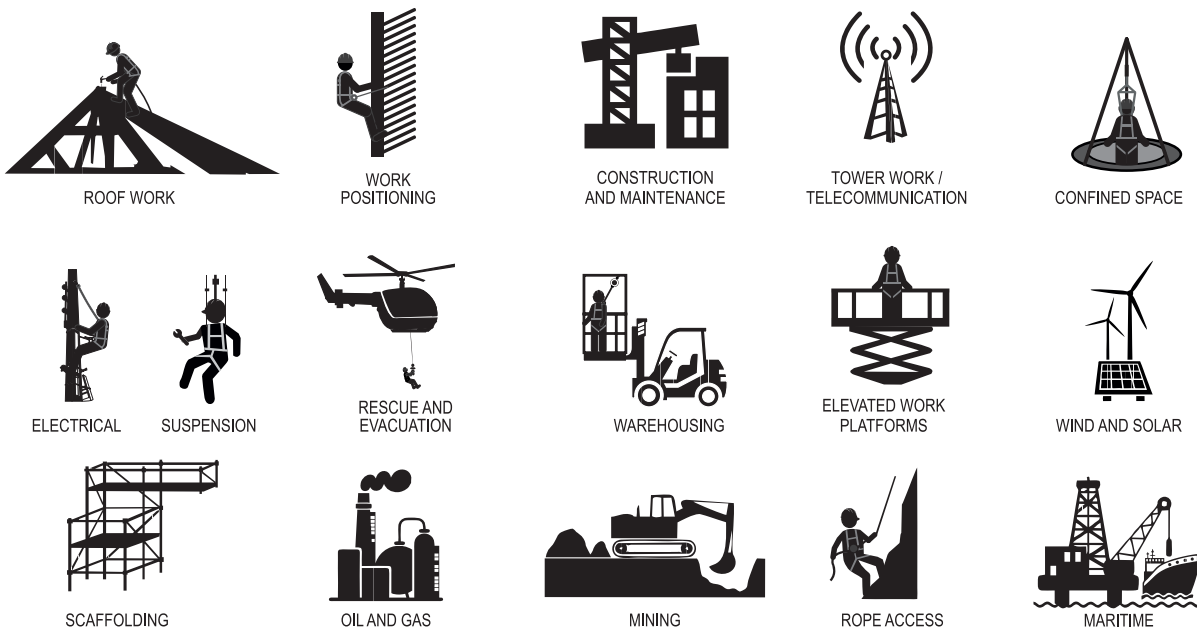

Height Safety Training & Consultation

KStrong offers a range of courses designed for those who work at heights or may find themselves needed to access a roof or other raised area as well as working in confined space areas. Our training covers all levels from beginners with height safety and elevated work platform courses through to more advanced confined space training.

Our experienced and professional team can provide advice for facility and building managers, contractors, and maintenance technicians regarding all aspects of working safely at heights and height safety systems.

With the ability to conduct site visits, we can ensure your business can be prepared to respond to all related Height Safety activities.

Instructions For Periodic Examinations

- As per EN 365 of PPE Regulation 2016, It is necessary to carry out regular periodic examinations. The safety of the users depends upon the continued efficiency and durability of the equipment.
- The personal protective equipment shall be examined at least every 12 months.
- The periodic examination can only be carried out by the manufacturer or his authorized representative.
- The comments should be included in the check card of the equipment. After the periodic examination, the next due date for periodic examination will be determined.
- During periodic inspection it is necessary to check the legibility of the equipment marking.
- To check metals for sharp edge, burs, corrosion, bent profile distortion and opening & closing or such mechanisms for which that is intended for.
- To check webbings/ropes for breakage, untwisting, frayed, burn, paint, excessive dust or soiling, cut, exposure to chemical or any such elements which can harm the webbing/ropes or can result in compromised performance of the entire system or the device in which it is used.
- Shall be discarded as per procedures given under point instructions for disposal.
- The required annual examinations will validate the correct functioning of the equipment. It is compulsory that the equipment is examined by the manufacturer or his authorized representative at least once a year.
- In case that it has been used to arrest a fall, the equipment must be withdrawn from use.

Removal of Equipment from service

- 12 monthly service and/or periodical inspection is due
- It has been involved in a fall
- Labels have been removed, are missing or illegible
- Excessive abrasive wear (furry or frayed surfaces) has occurred
- Broken fibres, tears, cuts, snags and splinters are present, weld burns are present
- Deterioration or stretching has occurred
- Loss of resilience, discolouration or visible damage is experienced
- Parts and mechanisms are not moving freely or are corroded
- There is reduction in cross-section of rope area or webbing
- There is excessive contamination not removed by approved cleaning methods

Instructions For Maintenance

Cleaning:

The personal protective equipment must be cleaned without causing adverse effect on the materials used in the manufacture of the equipment. For textile (webbing and ropes) and plastic parts wipe with cotton cloth or a soft brush. Do not use any abrasive material.

For intensive cleaning wash the harness at a temperature not more than 40⁰ Celsius using a neutral detergent, then dry in shade.

Metallic parts incorporated in the harness should be wiped with a wet cloth. When the equipment becomes wet, either from being in use or when due to cleaning, it shall be allowed to dry naturally, and shall be kept away from direct heat.

Storage:

Personal protective equipment should be stored loosely packed, in a dry and well ventilated place, protected from direct light, UV degradation, dust, sharp edges, extreme temperature and aggressive substances. Try to store PPE in original packaging.

Repair:


Any repair shall only be carried out by equipment manufacturer or his authorized representative following manufacturer's procedures.

Segregate the equipment in three different crates for placing components in them respectively as- Textile, Metal and Plastic.



Complying with EN 365 of PPE Regulation 2016, which indicates the need to have Competent Authorities inspect the Fall Protection Equipment at least once annually, Compass focuses on responsible after-sales services which include Inspection and revalidation of Personal Protective Equipment (PPE), Service and Repair of Retractable Fall Arrestor Blocks and Inspection, Repair and Revalidation of Fixed Line Systems (FLS) on an annual basis.

Maintains competent and vigorous after sale service establishments throughout Asia.

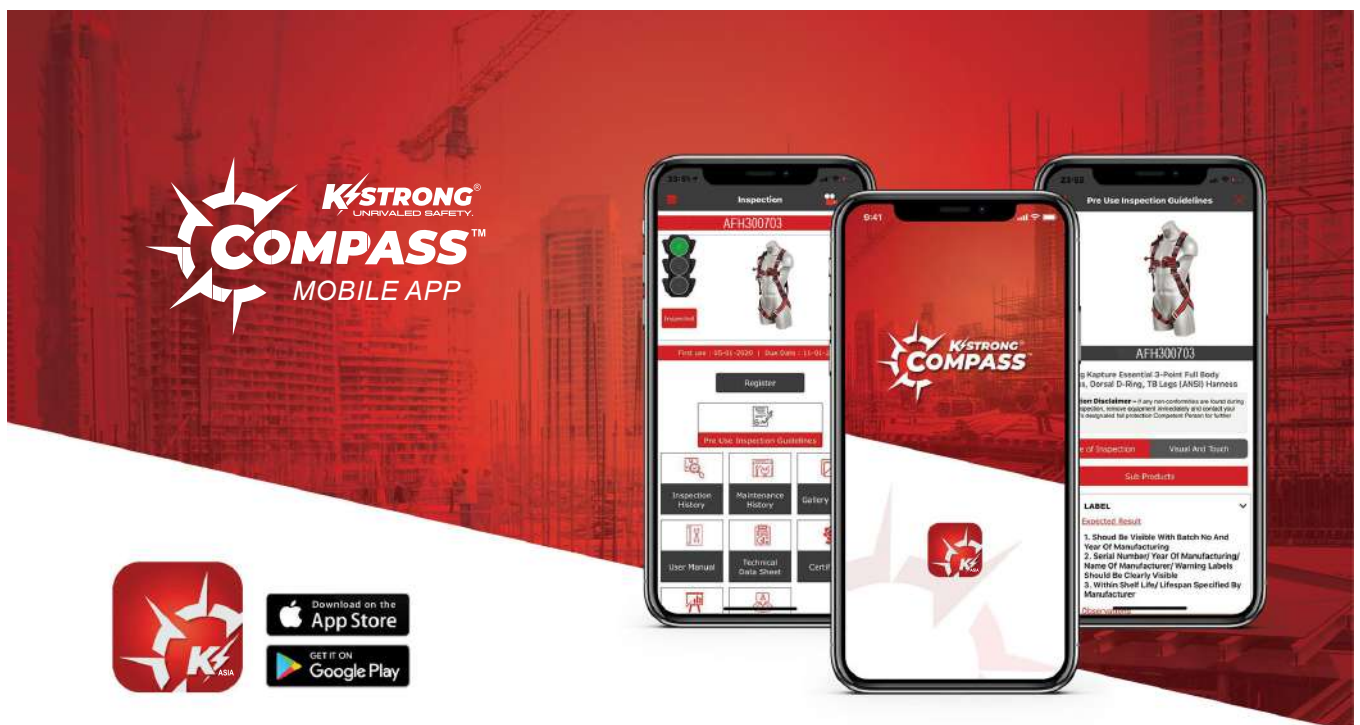

KStrong Unrivaled Safety

Lanyards – Self-Retracting Lifelines – Connectors – Anchors – Confined Space – Rescue Retrieval Equipment – Engineered Vertical and Horizontal Lifeline Systems

Fall protection products are lifesaving devices, and the mere procurement for your workforce does not guarantee complete safety. After making an investment in your fall protection equipment, it is critical that the end user is properly trained on its inspection and use, and is aware of the periodic maintenance process that requires that all personal protective equipment (PPE) be inspected in accordance to the requirements of employers, governmental codes and Standards such as EN and ANSI.

Chart a Course to Safety

The KStrong Compass™ is the fall protection industry's first "free at your fingertips" mobile application for fall protection equipment asset management. KStrong Compass™ is a cloud-based software app which relieves the user from a mountain of paper records. The unique AIR system (Automated Inspection Reminder system) reminds a user of a pending competent person inspection that is required to minimize accidents that may happen due to equipment that has not been properly inspected.

The KStrong Compass™ user management system allows equipment to be issued to individuals, thus ensuring accountability towards the upkeep of the equipment. The mobile app provides each user vital information on Daily inspections and periodic maintenance and helps in increasing the life of the equipment. By using KStrong Compass™ it allows companies to manage their PPE investment.



Key Benefit for All Company Risk Management and Safety Directors

During the one-time registration process, the user will be given the option of entering a second email address designated by their employer. Once the user registers or inspects a product the nominated person will receive a notification via email. Management and Safety Officers can then access their KStrong Dashboard on their phone or computer to view the inspection status of all items registered to date in real time.



How to Identify a Product

Identifying a product through labels throughout its service life is difficult. The labels get damaged often making them difficult to read or become missing altogether over time. KStrong Compass™ has the unique ability to read QR codes, RFID tags, and can even directly scan product labels. Thus, identifying a product and its user is a click away.



What Does An End-User Need to Start Using KStrong Compass™ Asia?

To download the app, an iOS or ANDROID user can simply open the camera on their phone or device and scan the QR code, RFID tag, or Label included with every KStrong product, register when prompted, and user is now ready to see that products critical data including:

Date of Manufacture – Serial Number – Batch Number – Pre use inspection tips and actions steps – User Manual – Specification Sheet – Declaration of Conformity (DoC) – Date of last Competent Person inspection and future inspection reminder setting options – Product Pics, Videos, PowerPoints, and more



ABCD's of Fall Protection

To ensure you are working safely at heights you will need the following ABCD's of Fall protection to operate a Safe fall protection system.

Anchorage: An Anchor is a device that completes the fall arrest system when it secures the user to a structure either fixed or mobile.

Types of Anchors: Horizontal Lifelines, Fixed Anchors, Beam Anchors and Anchor Straps.

Body Support: The full body Harness is the main point of contact between the user and the shock absorbing attachment via the attachment points on the harness.


Types of Harnesses: Rescue, Construction & Tower.

Connecting Device: The device which connects a Full Body Harness to an Anchor and is the connecting element to the system.


Types of Attachments: Shock Absorbing Lanyards, Restraint Lanyards, Rope Lines & Fall Arrest Blocks (SRL's).

Descent & Rescue: In the event of a fall there must be a system or Rescue Plan in place to allow the user to descend or ascend safely or be rescued without endangering the user or other colleagues.


Types of Rescue: Rope Rescue Kits, Tripods and Davits Systems.

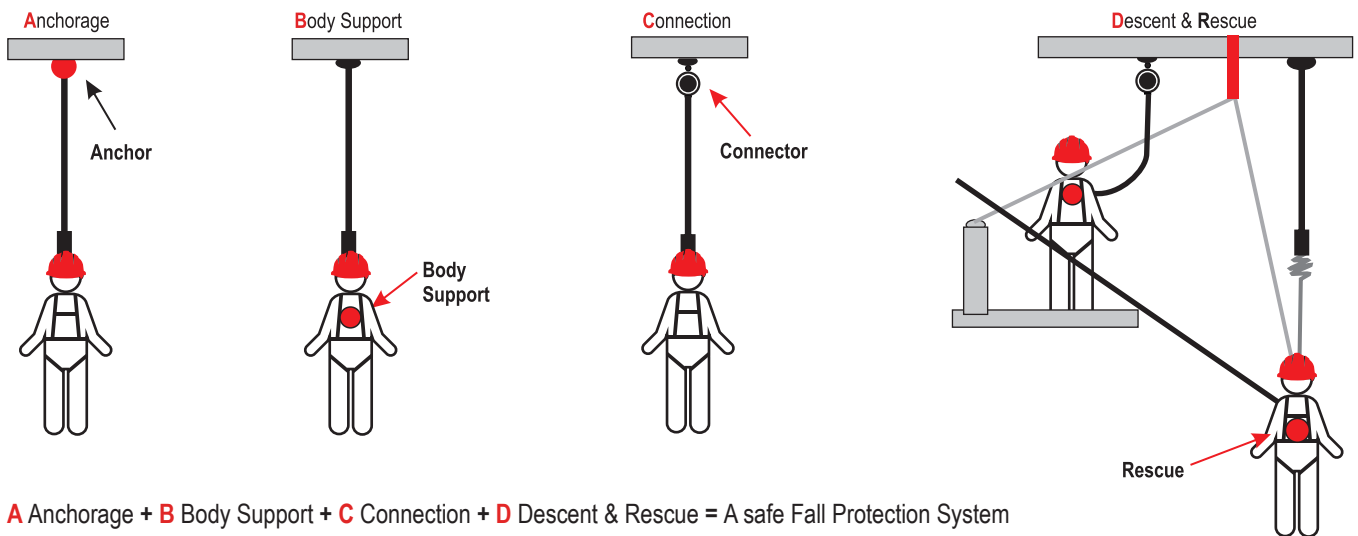


When to use Fall Protection




Fall Protection Equipment should be used when the worker is working above 2 mtr.



Fall Protection Equipment should be used when the worker is working near an edge of open pit / hole.



If unable to use Fall arrest System, then you should be using a Restraint system as a minimum.




Use a physical Barrier (Passive protection) when working near an edge if possible

UNDERSTANDING FALL PROTECTION

Standards




EN 341
PPE against Falls from a Height
Descender Devices




EN 353-1,2
PPE against Falls from a Height
Guided Fall Arresters



EN 354
PPE against Falls from a Height
Equipment Lanyards



EN 355
PPE against Falls from a Height
Energy Absorbers



EN 358
PPE for
Work Positioning



EN 360
PPE against Falls from a Height
Retractable Fall Arrester Blocks



EN 361
PPE against Falls from a Height
Full body Harnesses




EN 813
PPE against Falls from a Height
Sit Harness



EN 15151
Mountaineering equipment
Breaking Devices



EN 1496
Rescue Equipment
Rescue Lift System



EN 1497/ EN 1498
Rescue Equipment
Rescue Harnesses



EN 1891
PPE against Falls from a Height
Kernmantle Ropes



EN 892
PPE against Falls from a Height
Stretchable Ropes



EN 12277
Mountaineering Harness




EN 12841
Rope Access System



EN 567
Mountaineering Rope Clamps



EN 362
PPE against Falls from a Height
Connectors



EN 795/ EN 795/A1
PPE against Falls from a Height
Anchor Devices




EN 12278
Pulley



EN 12492
Mountaineering Helmet




EN 397
Industrial Safety Helmet



EN 566
Slings



EN 795 Type B
Stationary Anchor Points While In Use, And With The Need For A Structural Anchor



EN 795 Type E
Performance Relies Solely on Mass and Friction




EN 795 Type A
Stationary Anchor Points While In Use, And With The Need For A Structural Anchor



EN 795 Type C
Flexible Anchor Line



EN 795 Type D
Rigid Anchor Line



TS 16415
Anchors for more than 1 users

FULL BODY HARNESSES



What is a Full Body Harness?

The full body harness is a key part of an active fall arrest system. The harness distributes the impact forces safely across the user's body in the event of a fall whilst ensuring that the user who has fallen, remains suspended in an upright position after the fall has occurred. It also provides freedom of movement sufficient to allow the user to effectively perform his or her job safely.

Inspecting a Harness

When working at height your Harness should be inspected before use. This action is an essential part of your personal safety. It is your responsibility to ensure that your Personal Protection Equipment undergo periodic inspection as per EN365 of PPE Directives. With Personal Protection Equipment that has been subjected to harsh conditions inspection intervals shall be performed more frequently even if the set life expectancy of the product still has a long expiry date

We also recommend the inspection, or any service work be recorded on the Equipment Record sheet located at the rear of User Instruction Manual. Please keep the Equipment Record in a safe place. All harnesses are equipped with Compass Inspection software.

Inspect Before Your Use it

Inspect the Labels

All labels should be intact and legible.



Inspect the Hardware

Look for damaged, broken or missing D-Rings, Buckles or Eyelets. Release tabs on buckles must work freely and click when engaged.



Inspect the Impact Indicator

The impact indicator is a section secured with a special stitched pattern designed to release when the harness has been subjected to impact loading from a fall. If the impact indicator is broken, prevent any future use by destroying and discarding the harness.



Inspect the Webbing


Look for frayed, cut or broken fibers or stitches as they may indicate the harness has been subject to a fall. Look for other signs or damage such as: Tears, abrasions, mold, burns or discoloration.



Note: Check the manufacturer's inspection list to be sure you are not missing anything.


Once the user is convinced that the harness is devoid of any visual physical damage, and has not been involved in a fall, it is now safe to wear.

How to wear a Harness?

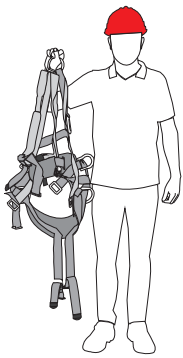

Step-1

Untangle the harness by holding it from the dorsal D-ring.

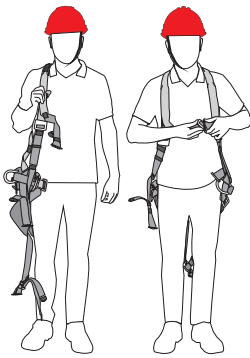

Step-2

Slip harness over shoulders and close the buckle on the chest.




Step-3

Close the buckle on waist strap if Harness has waist belt.



Step-4

Pull the leg straps one by one round your thighs outwards to your front.

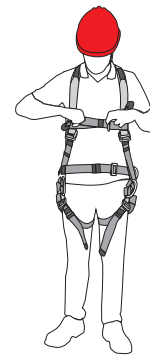

Step-5


To check and adjust all the straps of the harness to your body adjustment.



Step-6

Now ready to work.


Harness Sizing Chart

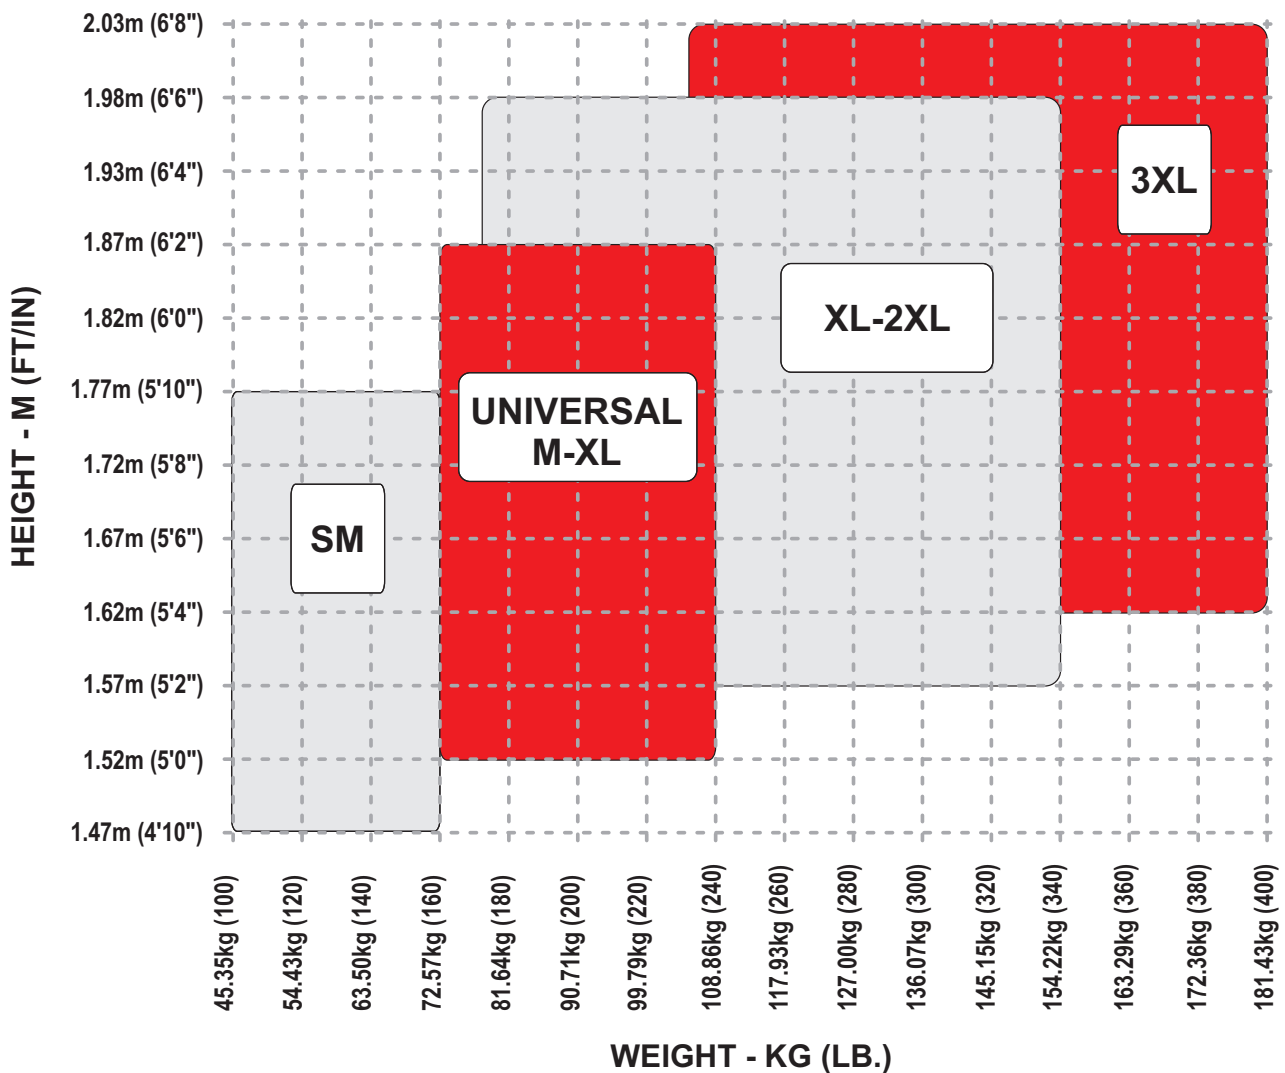

Attachment Points of Harness and its Uses


Dorsal Attachment Point

This point is meant for fall arrest. It is located on the ID plate on the back of the Harness between the shoulder blades. Dorsal attachment point is ideal for fall arrest purposes because it evenly distributes the forces of fall arrest across a person's body. It is suitable for standard site work or platform working, where the worker only needs to be attached with no other requirement for climbing, work positioning.




Sternal Attachment Point

Ergonomically placed Sternal D ring on the chest area of the Harness is used as a front attachment point for fall protection when using a guided type fall arrester while climbing or entering a confined space.




Lateral Attachment Point

2 Lateral D-rings located on the sides in the lower waist area of the harness is used for work positioning. It allows a worker to have both their hands free to work while they remain connected to the work area. It should be noted that these attachment points are not to be used for fall arrest, but instead this system is a form of fall restraint.

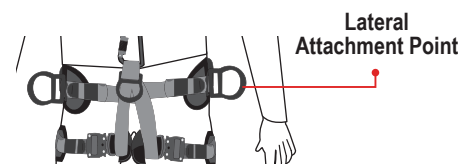

Ventral Attachment Point

This attachment point is located in the centre of the waist level of the Harness. It is used for rope access, rescue and many other applications.

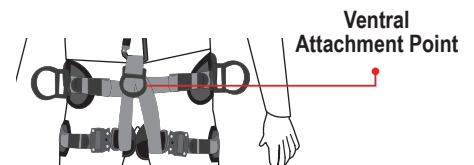


Extension Strap Attachment Point

The Extension Band allows the user to easily connect to or disengage the Dorsal attachment D-ring without any external help. It is suitable for standard site work or platform working, where the worker only needs to be attached with no other requirement for climbing, work positioning and roof work.




Rescue Attachment Points

Located on shoulders of harness in the form of webbing loops or steel D-rings. Allowing easy attachment of Spreader bar. Used for confined space entry/exit and rescue and retrieval.



'A' Attachment Point

The Labels marked as 'A' denote the Attachment points on the Harness. In certain areas the labels are marked 'A/2', meaning that two similar points held together shall constitute a single Attachment point.



KAPTURE™ EPIC LV3 || FULL BODY HARNESSES

Kapture™ Epic Range

KStrong EPIC Series has been ergonomically designed with AirLite padding to provide extreme comfort with breathable foam and fabric to keep you cooler for longer. It has lightweight Aluminium fittings and is suitable for all environments due to the Endure Guard Technology which provides liquid protection against Oil, Dirt & Water. It also has the Integrated Compass Asset Management feature located in the Label Pack.

FEATURES

Confined Space Loops

Lanyard Keepers

Lanyard keepers for safely attaching and resting a lanyard. Designed to release lanyard when 25kg or more force is applied.

Aluminum Quick Buckles

Suspension Trauma Straps

The Suspension Trauma Strap is designed to prevent suspension trauma while a worker is awaiting rescue.

Protective Label Pack

Label Pack providing protection for Harness labels, instructions & QR code directing to Compass Asset Management portal.

Aluminium D-rings & Hardware

Light Weight Aluminium D-Rings and Hardware.

Fall Indicators

Designed to release when the harness has been subjected to an impact loading from a fall. If the Fall indicator is broken, discard and destroy the harness.

Fall Arrest Extension Strap

Extension Strap is attached to the rear D of a harness to allow users to attach a lanyard at waist level saving time.

Airlite Shoulder, waist & leg padding

AirLite padding with breathable foam and fabric allowing supreme comfort and increased air flow during long periods of use. Fitted to the Shoulders, Waist and Legs with Reflective stripes.



***Note:** Endure Guard Webbing provides liquid protection against Oil, Dirt & Water with added abrasion resistance.

Used in Industry



CE EN 361:2002
EN 358:2018

KAPTURE™ EPIC LV3 || FULL BODY HARNESSES

AFH300401 Riggers Harness



FEATURES

- Air Lite shoulder padding
- Aluminum Rear Dorsal D-Ring and Front Fall arrest D-Ring
- Fall arrest extension strap
- Fall indicators
- Lanyard Keepers
- Suspension trauma straps
- Aluminum quick connect buckles
- Confined Space Loops
- Endure guard webbing
- Adjustable shoulder, chest and leg straps

MATERIAL

- Webbing- Polyester
- Metal Component- Aluminium
- Padding- Comfort pad made up of Air mesh Insushield and Matty



AFH300402 Construction Harness



FEATURES

- Air Lite Padding
- Aluminum Rear Dorsal D-Ring and Front Fall arrest D-Ring
- Fall arrest extension strap
- Fall indicators
- Lanyard Keepers
- Suspension trauma straps
- Aluminum quick connect buckles
- Work positioning waist belt with side D-Rings
- Confined Space Loops
- Endure guard webbing
- Adjustable shoulder, chest and leg straps

MATERIAL

- Webbing- Polyester
- Metal Component- Aluminium
- Padding- Comfort pad made up of Air mesh Insushield and Matty



KAPTURE™ EPIC LV3 || FULL BODY HARNESSES

AFH300403 WIND HARNESSES



FEATURES

- Air Lite Padding
- Aluminum Rear Dorsal D-Ring and Front Fall arrest D-Ring
- Fall indicators
- Lanyard Keepers
- Suspension trauma straps
- Aluminum quick connect buckles
- Work positioning waist belt with side D-Rings
- Confined Space Loops
- Endure guard webbing
- Adjustable shoulder, chest and leg straps
- Rear Plate provides the harness and the wall of the turbine from damage whilst climbing.

MATERIAL

- Webbing- Polyester
- Metal Component- Aluminium
- Padding- Comfort pad made up of Air mesh Insushield and Matty



AFH300404 Rescue Harness



FEATURES

- Air Lite Padding
- Aluminum Rear Dorsal D-Ring, Front Fall arrest D-Ring and Ventral D-Ring
- Aluminum quick connect buckles
- Work positioning waist belt with side D-Rings & Gear Loops
- Endure guard webbing
- Suitable for Retrofit Croll
- Adjustable shoulder and leg straps

MATERIAL

- Webbing- Polyester
- Metal Component- Aluminium
- Padding- Comfort pad made up of Air mesh Insushield and Matty



KAPTURE™ EPIC LV3 || FULL BODY HARNESSES

AFH300404C Rescue Harness with CROLL



FEATURES

- Air Lite Padding
- Aluminum Rear Dorsal D-Ring, Front Fall arrest D-Ring and Ventral D-Ring
- Aluminum quick connect buckles
- Work positioning waist belt with side D-Rings & Gear Loops
- Endure guard webbing
- Equipped with an integrated CROLL ventral rope clamp on the ventral attachment point for greater efficiency and freedom of movement in rope ascent.
- Adjustable shoulder and leg straps

MATERIAL

- Webbing- Polyester
- Metal Component- Aluminium
- Padding- Comfort pad made up of Air mesh Insushield and Matty



AFH300405 Tower Harness



FEATURES

- Air Lite Padding
- Aluminum Rear Dorsal D-Ring and Front Fall arrest D-Ring
- Fall arrest extension strap
- Fall indicators
- Lanyard Keepers
- Suspension trauma straps
- Aluminum quick connect buckles
- Work positioning waist belt with side D-Rings
- Removable Work positioning seat with extended pole D-Ring
- Confined Space Loops
- Endure guard webbing
- Adjustable shoulder, chest and leg straps

MATERIAL

- Webbing- Polyester
- Metal Component- Aluminium
- Padding- Comfort pad made up of Air mesh Insushield and Matty



KAPTURE™ EPIC LV3 || FULL BODY HARNESSES

AFH300407 Confined Space / Evac Harness

FEATURES

- Airlite Leg Padding
- Elasticated webbing in the upper part for more comfort and impact resistance
- Confined Space Rescue Loops
- Attachment points on Rear D-Ring and Front Fall arrest D-Ring
- Lanyard Keepers
- Fall indicators
- Adjustable shoulder, chest and leg straps

MATERIAL

- Webbing- Polyester
- Metal Component- Steel



M-L



1.23 kg



140 kg



EN 361:2002

Used in Industry



3-Point Adjustment



2-Point Attachment



AFH300409 Derrickman's Harness

FEATURES

- AirLite Padding
- Extension Strap with Large rear fall arrest D-ring
- Front Fall Arrest D-Ring
- Aluminum Quick Buckle on Chest Strap
- Integrated Monkey Board Attachments
- Work Positioning Belt with side D Rings and rear Restraint D-Ring
- Seat Sling with positioning/suspension D-rings
- Tongue & Buckle waist and leg straps
- Confined space/retrieval attachment points
- Suspension Trauma Straps
- Impact Fall Indicator
- Endure coated Oil, Dust & Water repellent webbing
- Label / Instruction pouch

MATERIAL

- Webbing- Polyester
- Metal Component- Aluminium
- Padding- Comfort pad made up of Air mesh Insushield and Matty



M-L



3.3 kg



140 kg



ANSI Z359.11-2014

Used in Industry



4-Point Adjustment



4-Point Attachment



KAPTURE™ EPIC LV3 || FULL BODY HARNESSES

AFH300410 Derrickman's Lite Harness



FEATURES

- Extension Strap with Large rear fall arrest D-ring
- Front Fall Arrest D-Ring
- Aluminum Quick Buckle on Chest Strap
- Integrated Monkey Board Attachments
- Lanyard Keepers
- Work Positioning Belt with side D Rings and rear Restraint D-Ring
- Seat Sling with positioning/suspension D-rings
- Tongue & Buckle waist and leg straps
- Confined space/retrieval attachment points
- Suspension Trauma Straps
- Impact Fall Indicator
- Endure coated Oil, Dust & Water repellent webbing
- Label / Instruction pouch

MATERIAL

- Webbing- Polyester
- Metal Component- Aluminium
- Padding- Comfort pad made up of Air mesh Insushield and Matty



M-L



3.1 kg



140 kg



ANSI Z359.11-2014

Used in Industry



AFZ190001 Monkey Board Belt

FEATURES

- The belt has a large frontal pad providing extra comfort while positioning drilling pipes.
- Monkey board belt with mating buckles to attach directly to AFH300409 & AFH300410 Harnesses
- Two large Steel front D-Rings provide work positioning options
- Compact and lightweight

MATERIAL

- Webbing- Polyester
- Metal Component- Alloy Steel
- Padding- polyester and nylon



M-L



2.0 kg



140 kg



ANSI Z359.11-2014

Used in Industry



* Harness not supplied (Illustration only)

KAPTURE™ EPIC LV3 || FULL BODY HARNESSES

AFX201023 Bosun's Chair

FEATURES

- A rigid board design with cushioned seat
- Side attachment points to support a range of tools
- Suspension D-rings to attach to the harness
- Compact and lightweight design
- Endure coated Oil & Water repellent webbing
- Rated to 140kg

MATERIAL

- Webbing: Endure Guard Coated Polyester 44mm wide
- Base: Birch Plywood
- Cushion: Microfibre & Foam
- D-Ring: Aluminum Black Anodized
- Fittings: Steel Galvanized



M-L



kgs 4.3 kg



140 kg



ANSI Z359.11-2014

Used in Industry



AFH300406 Climbing Sit Harness

FEATURES

- Climbing Sit harness
- Webbing attachment on the Ventral
- Air lite waist padding
- Endure guard webbing

MATERIAL

- Webbing- Polyester
- Steel Buckles- ED Coated



1-Point Adjustment



1-Point Attachment



M-L



kgs 0.60 kg



140 kg



EN 12277:2015
+A1:2018 Type C

Used in Industry



KAPTURE™ ELITE LV2 || FULL BODY HARNESSES

Kapture™ Elite Range

KStrong Elite has been designed with the Users safety in mind. Its been ergonomically designed to ensure comfort and practicality allowing the user to work freely and safe in all environments. It also has the Integrated Compass Asset Management feature located in the Label Pack.

FEATURES

Label Pack

Label Pack providing protection for Harness labels, instructions & QR code directing to Compass Asset Management portal.

Lanyard Keepers

Specially designed breakaway lanyard keepers for safely attaching and resting a lanyard. Designed to release lanyard when 25kg or more force is applied.

High Tensile Steel Fittings



Fall Arrest Extension Strap

Extension strap is attached to the rear D-ring of a harness to allow users to attach a lanyard at waist level saving time.

Front Fall Arrest Steel D-ring

Front Fall Arrest Attachment point allowing easy connection to the fall arrest System.

Confined Space Rescue Loops

Confined space and rescue/retrieval applications.

Rear Dorsal Steel D-Ring

Fall Arrest Attachment point allowing easy connection to the fall arrest System.

Fall Indicators

Designed to release when the harness has been subjected to a impact loading from a fall. If the Fall indicator is broken, discard and destroy the harness.

Sub Pelvic Strap

Sub Pelvic strap helps distribute body weight evenly across the legs and pelvis and prevents any possibility of peeling out of the harness during a fall.



cross section of webbing

***Note:** High tenacity Polyester Dope dyed yarn providing Increased strength and protection against UV and Abrasion. Colour contrasted for ease of identification.

Used in Industry



CE EN 361:2002
EN 358:2018

KAPTURE™ ELITE LV2 || FULL BODY HARNESSES

AFH300201

FEATURES

- Attachment point on Rear D-Ring
- Lanyard Keepers
- Fall indicators
- Adjustable shoulder, chest and leg straps

MATERIAL

- Webbing- Polyester
- Metal Component- Steel



Used in Industry



AFH300202

FEATURES

- Attachment points on Rear D-Ring and Front webbing loops
- Lanyard Keepers
- Fall indicators
- Adjustable shoulder, chest and leg straps

MATERIAL

- Webbing- Polyester
- Metal Component- Steel



Used in Industry



KAPTURE™ ELITE LV2 II FULL BODY HARNESS

AFH300203

FEATURES

- Confined space rescue loops
- Attachment points on Rear D-Ring and Front Fall arrest D-Ring
- 300mm Extension Strap
- Lanyard Keepers
- Fall indicators
- Adjustable shoulder, chest and leg straps

MATERIAL

- Webbing- Polyester
- Metal Component- Steel



M-L



kgs 1.23 kg



140 kg



EN 361:2002

Used in Industry



3-Point Adjustment



2-Point Attachment



AFH300204

FEATURES

- Confined space rescue loops
- Attachment points on Rear D-Ring and Front Fall arrest D-Ring with two additional D-Ring attachment points
- Fall indicators
- Adjustable shoulder, chest and leg straps

MATERIAL

- Webbing- Polyester
- Metal Component- Steel



M-L



kgs 1.54 kg



140 kg



EN 361:2002

Used in Industry



3-Point Adjustment



3-Point Attachment



KAPTURE™ ELITE LV2 II FULL BODY HARNESSES

AFH300206

FEATURES

- Elasticated webbing in the upper part for more comfort and impact resistance
- Confined space rescue loops
- Attachment points on Rear D-Ring and Front Fall arrest D-Ring
- Lanyard Keepers
- Fall indicators
- Adjustable shoulder, chest and leg straps

MATERIAL

- Webbing- Polyester
- Metal Component- Steel



AFH300250

FEATURES

- Attachment points on Rear D-Ring and Front webbing loops
- Lanyard Keepers
- Fall indicators
- Adjustable shoulder, chest and leg straps
- Padded work positioning waist belt with side D-Rings

MATERIAL

- Webbing- Polyester
- Metal Component- Steel
- Padding- Comfort pad made up of mesh Insushield and Matty



KAPTURE™ ELITE LV2 || FULL BODY HARNESSES

AFH300251

FEATURES

- Confined space rescue loops
- Attachment points on Rear D-Ring and Front Fall arrest D-Ring
- 300mm Extension Strap
- Lanyard Keepers
- Fall indicators
- Adjustable shoulder, chest and leg straps
- Padded work positioning waist belt with side D-Rings

MATERIAL

- Webbing- Polyester
- Metal Component- Steel
- Padding- Comfort pad made up of mesh Insushield and Matty



M-L



kgs 1.97 kg



140 kg



EN 361:2002
EN 358:2018

Used in Industry



4-Point Adjustment



3-Point Attachment



AFH300207

FEATURES

- Attachment points on Rear D-Ring and Front Fall arrest D-Ring
- Adjustable shoulder and leg straps
- Rear sit strap

MATERIAL

- Webbing- Polyester
- Metal Component- Steel



M-L



kgs 1.21 kg



140 kg



EN 361:2002
EN 1497:2007

Used in Industry



2-Point Adjustment



2-Point Attachment



KAPTURE™ ELITE LV2 || FULL BODY HARNESS

AFH300215

FEATURES

- Attachment points on Rear D-Ring, Front and Ventral Fall arrest D-Rings
- Adjustable and padded shoulder and leg straps
- Padded work positioning waist belt with side D-Rings

MATERIAL

- Webbing- Polyester
- Metal Component- Steel
- Padding- Comfort pad made up of mesh Insushield and Matty



AFH302101

FEATURES

- Attachment point on Ventral Fall arrest D-Ring
- Adjustable and padded leg straps
- Padded work positioning waist belt with side D-Rings

MATERIAL

- Webbing- Polyester
- Metal Component- Steel
- Padding- Comfort pad made up of mesh Insushield and Matty



KAPTURE™ ESSENTIAL LV1 || FULL BODY HARNESSES

Kapture™ Essential Range

KStrong Essential Range has been designed to meet the customer's needs. It is one of the most Versatile, Lightweight and comfortable harnesses developed in the market today. The design maintains the shape of the harness, making it easier to fit the harness. It also has the Integrated Compass Asset Management feature located in the Label Pack.

FEATURES

Label Pack

Label Pack providing protection for Harness labels, instructions & QR code directing to Compass Asset Management portal.

Adjustable Leg, Chest & Waist Straps

Adjustable Leg, Chest Strap & waist straps allowing the user to don and remove the harness with Ease.

Side D-Rings

Hi Tensile Steel D-Rings - Used for work Positioning.

Hi Tensile Steel Fittings

Hi Tensile Steel Fittings.

Rear D-Ring

Fall Arrest Attachment point allowing easy connection to the fall arrest System.

Fall Indicators

Designed to release when the harness has been subjected to an impact loading from a fall. If the Fall indicator is broken, discard and destroy the harness.

Waist Padding with Side D-Rings

Waist padding with increased comfort allowing long periods of use.

Sub Pelvic Strap

Sub Pelvic strap helps distribute body weight evenly across the legs and pelvis and prevents any possibility of peeling out of the harness during a fall.



Cut Webbing

***Note:** High tenacity Polyester Dope dyed yarn providing Increased strength and protection against UV and Abrasion. Colour contrasted for ease of identification.

CE EN 361:2002
EN 358:2018

Used in Industry



KAPTURE™ ESSENTIAL LV1 || FULL BODY HARNESS

AFH300101

FEATURES

- Attachment point on Rear D-Ring
- Adjustable chest and leg straps with SR clamp on chest strap
- Fall indicators

MATERIAL

- Webbing- Polyester
- Metal Component- Steel



2-Point Adjustment



1-Point Attachment



M-L



0.77 kg



140 kg



EN 361:2002

Used in Industry



AFH300102

FEATURES

- Attachment point on Rear D-Ring
- Adjustable chest and leg straps
- Fall indicators

MATERIAL

- Webbing- Polyester
- Metal Component- Steel



2-Point Adjustment



1-Point Attachment



M-L



0.875 kg



140 kg



EN 361:2002

Used in Industry



KAPTURE™ ESSENTIAL LV1 || FULL BODY HARNESSES

AFH301101

FEATURES

- Attachment point on Rear D-Ring
- Adjustable chest and leg straps with SR clamp on chest strap
- Fall indicators
- Comes with attached Fall arrest webbing lanyard with Karabiner

MATERIAL

- Webbing- Polyester
- Metal Component- Steel
- 12mm Polyamide Twisted Rope
- Karabiner- Steel, MBS-25kN



2-Point Adjustment



1-Point Attachment



M-L



kgs

1.225 kg



140 kg



EN 361:2002

Used in Industry



AFH301102

FEATURES

- Attachment point on Rear D-Ring
- Adjustable chest and leg straps with SR clamp on chest strap
- Fall indicators
- Comes with attached Fall arrest shock webbing lanyard

MATERIAL

- Webbing- Polyester
- Metal Component- Steel
- Scaffold Hook- Steel, MBS- 23kN



2-Point Adjustment



1-Point Attachment



M-L



kgs

1.76 kg



140 kg



EN 361:2002

Used in Industry



KAPTURE™ ESSENTIAL LV1 || FULL BODY HARNESS

AFH300103

FEATURES

- Attachment points on Rear D-Ring and Front webbing loops
- Adjustable chest and leg straps with buckle on chest strap
- Fall indicators

MATERIAL

- Webbing- Polyester
- Metal Component- Steel



AFH300104

FEATURES

- Attachment point on Rear D-Ring and Front webbing loops
- Adjustable chest and leg straps
- Fall indicators

MATERIAL

- Webbing- Polyester
- Metal Component- Steel



KAPTURE™ ESSENTIAL LV1 || FULL BODY HARNESS

AFH300121

FEATURES

- Attachment points on Rear D-Ring
- Adjustable leg straps
- Padded work positioning waist belt with side D-Rings
- Adjustable chest and leg straps with buckle on chest strap
- Fall indicators

MATERIAL

- Webbing- Polyester
- Metal Component- Steel
- Padding- Comfort pad made up of mesh Insushield and Matty



3-Point Adjustment



2-Point Attachment



M-L



kgs

1.29 kg



140 kg



EN 361:2002
EN 358:2018

Used in Industry



AFH300122

FEATURES

- Attachment points on Rear D-Ring and Front webbing loops
- Padded work positioning waist belt with side D-Rings
- Adjustable chest and leg straps with buckle on chest strap
- Fall indicator

MATERIAL

- Webbing- Polyester
- Metal Component- Steel
- Padding- Comfort pad made up of mesh Insushield and Matty



3-Point Adjustment



3-Point Attachment



M-L



kgs

1.37 kg



140 kg



EN 361:2002
EN 358:2018

Used in Industry



HARNESSES

KAPTURE™ ESSENTIAL LV1 || FULL BODY HARNESS

AFZ120011

FEATURES

Padded work positioning waist belt with side D-Rings

MATERIAL

- Webbing- Polyester
- Metal Component- Steel
- Padding- Comfort pad made up of mesh Insushield and Matty



1-Point Adjustment



1-Point Attachment



M-L



kgs

0.69 kg



140 kg



EN 358:2018

Used in Industry



KAPTURE™ ELEMENT LV4 || FULL BODY HARNESS

KStrong ElectWorX range has been designed with Non Conductive fittings allowing use where there are possible electrical hazards. Ideally used in Utilities, overhead Line teams on live wires protecting the user from Electrical discharge.

AFH300706

FEATURES

- Attachment points on Rear D-Ring and Front webbing loops
- Lanyard keepers
- Coated hardware for dielectric property 14kV
- Adjustable shoulder, chest and leg straps

MATERIAL

- Webbing- Polyester
- Metal Component- Alloy Steel core with reinforced material (14kV Dielectric)



M-L



1.90 kg



140 kg



EN 361:2002

Used in Industry



3-Point Adjustment



2-Point Attachment



AFH300707

FEATURES

- Attachment points on Rear D-Ring, Lateral and Front webbing loops
- Lanyard keepers
- Coated hardware for dielectric property 14kV
- Padded work positioning belt with side D-Rings
- Adjustable shoulder, chest and leg straps

MATERIAL

- Webbing- Polyester
- Metal Component- Alloy Steel core with reinforced material (14kV Dielectric)
- Padding- Comfort pad made up of mesh Insushield and Matty



M-L



2.243 kg



140 kg



EN 361:2002
EN 358:2018

Used in Industry



4-Point Adjustment



3-Point Attachment



KAPTURE™ ELEMENT LV4 || FULL BODY HARNESSES

KStrong ExtremeWorX harnesses have been designed to be used in the most hostile conditions whilst protecting the user. Ideally used in Offshore, Petrochemical Industry, Water Treatments plants and Food processing Industries. The Endure guard coating protects the webbing against oil, water, & dirt, as well as enhancing the abrasion resistant properties of the webbing. All harnesses are supplied with stainless steel hardware which provides excellent corrosion resistance.

AFH300704

FEATURES

- Attachment points on Rear D-Ring and Front D-Ring
- Lanyard Keepers
- Endure Guard Webbing provides liquid protection against Oil, Dirt & Water with added abrasion resistance
- Adjustable shoulder, chest and leg straps
- Rescue Loops in shoulder pads

MATERIAL

- Webbing- Endure Coated Polyester webbing
- Metal Component- Stainless Steel



M-L



kgs 1.44 kg



140 kg



EN 361:2002

Used in Industry



3-Point Adjustment



2-Point Attachment



AFH300705

FEATURES

- Attachment points on Rear D-Ring and Front D-Ring
- Lanyard Keepers
- Endure Guard Webbing provides liquid protection against Oil, Dirt & Water with added abrasion resistance
- Padded work positioning belt with side D-Rings
- Rescue loops in shoulder pad
- Adjustable shoulder, chest and leg straps

MATERIAL

- Webbing- Endure Coated Polyester webbing
- Metal Component- Stainless Steel
- Padding- Comfort pad made up of mesh Insushield and Matty



M-L



kgs 1.88 kg



140 kg



EN 361:2002
EN 358:2018

Used in Industry



4-Point Adjustment




3-Point Attachment



KAPTURE™ ELEMENT LV4 || FULL BODY HARNESSES

KStrong HotWorX harnesses have been designed to be used in the most hostile conditions whilst protecting the user. Ideally used in Construction, Heavy Industry or where the users are exposed to flame, heat, molten materials or weld splatter whilst working at heights.

The Aramid webbing has been developed to enhance the heat resistance properties as well as providing improved strength & cut resistant properties, protecting the user in these environments whilst welding.



AFH300701

FEATURES

- Attachment points on Rear D-Ring and Front webbing loops
- Lanyard Keepers
- Webbing with enhanced heat resistance, improved strength and cut resistant properties
- Adjustable shoulder, chest and leg straps

MATERIAL

- Webbing- Para-Aramid Fiber
- Metal Component- Alloy Steel



AFH300702

FEATURES

- Attachment points on Rear D-Ring and Front webbing loops
- Lanyard keepers
- Webbing with enhanced heat resistance, improved strength and cut resistant properties
- Padded work positioning belt with side D-Rings
- Adjustable shoulder, chest and leg straps

MATERIAL

- Webbing- Para-Aramid Fiber
- Metal Component- Alloy Steel



HARNESSES

KAPTURE™ ELEMENT LV4 || FULL BODY HARNESSES

KStrong AtexWorX harnesses have been designed to be used in potentially explosive atmospheres whilst protecting the user. Ideally used in Mining, Petrochemical industries & Confined Space where there is need to prevent any electrostatic discharge igniting the explosive atmosphere.



AFH300703

FEATURES

- Attachment points on Rear D-Ring and Front webbing loops
- Lanyard keepers
- Extension Strap
- Antistatic webbing
- Adjustable shoulder, chest and leg straps

MATERIAL

- Webbing- Anti-Static Polyester
- Metal Component- Stainless Steel



Suspension Trauma Straps

AFZ150100

FEATURES

- Suspension Trauma Straps are designed to avoid the effect of Suspension Trauma.
- Compact and light weight without hampering the activity of the User.
Allows the suspended worker to stand up in their harness to relieve pressure after falling.
- Easy to attach to the Harness and easy to deploy.

Harnesses fitted with Suspension Trauma Strap on request.




kgs 0.06 kg



Steps to Use



Unzip the pouches fitted on both sides of the harness.



Hold the 2 straps together.



connect the straps with each other making a loop with the help of the easy-to-use buckle.



Put your feet into the loop.



Stand onto the loop, so that the thigh straps are free to move.



Adjust the sit strap towards the front to release pressure and give a sitting posture.

Lanyard Keepers

AFZ190176



Retrofit Lanyard Keepers for EPIC & ELEMENT Harnesses

AFZ190177



Retrofit Lanyard Keepers for ELITE Harnesses

LANYARDS



What is a Lanyard?

A Lanyard is the connecting element in a fall protection system between a Harness and an Anchorage Point. They can be used in Fall arrest or Restraint depending on the application and the products selected for the Task.

What is a Fall Arrest Lanyard?

The Fall Arrest Lanyards incorporate a Shock Absorbing element which is designed to arrest a fall whilst limiting the force felt on the body of the worker to less than 6kN.

Understanding an Energy Absorber

By incorporating an Energy Absorber in the lanyard, the forces that are felt on the body of the worker in the event of a fall have been reduced to under 6kN whilst arresting the fall. The Energy Absorber is an essential component of the connecting system and must be included in a complete Fall Arrest System.




Minimum Fall Clearance Distance Required when using an Energy Absorbing Lanyard

Understanding the fall clearance distance when working at a height is critical when using an appropriate Fall Protection System.

When anchored vertically above the head level, the length of the Lanyard used and the elongation of the Energy Absorber which occurs in the event of a fall, become two important factors to determine the fall clearance.

Always check for the minimum Fall clearance distance so that the risk of hitting an obstacle below is eliminated. In the worst case where the user has climbed above the point of anchorage, has a free fall of 4.0mtrs before the Lanyard has been activated, the minimum clearance required is 6.0 meters below the anchorage.

The Fall clearance is the required distance from the anchorage point to the Ground to ensure the user is safe if a fall is to occur.

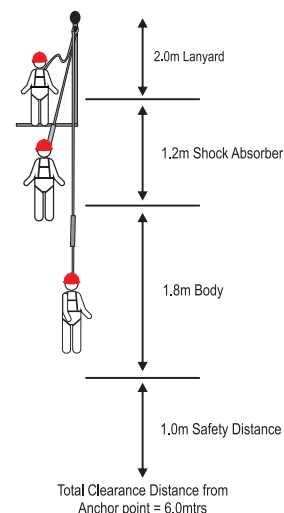

$$\text{Allowed fall arrest distance} = 2L + 1.75$$

(where L = length of lanyard)

There are certain important factors which should be considered while using the lanyard for the purpose of Fall Arrest

- Before using a lanyard, it is mandatory to inspect it for any damages, cuts, and burns.
- The lanyard should never, in any case, be wrapped around any anchor point, and then attached back on itself. In doing so, the lanyard could suffer a “choke-effect”, making it vulnerable to break.
- Never use the lanyard as a means of suspension. It is only a connecting element between the worker and his anchorage.
- Never use two single lanyards to create a forked lanyard, or to increase the length of the lanyard.



Total length of Lanyard
should not exceed 2.0m

What is Restraint Lanyard?

Restraint Lanyards are a part of the Restraint System which have been designed to remove the risk of falls by limiting the User from reaching an exposed edge.

Since there is no fall that occurs in a “Fall Restraint System” the Restraint Lanyards do not have any shock absorption element incorporated in them. It is therefore mandatory to ensure that Fall Restraint Lanyards are never used for the purpose of fall arrest.


What is a Work Positioning Lanyard?

Work Positioning lanyards are designed to hold the user in restraint, so a fall cannot occur, or to hold the user in a position of work where a fall may occur whilst allowing the user to work hands-free.

It is used by connecting the two ends of the Lanyard to the two Lateral D-rings on the work positioning belt of the harness of the user. The Length can be easily adjusted to suit the application.

It is important to note that a Work Positioning System is not Fall Protection Equipment.

It is mandatory to use specific Fall Arrest Lanyards and other such equipment along with Work Positioning Systems to ensure Safety of the worker at a height.

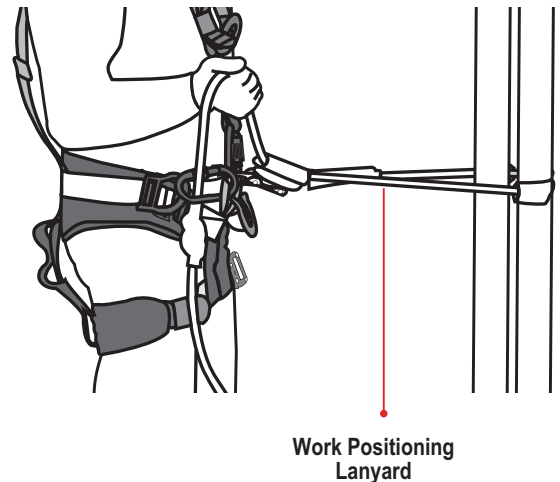

KAPTURE™ | Lanyards

KStrong has developed a range of Lanyards to accommodate the user's requirements ensuring they choose the correct lanyard for the job required.

KStrong Lanyards can be arranged into the following categories:

1. **Shock Absorbing Lanyards** : Shock Absorbing element which is designed to arrest a fall whilst limiting the force felt on the body of the worker to less than 6kN.
2. **Sharp Edge Shock Absorbing Lanyards** : KStrong has developed a range of Sharp edge Kernmantle Rope lanyards to ensure the User is protected when working near sharp edges on Roofs or structures.
3. **Work positioning lanyards** : Work Positioning lanyards are designed to hold the user in restraint, so a fall cannot occur, or to hold the user in a position of work where a fall may occur whilst allowing the user to work hands-free.
4. **Restraint Lanyards** : Restraint Lanyards are a part of the Restraint System which have been designed to remove the risk of falls by limiting the User from reaching an exposed edge.

KAPTURE™ EPIC | Lanyards

KStrong Epic Lanyards have been designed to accommodate a range of applications, ranging from Sharp Edge Rope Lanyards offering extra protection when working near an edge, to the Elasticated Webbing Lanyards allowing the webbing to reduce the overall length when not in use, preventing the user to trip or Snag the lanyard. All Epic Shock Absorbing Lanyards are rated to 140kg.

Used in Industry



EPIC Sharp Edge Shock Absorbing Rope Lanyards

AFL402901A



AFL402911A



AFL402951A



TECHNICAL SNAPSHOT

Product Code	AFL402901A	AFL402911A	AFL402951A
Material	Kernmantle Rope	Kernmantle Rope	Kernmantle Rope
Anchorage Attachment	Aluminum Snap Hook	Aluminum Scaffold Hook	Aluminum Scaffold Hooks
Connecting Attachment	Aluminum Snap Hook	Aluminum Snap Hook	Aluminum Snap Hook
Rope Diameter	11.0 mm	11.0 mm	11.0 mm
Length	1.8 m	1.8 m	1.8 m
Certification	EN 355:2002	EN 355:2002	EN 355:2002 VG11 RfU
Weight	0.87 kg	1.22 kg	2.0 kg

Used in Industry



EPIC Shock Absorbing Elasticated Lanyards

AFL408211A



AFL408251A



AFL408341A



TECHNICAL SNAPSHOT

Product Code	AFL408211A	AFL408251A	AFL408341A
Material	Elasticated Webbing	Elasticated Webbing	Elasticated Webbing
Anchorage Attachment	Aluminium Snap Hook	Aluminum Scaffold Hook	Aluminum Scaffold Hooks
Connecting Attachment	Aluminium Snap Hook	Aluminium Snap Hook	Aluminium Snap Hook
Webbing Width	44.0 mm	44.0 mm	44.0 mm
Expanded Length	1.8 m	1.8 m	1.8 m
Relaxed Length	1.4 m	1.4 m	1.4 m
Certification	EN 355:2002	EN 355:2002	EN 355:2002 VG11 RfU
Weight	0.74 kg	1.08 kg	1.78 kg

Used in Industry



EPIC Shock Absorbing Lanyards

AFL401150A



AFL401160A



AFL406650A



TECHNICAL SNAPSHOT

Product Code	AFL401150A	AFL401160A	AFL406650A
Material	Polyester	Polyester	Polyester
Anchorage Attachment	Aluminium Snap Hook	Aluminum Scaffold Hook	Aluminum Scaffold Hooks
Connecting Attachment	Aluminium Snap Hook	Aluminium Snap Hook	Aluminium Snap Hook
Webbing Width	30.0 mm	30.0 mm	30.0 mm
Length	1.8 m	1.8 m	1.8 m
Certification	EN 355:2002	EN 355:2002	EN 355:2002 VG11 RfU
Weight	0.79	1.11 kg	1.77 kg

Used in Industry



EPIC Work Positioning Lanyard 12mm Kernmantle Rope

Epic Pole Strap

AFL405301A(PR)



AFL405351A(PR)



AFL405211A



TECHNICAL SNAPSHOT

Product Code	AFL405301A(PR)	AFL405351A(PR)	AFL405211A
Material	Kernmantle Rope	Kernmantle Rope	Polyester Webbing
Anchorage Attachment	Aluminium Snap Hook	Aluminum Snap Hook	Aluminum Snap Hook
Connecting Attachment	Aluminum Adjuster & Karabiner	Aluminum Adjuster & Karabiner	Aluminum Snap Hook
Rope Diameter/ Webbing Width	12.0 mm	12.0 mm	44.0mm
Length	2.0 m	2.0 m	2.0 m
Certification	EN 358:2018 & EN 795 Class B	EN 358:2018	EN 358:2018
Weight	0.66 kg	0.75 kg	0.61 kg

KAPTURE™ ELITE | Lanyards

KStrong Elite Lanyard range has been designed to be used in a Fall Arrest System or used when in Restraint. The range accommodates a variety of applications allowing the user to work freely and safe in all environments.

Used in Industry



ELITE Shock Absorbing Lanyards 30mm Webbing

AFL408131



AFL408141



AFL408612



TECHNICAL SNAPSHOT

Product Code	AFL408131	AFL408141	AFL408612
Material	Polyester	Polyester	Polyester
Anchorage Attachment	Steel Snap Hook	Steel Scaffold Hook	Steel Scaffold hook
Connecting Attachment	Steel Snap Hook	Steel Snap Hook	Steel Snap Hook
Webbing Width	30.0 mm	30.0 mm	30.0 mm
Length	1.8 m	1.8 m	1.8 m
Certification	EN 355:2002	EN 355:2002	EN 355:2002 VG11 RfU
Weight	0.94 kg	1.21 kg	1.76 kg

Used in Industry



ELITE Work Positioning Lanyard 14mm Twisted Rope

AFL405101




AFL405111



ELITE Work Positioning Lanyard 30mm Webbing

AFL405201

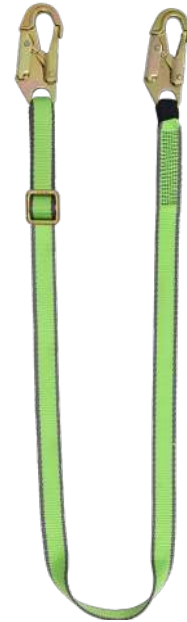

TECHNICAL SNAPSHOT

Product Code	AFL405101	AFL405111	AFL405201
Material	Twisted Rope	Twisted Rope	Polyester Webbing
Anchorage Attachment	Steel Snap Hook	Steel Snap Hook	Steel Snap Hook
Connecting Attachment	Steel Snap Hook	Grip Adjuster & Steel Karabiner	Steel Snap Hook
Rope Diameter/ Webbing Width	14.0 mm	14.0 mm	30.0 mm
Length	2.0 m	2.0 m	2.0 m
Certification	EN 358:2018	EN 358:2018	EN 358:2018
Weight	0.94 kg	1.22 kg	0.77 kg

KStrong Essential Lanyard Range has been designed as an economical range to meet the customer's needs. It is one of the most Versatile, Lightweight connecting elements available in the market today.

Used in Industry



ESSENTIAL Shock Absorbing Lanyards 30mm Webbing

AFL401111



AFL401140



AFL401612



TECHNICAL SNAPSHOT

Product Code	AFL401111	AFL401140	AFL401612
Material	Polyester Webbing	Polyester Webbing	Polyester Webbing
Anchorage Attachment	Steel Screw Locking Karabiner	Steel Scaffold Hook	Steel Scaffold Hooks
Connecting Attachment	Steel Screw Locking Karabiner	Steel Screw Locking Karabiner	Steel Screw Locking Karabiner
Webbing Width	30.0 mm	30.0 mm	30.0 mm
Length	1.8 m	1.8 m	1.8 m
Certification	EN 355:2002	EN 355:2002	EN 355:2002 VG11 RfU
Weight	0.77 kg	1.16 kg	1.82 kg

Used in Industry



ESSENTIAL Shock Absorbing Lanyards 12mm Twisted Rope

ESSENTIAL Restraint Lanyards 30mm Webbing

AFL403111




AFL403611



AFL406301



AFL406341

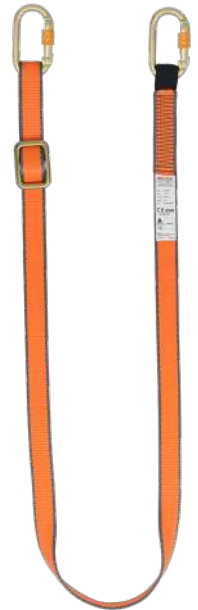

TECHNICAL SNAPSHOT

Product Code	AFL403111	AFL403611	AFL406301	AFL406341
Material	Twisted Rope	Twin Twisted rope	Polyester Webbing	Polyester Webbing
Anchorage Attachment	Steel Scaffold Hook	Steel Scaffold Hooks	Steel Screw Locking Karabiner	Steel Screw Locking Karabiner
Connecting Attachment	Steel Screw Locking Karabiner	Steel Screw Locking Karabiner	Steel Screw Locking Karabiner	Steel Screw Locking Karabiner
Rope Diameter/ Webbing Width	12.0 mm	12.0 mm	30.0 mm	30.0 mm
Length	1.8 m	1.8 m	1.8 m	1.8 m
Certification	EN 355:2002	EN 355:2002 VG11 RfU	EN 354:2010	EN 354:2010
Weight	1.22 kg	1.95 kg	0.538 kg	0.47 kg

Used in Industry



ESSENTIAL Restraint Lanyards 12mm Twisted Rope

AFL406111



AFL406151



AFL406601



TECHNICAL SNAPSHOT

Product Code	AFL406111	AFL406151	AFL406601
Material	Twisted Rope	Twisted Rope	Twisted Rope
Anchorage Attachment	Steel Screw Locking Karabiner	Steel Scaffold Hook	Steel Scaffold Hooks
Connecting Attachment	Steel Screw Locking Karabiner	Steel Screw Locking Karabiner	Steel Screw Locking Karabiner
Rope Diameter	12.0 mm	12.0 mm	12.0 mm
Length	1.8 m	1.8 m	1.8 m
Certification	EN 354:2010	EN 354:2010	EN 354:2010 VG11 RfU
Weight	0.62 kg	0.96 kg	1.75 kg

KAPTURE™ ELEMENT | Lanyards

KStrong HotWorX Lanyards

KStrong HotWorX Lanyards have been designed to be used in the most hostile conditions whilst protecting the user. Ideally used in Construction, Heavy Industry or where the users are exposed to Flame, Heat, molten materials, or sparks whilst at heights.

The Para-Aramid webbing has been developed to enhance the heat resistance properties as well as providing improved strength & cut resistant properties, protecting the user in these environments whilst welding.

Used in Industry



AFL408701



AFL408805



TECHNICAL SNAPSHOT

Product Code	AFL408701	AFL408805
Material	Para-Aramid Fiber	Para-Aramid Fiber
Anchorage Attachment	Steel Snap Hook	Steel Scaffold Hooks
Connecting Attachment	Steel Snap Hook	Steel Snap Hook
Webbing width	44.0 mm	44.0 mm
Length	1.8 m	1.8 m
Certification	EN 355:2002 EN ISO 15025:2002 EN ISO 9150:1988	EN 355:2002 EN ISO 15025:2002 EN ISO 9150:1988 VG11 RFU
Weight	0.88 kg	1.86 kg



KAPTURE™ ELEMENT | Lanyards

KStrong AtexWorX Lanyards

KStrong AtexWorX Lanyards have been designed to be used in potentially explosive atmospheres whilst protecting the user. Ideally used in Mining, Petrochemical industries & Confined Space where there is need to prevent any electrostatic discharge igniting the explosive atmosphere.

Used in Industry



AFL408721



AFL408825



TECHNICAL SNAPSHOT

Product Code	AFL408721	AFL408825
Material	Anti-static Polyester Webbing	Anti-static Polyester Webbing
Anchorage Attachment	Aluminum Scaffold Hook	Aluminum Scaffold Hooks
Connecting Attachment	Aluminum Snap Hook	Aluminum Snap Hook
Webbing width	44.0 mm	44.0 mm
Length	1.8 m	1.8 m
Certification	EN 355:2002 ATEX 2014/34/EU EN ISO 80079-36:2016 EN ISO 80079-37:2016 EN 1149-1:2006 EN 1149-5:2008	EN 355:2002 ATEX 2014/34/EU EN ISO 80079-36:2016 EN ISO 80079-37:2016 EN 1149-1:2006 EN 1149-5:2008 VG11 RfU
Weight	1.11 kg	1.78 kg



KAPTURE™ ELEMENT | Lanyards

KStrong ElectWorX Lanyards

KStrong ElectWorX Lanyards have been designed to be used in conditions where there are possible electrical hazards. Ideally used in Utilities, overhead Line teams on live wires protecting the user from Electrical discharge.

Used in Industry



AFL401765



AFL401865



TECHNICAL SNAPSHOT

Product Code	AFL401765	AFL401865
Material	Polyester Webbing	Polyester Webbing
Anchorage Attachment	Dielectric 14kV Scaffold Hook	Dielectric 14kV Scaffold Hook
Connecting Attachment	Dielectric Snap Hook	Dielectric Snap Hook
Webbing width	30.0 mm	30.0 mm
Length	1.8 m	1.8 m
Certification	EN 355:2002	EN 355:2002 VG11 RfU
Weight	1.39 kg	2.075 kg



KAPTURE™ ELEMENT | Lanyards

KStrong ExtremeWorX Lanyards

KStrong ExtremeWorX Lanyards have been designed to be used in the most hostile conditions whilst protecting the user. Ideally used in Offshore, Petrochemical Industry, Water Treatments plants and Food processing Industries. The Endure guard coating protects the webbing against oil, water, & dirt, as well as enhancing the abrasion resistant properties of the webbing. All lanyards are supplied with aluminum hardware which provides excellent corrosion resistance.

Used in Industry



AFL408741



AFL408845



TECHNICAL SNAPSHOT

Product Code	AFL408741	AFL408845
Material	Endure Coated Polyester webbing	Endure Coated Polyester webbing
Anchorage Attachment	Aluminum Snap Hook	Aluminum Scaffold Hooks
Connecting Attachment	Aluminum Snap Hook	Aluminum Snap Hook
Webbing width	44.0 mm	44.0 mm
Length	1.8 m	1.8 m
Certification	EN 355:2002 EN 354:2010 CNB/P/11.063	EN 355:2002 EN 354:2010 VG11 RfU CNB/P/11.063
Weight	0.8 kg	1.626 kg





RETRACTABLE

**FALL
ARRESTER
BLOCKS**

BRUTE SERIES

KStrong offers a full range of Self-Retracting lifelines & Rescue Retrieval solutions to meet the users requirement ensuring all variety of applications are covered. Whether the user is working in Construction, Utilities, Offshore, Maintenance or General industry and the installation is overhead, at foot-level or personally attached to the harness, Micron™ and BRUTE™ SRLs & Retrievals provide durable performance and reliability.

FEATURES

Pivoting Anchorage Loop

Allows the block to move slightly to minimize friction on the cable if the block is not well aligned.

Selector Pin for Block or Winch mode

Integrated Retrieval Handle

Galvanized Steel Swivel Hook provides corrosion resistance.



High Impact Polymer Casing

Ergonomic carry handle allowing the user to transport the SRL with ease.

Snout for minimizing the accidental Locking consists of Snout which minimizes the accidental locking of the Block when the wire rope is released suddenly.

Impact Indicator allows easy visual inspection to determine if the unit has experienced a fall by a user.


What is a Retractable Fall Arrester Block?

Retractable Fall Arrester Block is a vertical lifeline that is used as part of a complete fall arrest system. The lifeline, much like the seat and shoulder belt in a car, pulls out and retracts easily. Subjected to a quick jerk, however, an internal mechanism acts to engage a braking system. When the tension is released, the lifeline moves freely again. During a fall event, the internal braking system of the Block functions to disperse the energy of the fall over a short distance, thus limiting the force applied to a user's body.

Features of Retractable Blocks

- Can be anchored to a single point and allows the user to move uninhibited at different levels.
- Fall Arrest Block or SRL retracts or extends with the user when moving up or down.
- In the event of a fall the Fall Arrest Block locks immediately whilst reducing the applied force to less than 6kN.

Casing	:	Light Weight Durable Polymer Casing
Lock Mechanism	:	Unique centrifugal Braking Mechanism.
Applications	:	Ideal for Vertical use in various hazardous conditions for personnel weighing upto 140kgs.
Retractable Life Line	:	Available in Stainless Steel wire, Webbing and Galvanized Iron(GI) wire rope.
Harness End Connector	:	Swivel Snap Hook with Load Indicator connector which indicates a warning line when a Fall has occurred.
Conformity	:	Tested and Certified EN 360:2002.

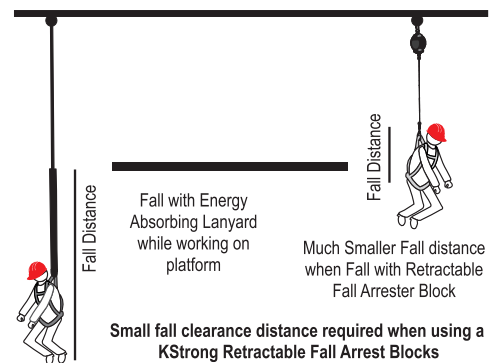

Retractable Blocks are made of high impact strength polymer, to prevent breakage and is nearly indestructible. It can sustain any kind of impact which may be encountered in the toughest of conditions.



Retractable Blocks come with a unique swivel action of the Anchorage Eye. This prevents any undue twist of the user and subsequent injurious impact in the event of a fall.



Retractable Wire Rope Blocks are provided with a 'Holding Snout' made of soft Thermoplastic Elastomer

The Snout minimizes accidental locking of the Block when the wire rope is released suddenly:

The Holding snout provided dampens the impact experienced on the Block casing when the wire rope is released suddenly. This prevents the Block from locking accidentally in such cases, and hence allows for better usage.



Allows a safer and more comfortable grip on the wire rope when the Block is inspected for retraction and locking prior to use.



Carry Handle

KStrong Brute SRLs have been designed with an ergonomic carry handle allowing the user to transport the SRL with ease.

This special handle comes incorporated in the all Polymer casing, GI and Webbing lanyard Blocks of 3.5mtrs - 30mtrs size.



Handle

KStrong Tag Lines

KStrong Tag Lines have been designed to provide a way to retrieve a Self-Retracting Lifeline (SRL) that is out of reach when needed and to retract back into the housing safely without damaging the SRL when not in use.

AFZ830013 (4m)



AFZ830025 (8m)



AFZ830050 (15m)




AFZ830100 (30m)



Pull Down the Lanyard of Block using the Tag Line

- The Retractable Block may lock if the Rope is suddenly released. Always use the Tag line.
- Always allow the retractable lanyard to recoil into the Block casing under control using the same Tag line.

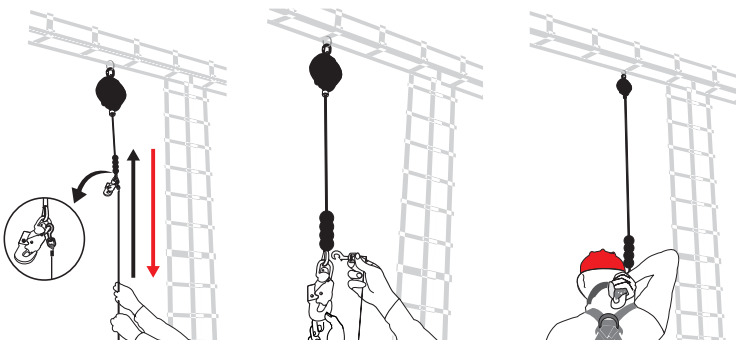

Brute Sealed Blocks

Brute range of Sealed Blocks are designed specifically for the most extreme environments. The heavy duty sealed design, corrosion resistant material used in the Block ensures the critical working components are kept free of dirt, grease, water and chemicals.

Ideally suited for Oil and Gas, Sewage Plants and all Offshore areas.

- 4.5mm Diameter Retractable Stainless Steel Wire Rope provides corrosion resistance.
- Quick Lifeline Assembly- The only non-sealed portion of the block can easily be changed on site by a competent person. The wire rope can be changed quickly and easily with minimum tools.
- Sealed Design (meets IP69K as per ISO-20653) All critical parts of the block are sealed from contamination thereby increasing its reliability in harsh conditions.
- Vibration Test IEC 60068-2-6:2007

AFS570030



Pivoting Anchorage Loop Allows the block to move slightly to minimize friction on the cable if the block is not well aligned.

Stainless Steel Cover for maximum durability in harsh environments.

Snout for minimizing the accidental Locking consists of Snout which minimizes the accidental locking of the Block when the wire rope is released suddenly.

Impact Indicator allows easy visual inspection to determine if the unit has experienced a fall by a user.

Stainless Steel Swivel Hook provides corrosion resistance.

Ergonomic carry handle allowing the user to transport the SRL with ease.



140 kg

Included with



Wire Rope Length 30m


TECHNICAL SNAPSHOT



Product Code	AFS570030
Material of Casing	Polymer & Stainless Steel Casing
Material and Dia of Lifeline	Stainless steel wire rope Ø4.5mm
Breaking Strength	15kN
Attachment End	Stainless steel ANSI swivel snap hook
Anchorage End	Stainless steel ANSI quarter turn locking Karabiner
Certification	EN360:2002 & AS/NZS 1891.3 2020 IP69K as per ISO-20653 & IEC 60068-2-6:2007, ATEX 2014/34/EU
Weight	20.293 kg ± 0.10 kg


Brute Sealed Blocks

AFS570010



Wire Rope Length 10m

AFS570020



Wire Rope Length 20m

Used in Industry



II 2G

ATEX 2014/34/EU

Included with all SRL's above 3.5m



TECHNICAL SNAPSHOT

Product Code	AFS570010	AFS570020
Material of Casing	Polymer & Stainless Steel Casing	Polymer & Stainless Steel Casing
Material and Dia of Lifeline	Stainless steel wire rope Ø4.5mm	Stainless steel wire rope Ø4.5mm
Breaking Strength	15kN	15kN
Attachment End	Stainless steel ANSI swivel snap hook	Stainless steel ANSI swivel snap hook
Anchorage End	Stainless steel ANSI quarter turn locking Karabiner	Stainless steel ANSI quarter turn locking Karabiner
Certification	EN360:2002 & AS/NZS 1891.3 2020 IP69K as per ISO-20653 & IEC 60068-2-6:2007, ATEX 2014/34/EU	EN360:2002 & AS/NZS 1891.3 2020 IP69K as per ISO-20653 & IEC 60068-2-6:2007, ATEX 2014/34/EU
Weight	7.498 kg ± 0.10 kg	11.953 kg ± 0.10 kg

RETRACTABLE FALL ARRESTER BLOCKS


Brute Sealed 3 Way Retrievals

KStrong Sealed Rescue Retrieval SRLs have been specially designed to use both as standard SRL and a Rescue Retrieval Type 3 SRL. These Blocks can be activated into winch mode, raising or lowering a user to safety. They can be easily mounted on the KStrong Extreme Davits and Tripods.

Used in Industry




AFS570020R



140 kg

Wire Rope Length 20m

AFS570030R



140 kg

Wire Rope Length 30m



AFT710007UR

Suitable for Tripod & Davits.




AFT7500B30

Suitable for Stainless Steel Davit AFT7500 only.




AFT7500B20

Block Mode

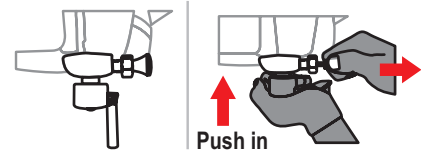

Pull the pin and push the Handle to reverse in Block mode

Winch Mode

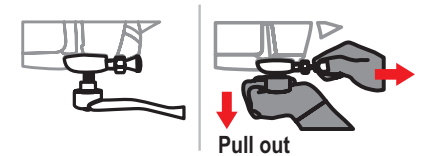

Pull the pin and handle to shift to Winch Mode

Included with all SRL's above 3.5m



TECHNICAL SNAPSHOT

Product Code	AFS570020R	AFS570030R
Material of Casing	Polymer & Stainless Steel Casing	Polymer & Stainless Steel Casing
Material and Dia of Lifeline	Stainless steel wire rope Ø4.5mm	Stainless steel wire rope Ø4.5mm
Breaking Strength	15kN	15kN
Attachment End	Stainless steel ANSI swivel snap hook	Stainless steel ANSI swivel snap hook
Anchorage End	Stainless steel ANSI quarter turn locking Karabiner	Stainless steel ANSI quarter turn locking Karabiner
Certification	EN360:2002 & AS/NZS 1891.3 2020 IP69K as per ISO-20653 & IEC 60068-2-6:2007, ATEX 2014/34/EU	EN360:2002 & AS/NZS 1891.3 2020 IP69K as per ISO-20653 & IEC 60068-2-6:2007, ATEX 2014/34/EU
Weight	13.263 kg ± 0.10 kg	19.423 kg ± 0.10 kg

RETRACTABLE FALL ARRESTER BLOCKS

Brute SRLs

The Brute Range of SRL's are Light weight, Compact and Robust allowing the user Reliability and Safety when working at height. Available in Galvanised Steel, Stainless Steel and High Performance Webbing.

Used in Industry




Brute SRLs (Wire Rope)

AFS510003.5



140 kg




Wire Rope Length 3.5m

AFS510006



140 kg



Wire Rope Length 6.0m

Ex II 2G
ATEX 2014/34/EU

Included with all SRL's above 3.5m



TECHNICAL SNAPSHOT

Product Code	AFS510003.5	AFS510006
Material of Casing	High Impact polymer Casing	High Impact polymer Casing
Material and Dia of Lifeline	Galvanized steel wire rope Ø4.5mm	Galvanized steel wire rope Ø4.5mm
Breaking Strength	15kN	15kN
Attachment End	Galvanized ANSI swivel steel snap hook	Galvanized ANSI swivel steel snap hook
Anchorage End	Galvanized ANSI steel quarter turn locking Karabiner	Galvanized ANSI steel quarter turn locking Karabiner
Certification	EN 360:2002 & ATEX 2014/34/EU, AS/NZS 1891.3 2020	EN 360:2002 & ATEX 2014/34/EU, AS/NZS 1891.3 2020
Weight	2.98 kg ± 0.10 kg	3.14 kg ± 0.10 kg


RETRACTABLE FALL ARRESTER BLOCKS

Brute SRLs (Wire Rope)

Used in Industry




AFS510010




Wire Rope Length 10m

AFS510015



Wire Rope Length 15m

AFS510020



Wire Rope Length 20m



Included with all SRL's above 3.5m



TECHNICAL SNAPSHOT

Product Code	AFS510010	AFS510015	AFS510020
Material of Casing	High Impact polymer Casing	High Impact polymer Casing	High Impact polymer Casing
Material and Dia of Lifeline	Galvanized steel wire rope Ø4.5mm	Galvanized steel wire rope Ø4.5mm	Galvanized steel wire rope Ø4.5mm
Breaking Strength	15kN	15kN	15kN
Attachment End	Galvanized ANSI swivel steel snap hook	Galvanized ANSI swivel steel snap hook	Galvanized ANSI swivel steel snap hook
Anchorage End	Galvanized ANSI steel screw gate Karabiner	Galvanized ANSI steel screw gate Karabiner	Galvanized ANSI steel screw gate Karabiner
Certification	EN 360:2002 & ATEX 2014/34/ EU, AS/NZS 1891.3 2020	EN 360:2002 & ATEX 2014/34/ EU, AS/NZS 1891.3 2020	EN 360:2002 & ATEX 2014/34/ EU, AS/NZS 1891.3 2020
Weight	4.42 kg ± 0.10 kg	5.65 kg ± 0.10 kg	6.19 kg ± 0.10 kg


RETRACTABLE FALL ARRESTER BLOCKS

Brute SRLs (Wire Rope)

Used in Industry




AFS510025



Wire Rope Length 25m

AFS510030



Wire Rope Length 30m



Included with all SRL's above 3.5m



TECHNICAL SNAPSHOT

Product Code	AFS510025	AFS510030
Material of Casing	High Impact polymer Casing	High Impact polymer Casing
Material and Dia of Lifeline	Galvanized steel wire rope Ø4.5mm	Galvanized steel wire rope Ø4.5mm
Breaking Strength	15kN	15kN
Attachment End	Galvanized ANSI swivel steel snap hook	Galvanized ANSI swivel steel snap hook
Anchorage End	Galvanized ANSI steel screw gate Karabiner	Galvanized ANSI steel screw gate Karabiner
Certification	EN 360:2002 & ATEX 2014/34/EU, AS/NZS 1891.3 2020	EN 360:2002 & ATEX 2014/34/EU, AS/NZS 1891.3 2020
Weight	12.72 kg ± 0.10 kg	14.36 kg ± 0.10 kg


RETRACTABLE FALL ARRESTER BLOCKS

Brute SRLs (Webbing)

Used in Industry




AFS550003.5




Webbing Length 3.5m

AFS550006



Webbing Length 6.0m

AFS550012



Webbing Length 12m

Included with all SRL's above 3.5m



TECHNICAL SNAPSHOT

Product Code	AFS550003.5	AFS550006	AFS550012
Material of Casing	High Impact polymer Casing	High Impact polymer Casing	High Impact polymer Casing
Material and Dia of Lifeline	Polyester webbing 25mm	Polyester webbing 25mm	Polyester webbing 25mm
Breaking Strength	20kN	20kN	20kN
Attachment End	Galvanized ANSI swivel steel snap hook	Galvanized ANSI swivel steel snap hook	Galvanized ANSI swivel steel snap hook
Anchorage End	Galvanized ANSI steel screw gate Karabiner	Galvanized ANSI steel screw gate Karabiner	Galvanized ANSI steel screw gate Karabiner
Certification	EN 360:2002, AS/NZS 1891.3 2020	EN 360:2002, AS/NZS 1891.3 2020	EN 360:2002, AS/NZS 1891.3 2020
Weight	2.41 kg ± 0.10 kg	2.45 kg ± 0.10 kg	6.36 kg ± 0.10 kg

RETRACTABLE FALL ARRESTER BLOCKS

Brute Sharp Edge


The Brute Sharp Edge SRLs have been specifically engineered for Horizontal Use and Sharp Edge applications ensuring the users ultimate Safety when working near an edge.

Used in Industry




Brute SRLs Sharp Edge (Wire Rope)

AFS510003.5SE




Wire Rope Length 3.5m

AFS510006SE



Wire Rope Length 6.0m

AFS510010SE



Wire Rope Length 10m

Included with all SRL's above 3.5m



TECHNICAL SNAPSHOT

Product Code	AFS510003.5SE	AFS510006SE	AFS510010SE
Material of Casing	High Impact polymer Casing	High Impact polymer Casing	High Impact polymer Casing
Material and Dia of Lifeline	Galvanized steel wire rope Ø4.8mm	Galvanized steel wire rope Ø4.8mm	Galvanized steel wire rope Ø4.8mm
Breaking Strength	15kN	15kN	15kN
Attachment End	Galvanized ANSI swivel steel snap hook	Galvanized ANSI swivel steel snap hook	Galvanized ANSI swivel steel snap hook
Anchorage End	Galvanized ANSI steel screw gate Karabiner	Galvanized ANSI steel screw gate Karabiner	Galvanized ANSI steel screw gate Karabiner
Certification	EN 360:2002, VG11 RfU 11.060 & AS/NZS 1891.3 2020	EN 360:2002, VG11 RfU 11.060 & AS/NZS 1891.3 2020	EN 360:2002, VG11 RfU 11.060 & AS/NZS 1891.3 2020
Weight	2.34 kg ± 0.02 kg	3.34 kg ± 0.10 kg	4.62 kg ± 0.10 kg

RETRACTABLE FALL ARRESTER BLOCKS

Brute Sharp Edge

Used in Industry




Brute SRLs Sharp Edge (Wire Rope)

AFS510015SE



140 kg




Wire Rope Length 15m

AFS510020SE



140 kg



Wire Rope Length 20m

Included with all SRL's above 3.5m



TECHNICAL SNAPSHOT

Product Code	AFS510015SE	AFS510020SE
Material of Casing	High Impact polymer Casing	High Impact polymer Casing
Material and Dia of Lifeline	Galvanized steel wire rope Ø4.8mm	Galvanized steel wire rope Ø4.8mm
Breaking Strength	15kN	15kN
Attachment End	Galvanized ANSI swivel steel snap hook	Galvanized ANSI swivel steel snap hook
Anchorage End	Galvanized ANSI steel screw gate Karabiner	Galvanized ANSI steel screw gate Karabiner
Certification	EN 360:2002, VG11 RfU 11.060 & AS/NZS 1891.3 2020	EN 360:2002, VG11 RfU 11.060 & AS/NZS 1891.3 2020
Weight	6.0 kg ± 0.10 kg	6.40 kg ± 0.10 kg

RETRACTABLE FALL ARRESTER BLOCKS

Brute SRLs Sharp Edge (Webbing)

Used in Industry



AFS550003.5SE



Webbing Length 3.5m

AFS550006SE



Webbing Length 6.0m

Included with all SRL's above 3.5m



TECHNICAL SNAPSHOT

Product Code	AFS550003.5SE	AFS550006SE
Material of Casing	High Impact polymer Casing	High Impact polymer Casing
Material and Dia of Lifeline	Polyester Webbing 25mm	Polyester Webbing 25mm
Breaking Strength	20kN	20kN
Attachment End	Galvanized ANSI swivel steel snap hook	Galvanized ANSI swivel steel snap hook
Anchorage End	Galvanized ANSI steel screw gate Karabiner	Galvanized ANSI steel screw gate Karabiner
Certification	EN 360:2002, VG11 RfU 11.060 & AS/NZS 1891.3 2020	EN 360:2002, VG11 RfU 11.060 & AS/NZS 1891.3 2020
Weight	2.04 kg ± 0.10 kg	2.65 kg ± 0.10 kg

RETRACTABLE FALL ARRESTER BLOCKS


Brute Retrievals

KStrong Rescue Retrieval SRLs have been specially designed to use both as standard SRL and a Rescue Retrieval Type 3 SRL. These Blocks can be activated into winch mode, raising or lowering a user to safety. They can be easily mounted on the KStrong Extreme Davits and Tripods.

Used in Industry




Block Mode

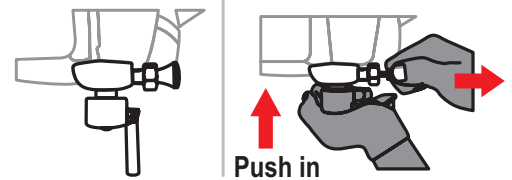

Pull the pin and push the Handle to reverse in Block mode

Winch Mode

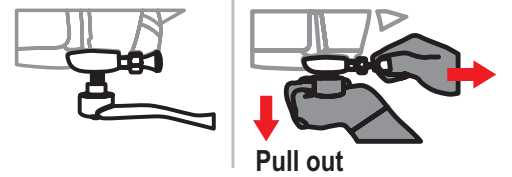

Pull the pin and handle to shift to Winch Mode

Included with



TECHNICAL SNAPSHOT

Product Code	AFS510020R	AFS510030R
Material of Casing	High Impact polymer Casing	High Impact polymer Casing
Material and Dia of Lifeline	Galvanized steel wire rope Ø4.5mm	Galvanized steel wire rope Ø4.5mm
Breaking Strength	15kN	15kN
Attachment End	Galvanized ANSI swivel steel snap hook	Galvanized ANSI swivel steel snap hook
Anchorage End	Galvanized ANSI steel screw gate Karabiner	Galvanized ANSI steel screw gate Karabiner
Certification	EN 360:2002 & EN 1496:2006 Class B & ATEX 2014/34/EU, AS/NZS 1891.3 2020	EN 360:2002 & EN 1496:2006 Class B & ATEX 2014/34/EU, AS/NZS 1891.3 2020
Weight	8.24 kg ± 0.10 kg	14.76 kg ± 0.10 kg

RETRACTABLE FALL ARRESTER BLOCKS

MICRON™ SRL SERIES

The KStrong Micron has been designed to be used where there is low clearance or lack of overhead structures. The ability to use the Micron for Horizontal and Sharp Edge applications makes it the most versatile lanyard on the Market. It is light weight, stays out of the way and can be easily used as a lanyard replacement. Whether your application requires a single Micron to connect at foot level (Fall Factor 2) or twin leg configurations for an overhead anchor, KStrong Miron reduces the Fall distance as compared to Energy Absorbing Lanyards.

Used in Industry



MICRON AFS550002

Swivel Anchorage Eye

High strength Polymer casing provides maximum durability

Automatic Quick Fall Arrester to arrest fall to less than 4kN and fall arrest distance to less than 600mm

Has inbuilt Textile Energy Absorber with protective cover on it

Aluminum Swivel Hook



Can be used as a Single and Twin Forked Lanyard with SRL Connector



AFC609100


Consists of detailed Dos and Don'ts instructions inside the cover

2m Retractable Webbing provides continuous fall protection without any obstacles- keeps lifeline out of worker's way, reducing snagging, fraying and trip falls

Benefits of Micron when using at Foot level (Fall Factor 2)

In a Fall Factor 2 condition, the user anchors the lanyard below his foot level. The impact on the user is highest in this situation. Kstrong Micron has been designed to significantly reduce the impact forces applied to user whilst decreasing the risk of serious injuries when used a foot level.

Can also be used when Anchor Point is the foot level which means Micron complies to Fall factor 2

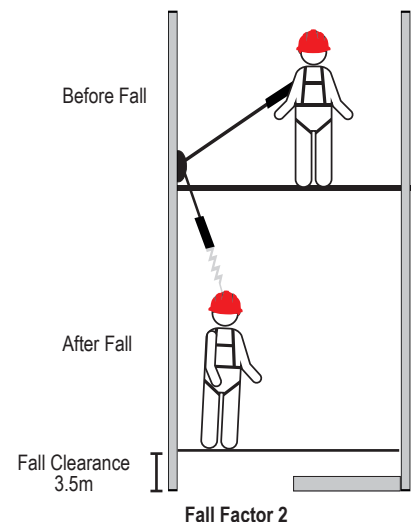

RETRACTABLE FALL ARRESTER BLOCKS

AFS550002



Webbing Length 2m

AFS550028



Webbing Length 2m

AFS550028D



Webbing Length 2m



TECHNICAL SNAPSHOT

Product Code	AFS550002	AFS550028	AFS550028D
Material of Casing	High Strength Polymer	High Strength Polymer	High Strength Polymer
Material	Dyneema Webbing 21mm	Dyneema Webbing 21mm	Dyneema Webbing 21mm
Breaking Strength	15 kN	15 kN	23 kN
Attachment End	ANSI Aluminum Hook	ANSI Aluminum Hook	Connector
Anchorage End	ANSI Aluminum screw gate karabiner	Aluminum scaffold hook with ANSI steel gate	Aluminum scaffold hook with ANSI steel gate
Certification	EN 360:2002, VG 11 CNB/11.060 EN 355:2002 (Shock Absorber) & ATEX 2014/34/EU	EN 360:2002, VG 11 RfU#11.060 & ATEX 2014/34/EU, AS/NZS 1891.3 2020	EN 360:2002, VG 11 RfU#11.060 & ATEX 2014/34/EU
Weight	862.5 gm ± 20.0 gm	1.34 kg ± 0.05 kg	2.95 kg ± 0.02 kg

How to use Micron as a Single or Twin Lanyard with Twin SRL Connector



Insert one Micron Block in the karabiner and insert the karabiner in the webbing loop at the Dorsal.



Insert the separator in the karabiner.



Now insert the second Micron Block.



Move the karabiner to be placed in the centre.

KStrong offers a unique Twin SRL Connector to use Micron as both Single and Forked Lanyards.

AFC609100



KG 235.0 gm ± 10.0 gm

AFC609101



KG 149.0 gm ± 10.0 gm

* NOTE: Twin MICRON can also be attached to Harness using AFC609101 Pin Connector.

RETRACTABLE FALL ARRESTER BLOCKS

MICRON AFS55002LD

The MICRON LE has been designed with an integrated shock absorber allowing the User to operate at Foot level and Sharp Edge applications, providing confidence when working near an edge. It is light weight, robust and comfortable and with the quick SRL connector can be easily attached to a range of Harnesses.

Used in Industry



FEATURES

- Ultralight compact design for ease of use with integrated Shock Absorber.
- Used at Foot level.
- Twin SRL connector for connection to the Dorsal attachment of harness.
- Meets the Sharp Edge Test and Passes the Dynamic Test of Fall Factor 2.
- Twin legged retractable lanyard with Aluminum Snap hooks at termination end and Interrated Shock Pack at harness attachment end.
- Compatible to be used where anchor point not available above users head / can be used near a potential leading edge.
- Can be used Horizontally.

**COMING
SOON**



Webbing Length 2m

TECHNICAL SNAPSHOT


Product Code	AFS55002LD
Material of Casing	High Strength Polymer
Material and Webbing Width	Dyneema Webbing 21 mm
Breaking Strength	15 kN
Attachment End	Twin SRL Connector
Anchorage End	Aluminum Swivel Scaffold Hook with ANSI steel gate
Certification	EN 360:2002, EN 355 Dynamic Requirement
Weight	2.41 Kg

Mini Block (Swivel)

Used in Industry




AFS551002(SW)

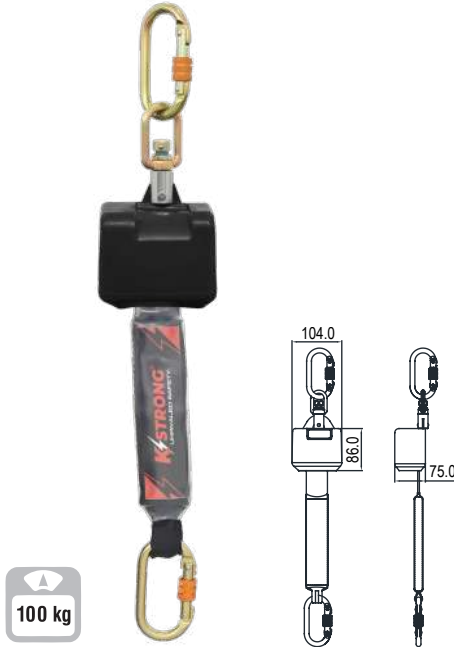

Webbing Length 2.5m

TECHNICAL SNAPSHOT

Product Code	AFS551002(SW)
Material of Casing	Protective Casing
Material and Webbing Width	Polyester 47mm
Breaking Strength	15kN
Attachment End	Steel Screw Locking Karabiner
Anchorage End	Steel Screw Locking Karabiner
Certification	EN 360:2002
Weight	1.35 kg

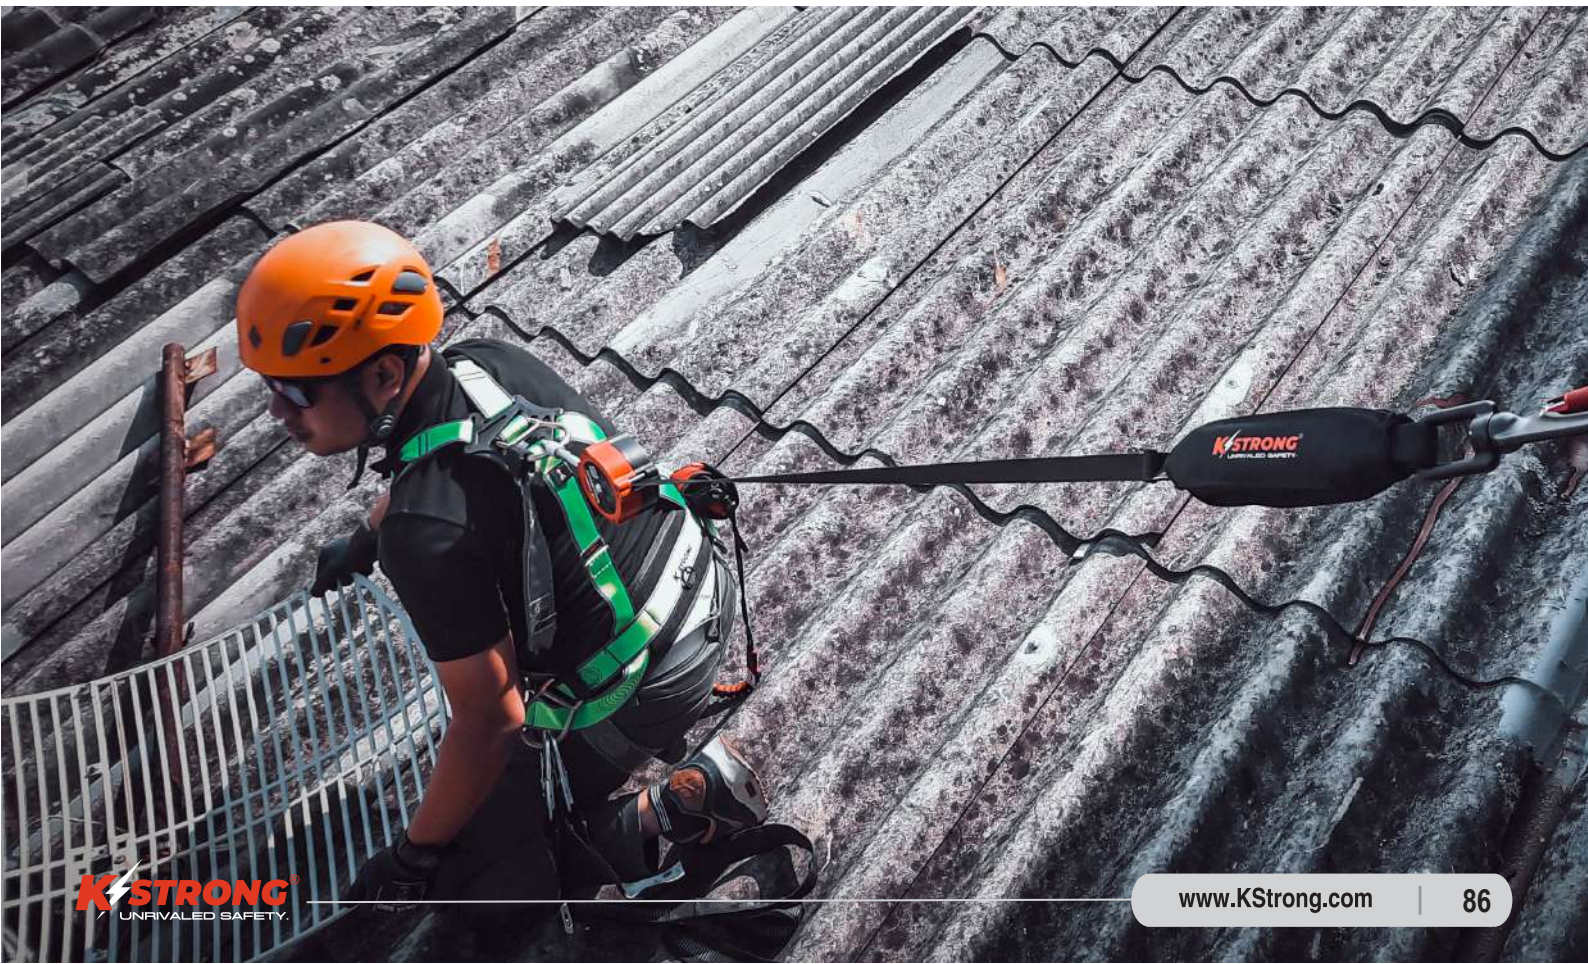

TEMPORARY

ANCHORAGE LINE



↑
UP
HAUT
ALTO
AUF


BLOCKER



KStrong range of Temporary Anchorage Lines are engineered to be easily installed and removed for use on short-term jobs. They provide a safe and efficient temporary line allowing the users ease of movement whilst reducing the risks at height.

What is a Temporary Anchorage Line?

Temporary Anchorage Lines are engineered for a specific work situation to be easily installed and removed. They are installed horizontally or vertically between two anchors, allowing a personal protection system to be attached.

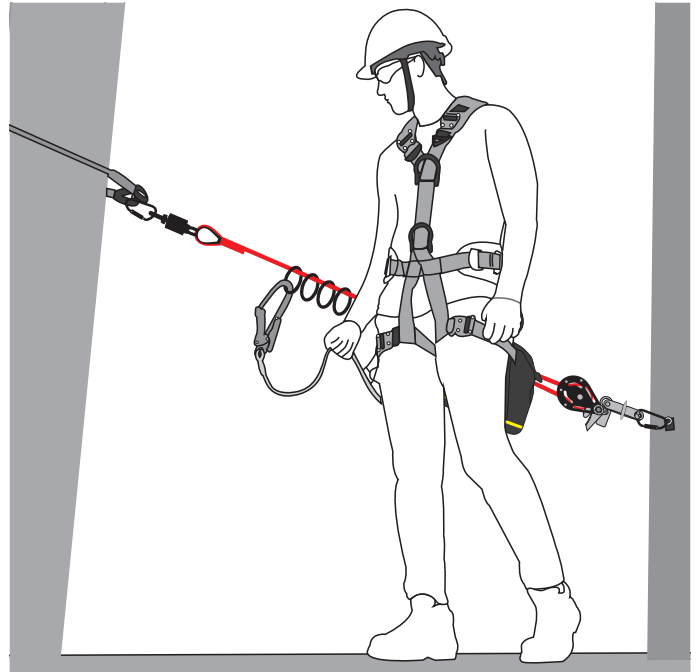

Horizon Temporary Horizontal Webbing Anchorage Line

KStrong introduces a range of Temporary Horizontal Lifelines, made of textile webbing and rope which are extremely easy to carry and install wherever required. These Anchorage Lifeline systems provide a suitable and safe anchorage horizontally along the entire length.

Used in Industry




AFA940001

- Consists of Ratchet Tensioner that allows easy tensioning of the lifeline between two structures.
- Has 2 Cross Arm Straps each to tie off to the structure where the anchorage is required.
- The complete system is supplied in a bag, which is permanently attached to the assembly and also enables the user to easily carry the system with the help of comfortable shoulder hanging straps provided in the bag.
- Once the lifeline is fitted, the user can easily connect the lanyard attached to his harness with the lifeline using a Karabiner. This allows movement along the length while keeping the user secured and safe at all times.



Kgs 4.12 kg ± 0.05 kg

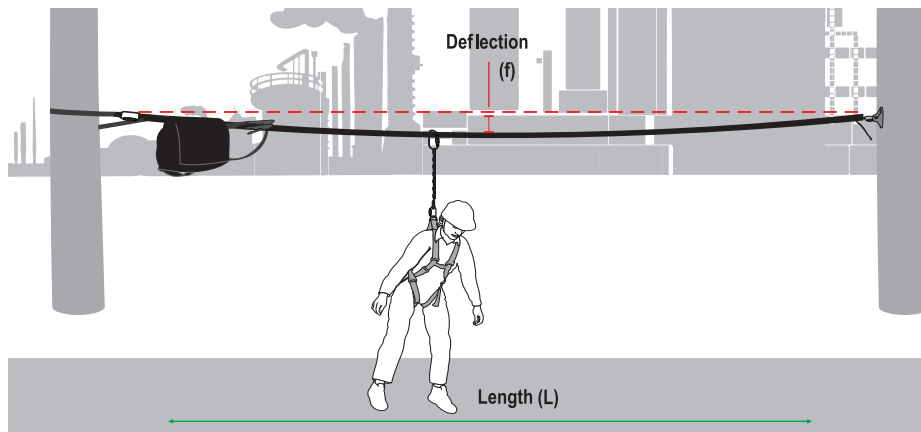

TECHNICAL SNAPSHOT

Product Code	Webbing Material	Attachment Ends	Max. No. of Users	Max. Span Length	Certified to
AFA940001	Polyester webbing of 30.0 mm	Both ends - Stitched loops with Twist Lock Karabiner's	upto 2 users	upto 20.0 mtrs	EN 795:2012 TS 16415:2013 Type B and C (for upto 2 users)

Horizon 4 Man Temporary Horizontal Rope Anchorage Line

KStrong introduces the 4 man Temporary Horizontal Life line, which is easy to use and install. It provides a suitable and safe anchorage horizontally along the entire length. Suitable for up to 4 users.

Used in Industry



AFA940010

Kgs 9.28 kg ± 0.01 kg



- Quick and easy to install, and is reusable.
- Has 4 Steel O-Rings to enable the user to easily attach the Lanyard of his Harness to the Lifeline using a Connector.
- Has unique tension indicator for creating an adequate tension in the line. Once the required tension is achieved, the disc on the tension indicator rotates freely, indicating the line is ready to use.
- Has Swivel Connector- specially designed to prevent any twisting of the rope.
- Minimum breaking strength: 25kN
- The whole system is supplied in a bag, which is permanently attached to the assembly and also enables the user to easily carry the system with the help of comfortable handles provided in the bag. This bag is designed in such a way that it keeps the unused rope safely, thereby preventing the rope being subjected to abrasion or any damage caused from dust, dirt grime, oil etc. Once fitted, you can easily put back the extra rope not deployed along the length, into the bag.



AFA920115(1.0M)

TECHNICAL SNAPSHOT

Product Code	Material of Rope	Breaking Strength	O-Rings Specifications	Max. Span Length	Conforms to
AFA940010	Kernmantle Rope of dia 16.0 mm	One end- Swivel brass connector with Twist Lock Karabiners Other end- Tension indicator with Twist Lock Karabiners	Forged Galvanized Steel O-Rings Qty- 4	upto 25.0 mtrs	EN 795:2012 Type C & TS 16415:2013 Type C (for upto 4 users)

Horizon 2 Man Temporary Horizontal Rope Anchorage Line

KStrong 2 man Temporary Horizontal Lifeline is another lifeline that is quick and easy to install. This Lifeline is suitable for up to 2 users.

Used in Industry



AFA940012



8.26 kg ± 0.01 kg



- AFA940012 has 2 steel O-rings to enable the user to easily attach the lanyard of his Harness to the lifeline using a Karabiner.
- Has unique tension indicator in which once the required tension is achieved, the disc on the tension indicator gets released, indicating the line is ready to use.
- Minimum breaking strength: 25kN.
- The whole system is supplied in a bag, which is permanently attached to the assembly. Enables the user to easily carry the system with the help of comfortable handles provided in the bag. This bag is designed in such a way that it keeps the unused rope safely, there by preventing the Rope from being subjected to abrasion or any damage caused from dust, dirt grime, oil etc.
- Once fitted, you can easily put back the extra rope not deployed along the length, into the bag.



AFA920115(1.0M)

TECHNICAL SNAPSHOT

Product Code	Material of Rope	Breaking Strength	O-Rings Specifications	Conforms to
AFA940012	Kernmantle Rope of dia 16.0 mm	One end- Swivel brass connector with Twist Lock Karabiners Other end- Tension indicator with Twist Lock Karabiners	Forged Galvanized Steel O-Rings Qty- 2	EN 795:2012 Type C TS 16415:2013 Type C (for upto 2 users)

Handy Line Temporary Horizontal Lifeline

KStrong Wrangler Temporary Horizontal Lifeline has been designed to be easily installed in a horizontal plane allowing the user to have access to a suitable anchorage whilst working over large distances. This Lifeline is suitable for up to 2 users.

Used in Industry



AFA940014

Kgs 13.42 kg ± 0.01 kg



- Housing made of durable and high strength polymer.
- Handy and portable design.
- Extremely easy to install; retractable lifeline is simply pulled out for installation up to the required length and retracted back with the built-in winch into an easy-to-carry case.
- Inbuilt Winch for easy retraction of rope back into the housing/case for fast, simple and safe dismantle. Hence, eliminating large and bulky coils of cable that are difficult to set-up and store.
- Has inbuilt shock absorption mechanism to limit the impact forces during fall arrest.
- Molded and padded handle for easy carriage.
- Comes with Hook at the termination end for easy connection.
- Can be used by maximum 2 users simultaneously.
- Has tension indicator to indicate required tension in the line.
- Impact Indicator on the hook turns red in the case of a fall.



TECHNICAL SNAPSHOT

Product Code	Material of Rope	Breaking Strength	Max. Span Length of Wire Rope	Conforms to
AFA940014	7x19 Galvanized Steel Wire Rope of dia 6.0mm	22 kN	Upto 18.0 mtrs	EN 795:2012 Type C TS 16415:2013 Type C (for upto 2 users)

What is the T-Line?

THE T-LINE IS A TWIN LIFELINE SYSTEM.

T-Line is an innovative system, combining a lifeline, fall arrest and evacuation system in one providing a complete fall protection system when working at heights.

T-Line's unique design means it can be used where traditional fall protection devices cannot. T-Line consists of a single unit housing with two separate lifelines on separate spools that work independently of each other. Similar to an inertia reel, the lifelines are self-retracting and automatically lock at the onset of a fall.

The T-Line system has been designed to allow a person to move horizontally and vertically whilst removing the pendulum effect if a fall occurs. Due to the unique triangulation of the cables, it prevents the pendulum movements and reduces the fall arrest distance, allowing installation in areas with little clearance available.

Suitable for long spans up to 24m end to end, with no intermediate supports. This feature overcomes many engineering issues that are associated with more traditional single line systems by bypassing obstacles such as poles and pipes with ease, giving workers maximum freedom of movement.

T-Line is supplied in 2 variants:

- 2-in-1 - Lifeline and Fall Arrest system
- 3-in-1 - Lifeline and Fall Arrest system equipped with an integrated recovery system

In a fall situation, the two cables equalise to arrest the fall. This eliminates the pendulum swing and slide experienced with traditional systems. The T-Line system cables can be configured to bypass pipework or structures in a roof or reconfigured so the integrated rescue system can be adapted to a davit on a platform for rescue or confined space entry.

General Features:

- Unparalleled Freedom of Movement: Enjoy complete hands-free freedom to move both horizontally and vertically, spanning multiple levels from ground up.
- Obstacle Bypass Capability: Stay connected to the T-Line while effortlessly manoeuvring around overhead obstructions like pipelines, steelworks, and gantry cranes.
- Access in Challenging Areas: T-Line provides safe access where other systems fall short, making it ideal for working in areas with limited clearance, such as scaffolds etc.
- Minimal Fall Arrest Distance: With an extremely low fall arrest distance, the T-Line ensures protection even in confined spaces like flatbed trucks.
- Easy and Efficient Installation: The 12 m system can be quickly installed by the user without any tensioning or adjustments. For the 24 m system, a trained installer is recommended.
- Flexible Installation Options: Mount each end at different heights to accommodate sloping roofs, beams, and various structures, with the main housing unit positioned lower than the secondary pulley.
- Versatile Application: Its robust build and minimalist design make the T-Line suitable for both permanent installations and portable usage, providing a quick and easy temporary solution.

Applications

The T-Line Safety System is ideal for a multitude of applications and industries including:

- Truck and bus workshop bays
- Rail maintenance bays
- Heavy machinery maintenance
- Tanker wash bays, repair and access
- Truck wash and truck loading
- Aviation
- Agriculture
- Construction and Manufacturing
- Telecommunications
- Conveyor belt safety
- Platforms and walkways
- Billboards
- Confined Space


T-Line with Rescue Retrieval

Used in Industry




AFA945012RSS

AFA945024RSS

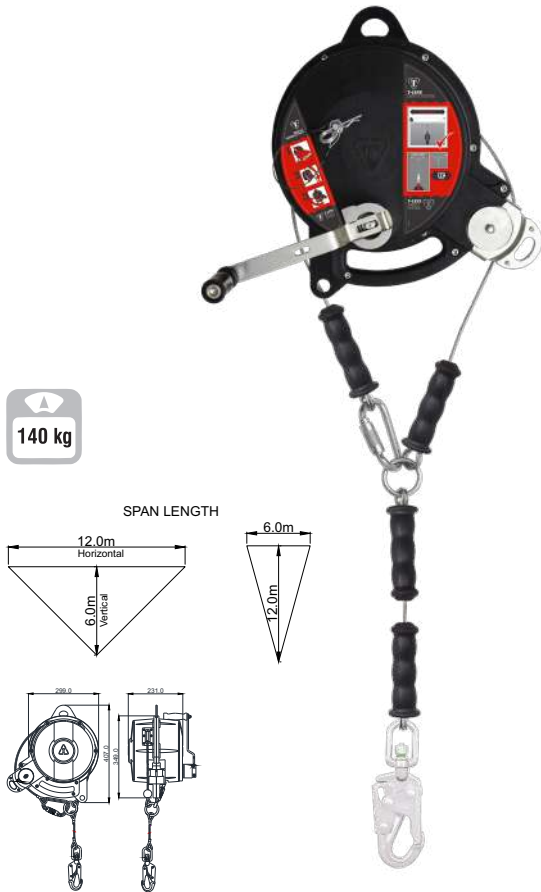

T-LINE 12M Span Length, SS Wire Rope

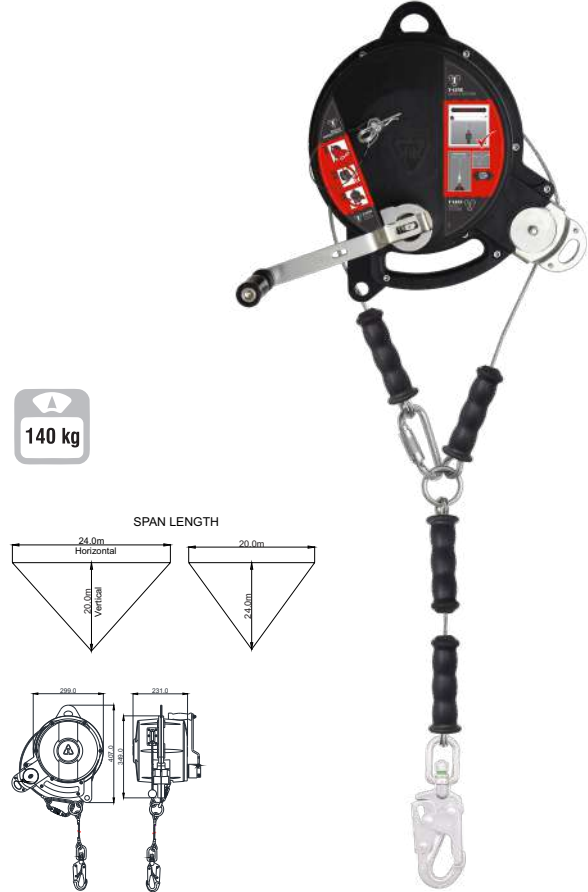

T-LINE 24M Span Length, SS Wire Rope

TECHNICAL SNAPSHOT

Product Code	AFA945012RSS	AFA945024RSS
Material of Casing	Durable and High Strength Polymer	Durable and High Strength Polymer
Wire Cable	316 Stainless Steel 4.8mm Wire	316 Stainless Steel 4.8mm Wire
Karabiner & O-Ring	316 Stainless Steel, MBS 23kn	316 Stainless Steel, MBS 23kn
Minimum Breaking Strength	15kN	15kN
Span Lengths	Horizontal - 6.0 Meters. Vertical - 12.0 Meters. Vertical - 6.0 Meters. Horizontal - 12.0 Meters	Horizontal - 20.0 Meters. Vertical - 24.0 Meters. Vertical - 24.0 Meters. Horizontal - 20.0 Meters
Certification	EN 795:2012 TYPE C & EN 1496:2017 Class B.	EN 795:2012 TYPE C & EN 1496:2017 Class B.
Weight	20.10kg± 0.50 kg	21.5kg± 0.50 kg

TEMPORARY ANCHORAGE LINE


Brute T-Line (without Retrieval)

Used in Industry




AFA945012SS

AFA945024SS

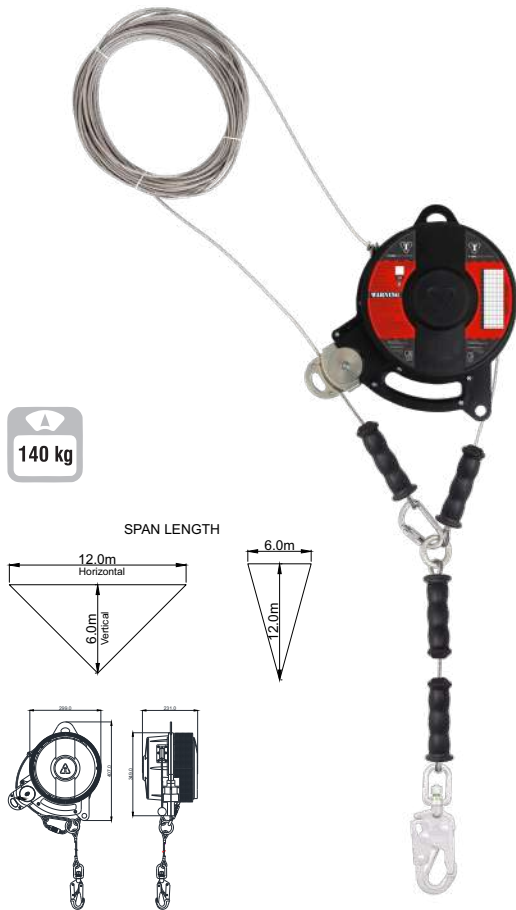

T-LINE 12M Span Length,
SS Wire Rope

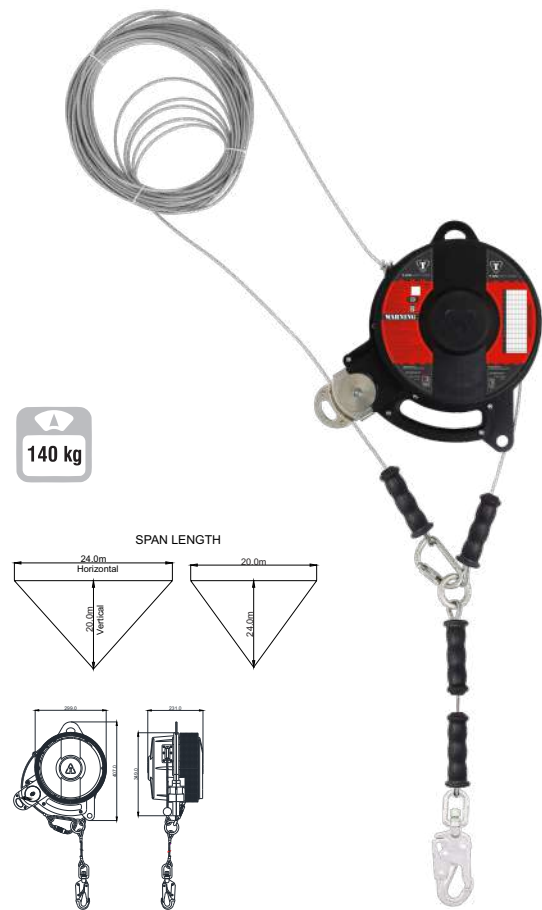

T-LINE 12M Span Length,
SS Wire Rope

TECHNICAL SNAPSHOT

Product Code	AFA945012SS	AFA945024SS
Material of Casing	Durable and High Strength Polymer	Durable and High Strength Polymer
Wire Cable	316 Stainless Steel 4.8mm Wire	316 Stainless Steel 4.8mm Wire
Karabiner & O-Ring	316 Stainless Steel, MBS 23kn	316 Stainless Steel, MBS 23kn
Minimum Breaking Strength	15kN	15kN
Span Lengths	Horizontal - 6.0 Meters. Vertical - 12.0 Meters. Vertical - 6.0 Meters. Horizontal - 12.0 Meters	Horizontal - 20.0 Meters. Vertical - 24.0 Meters. Vertical - 24.0 Meters. Horizontal - 20.0 Meters
Certification	EN 795:2012 TYPE C & EN 1496:2017 Class B.	EN 795:2012 TYPE C & EN 1496:2017 Class B.
Weight	18.13kg± 0.50 kg	19.53kg± 0.50 kg

Additional Components for T-Line

T-Line Safety System is available as a 12 m or 24 m system and is supplied with all necessary components. Anchor point hardware is sold separately.

The T-Line range of anchors are specifically designed to simplify and minimise installation time and prevent the T-Line from swinging.

T-LINE BEAM CLAMP is adjustable to suit most beam sizes. Adjustable using standard tools, the Beam Clamp also incorporates a bi-directional anchor that can be altered to suit the install.

ANCHOR CLEVIS is designed to be bolted or welded to the structure and placed in the perfect orientation for the install.

AFA945017



Anchor Clevis

AFA945026




T-LINE Beam Clamp

TECHNICAL SNAPSHOT


Product Code	AFA945017	AFA945026
Material of Casing	Alloy Steel	Alloy Steel
Design	ANCHORAGE CLAVIS Is used to Anchor the T-Line on metal structures by using compatible fasteners (U-bolt and nut)	Anchor to be installed on flange of beams. Comes with a adjustable jaws for installation to varying flange widths from 125mm - 225mm
Finish	ED coated black	ED coated black
Certification	EN795:2012 Type A & AS/NZS 5532:2013	EN795:2012 Type B & AS/NZS 5532:2013
Weight	18.13kg± 0.50 kg	4.35 kgs ± 0.050 kgs.

T-Line Spans

The AFA945012SS & AFA945012RSS T-Lines can be installed at spans and vertical reach between the limits as set out below.

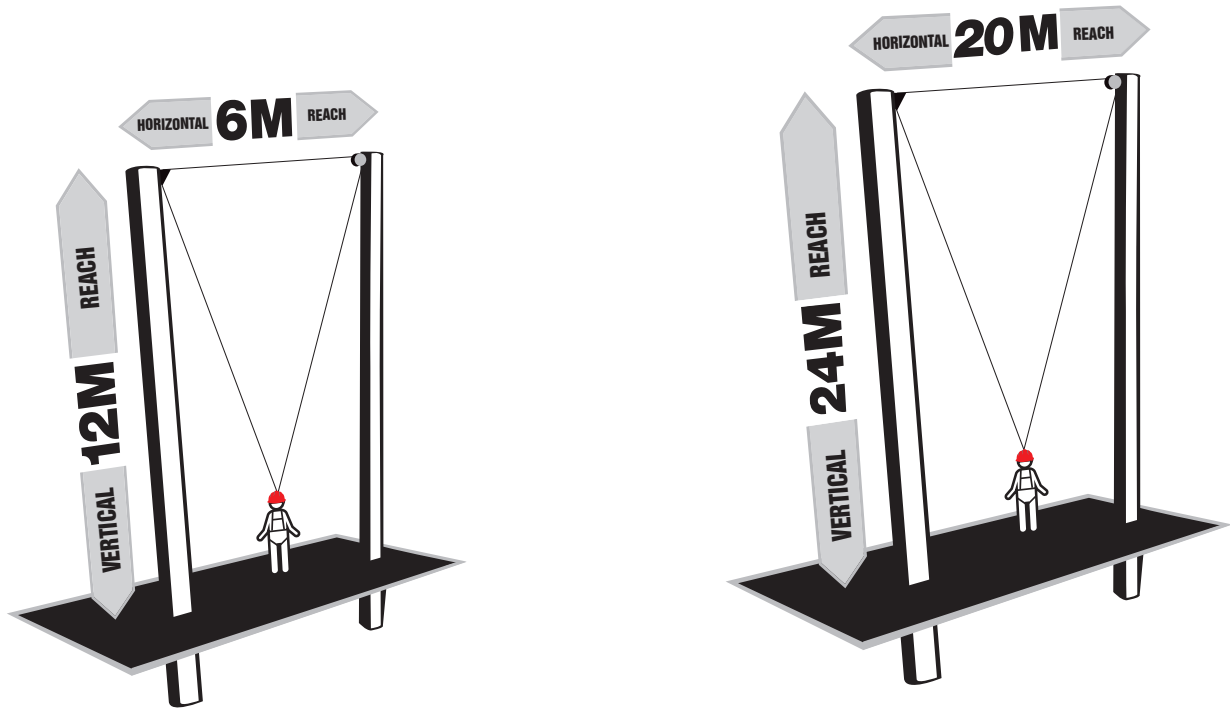

The AFA945024SS & AFA945024RSS T-Lines can be installed at spans and vertical reach between the limits as set out below.

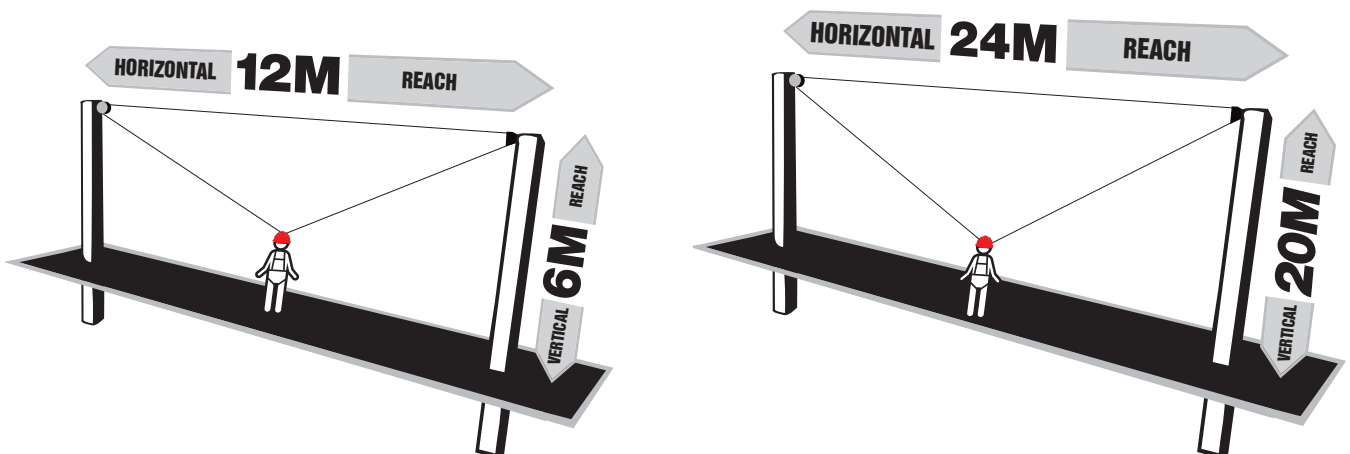

Temporary Vertical Anchorage Line Systems

KStrong introduces Temporary Vertical Anchorage Line Systems which are quick and easy to install. All these systems have uniquely designed Rope Grabs that grab onto the Anchorage Line on which they move, thus arresting the fall immediately.

Used in Industry



Guided Type Fall Arrester System On Flexible Anchorage Line

AFA950001



AFA950201



AFA950202



AFA951201



TECHNICAL SNAPSHOT

Product Code	AFA950001	AFA950201	AFA950202	AFA951201
Rope Grab	Galvanized Steel Openable Rope Grab for fibre rope.	Open-able Rope Grab with permanently stitched Shock absorber	Open-able Rope Grab with Permanently stitched with spacing strap.	Galvanized Steel Non Openable Rope Grab permanently stitched with Shock Absorber
Attachment Element	Steel Screw Locking Karabiner	Steel Screw Locking Karabiner	Steel Snap Hook	Steel Screw Locking Karabiner
Weight	3.48 kg ± 0.05 kg	3.815 kg ± 0.05 kg	3.71 kg ± 0.05 kg	3.49 kg ± 0.05 kg
Anchorage Line	Polyamide Twisted rope of dia 14.0 mm	Polyamide Twisted rope of dia 14.0 mm	Polyamide Twisted rope of dia 14.0 mm	Kernmantle Rope of dia 12.0 mm
Breaking Strength	15 kN	15 kN	15 kN	15 kN
Certification	EN 353-2:2002	EN 353-2:2002	EN 353-2:2002	EN 353-2:2002

Rope Grabs

Removable Rope Grabs can be fitted to the rope at any point allowing hands free ascending or descending.

Suitable for work positioning, rope access back-up device and vertical lifelines
 Variety of Rope grabs to suit Kernmantle ropes between 10.5mm and 12mm, Twisted Rope between 14mm - 16mm and 8mm Stainless Steel Rope.

Used in Industry



AFG801001



AFG801010



AFG801013



*Anti Panic Feature Incorporated in AFG801013

AFG801010: Internal Dia = 25.0 mm (0.984")

AFG801013: Internal Dia = 50.0 mm (1.968")

TECHNICAL SNAPSHOT

Product Code	AFG801001	AFG801010	AFG801013
Material	Alloy Steel	Alloy Steel	Alloy Steel
Breaking Strength	15 kN	15 kN	15 kN
Finish	Silver or Golden Yellow Galvanized	Silver or Golden Yellow Galvanized	Silver or Golden Yellow Galvanized
Weight	873.0 gms ± 10.0 gms	515.0 gms ± 10.0 gms	515.0 gms ± 10.0 gms
Suits Rope	14mm -16mm Twisted Rope	14mm - 16mm Twisted Rope and 12mm Kernmantle Rope	14mm - 16mm Twisted Rope and 12mm Kernmantle Rope
Certification	EN 353-2:2002	EN 353-2:2002	EN 353-2:2002

Rope Grabs

Aluminum & Stainless

Used in Industry



AFG801011



AFG801015



AFG801002



TECHNICAL SNAPSHOT

Product Code	AFG801011	AFG801015	AFG801002
Material	Aluminium Alloy	High Strength Aluminum Alloy	Stainless Steel
Breaking Strength	15 kN	15 kN	15 kN
Finish	Natural Silver / Colored Anodized	Natural Silver / Colored Anodized	Shot blasted & Electro polished
Weight	181.0 gms ± 10.0 gms	183.0 gms ± 10.0 gms	473.0 gms ± 10.0 gms
Suits Rope	11mm Kernmantle Rope	10.5mm - 12mm Kernmantle Rope	8mm Stainless Steel Wire Rope
Certification	EN 353-2:2002 & EN 358:2018	EN 353-2:2002 & EN 358:2018	EN353-1:2014, A1:2017 EN 358:2018

TEMPORARY ANCHORAGE LINE

Textile Ropes For Anchorage Lines

KStrong offers Textile Anchorage Lines in both polyamide and polyester, made of Twisted Rope and Kernmantle Ropes, available in different lengths to suit application. These Anchorage Lines are certified as a system only when used with specific KStrong Rope Grab Fall Arresters.

Used in Industry



**Kernmantle Rope Anchorage 12mm line /m
AFA952012(XX)**



**Twisted rope Anchorage 14mm lines / m
AFA953014(XX)**



TECHNICAL SNAPSHOT

Product Code	Rope Specifications	Rope Diameter	Weight	Certification
AFA952012(XX)	Kernmantle Semi Static Rope	12.0 mm	0.098 kg ± 0.1 kg (1.0m)	EN 891
AFA953014(XX)	Twisted Rope Anchorage line	14.0 mm	0.124 kg ± 0.1 kg (1.0m)	EN 353-2



ANCHORAGES



Defining an Anchor Point


An Anchor Point is one component of a personal fall arrest system, ensuring the user is connected whilst working safely at height.

Points to consider when attaching to an Anchor point


Always make sure that the Anchor point used is strong enough to hold a user when subjected to a fall. The minimum rating of the Single Anchor point should be 12kN.

The user should always attach to the anchor which is located above or at shoulder level as a minimum. If the Anchorage point is below this, then the distance of the fall greatly increases putting the user at risk.

What is Fall Factor? = $\frac{\text{It is the max length of a fall which the person can suffer}}{\text{Length of the Lanyard}}$

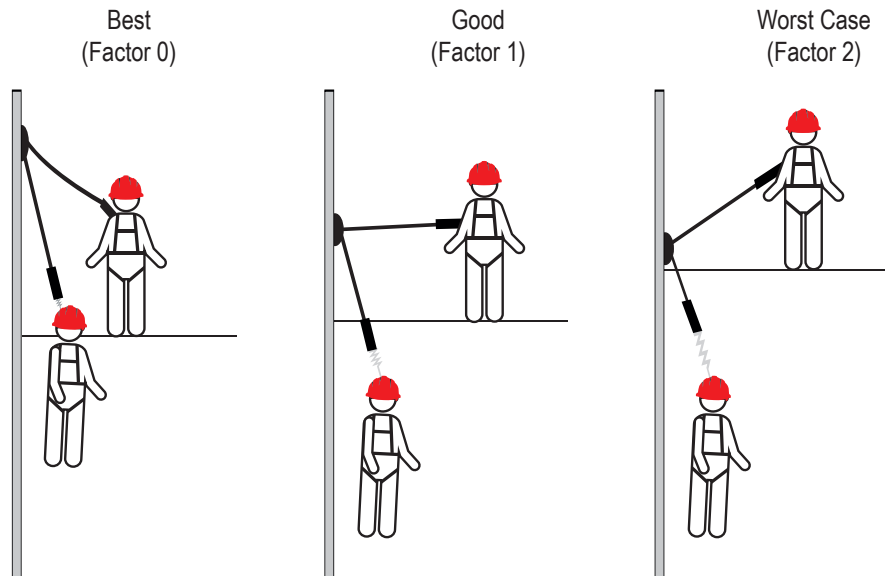

If a fall occurs and the anchor point is not located directly above the user, it may result in a Pendulum swing causing the user to hit an obstacle.

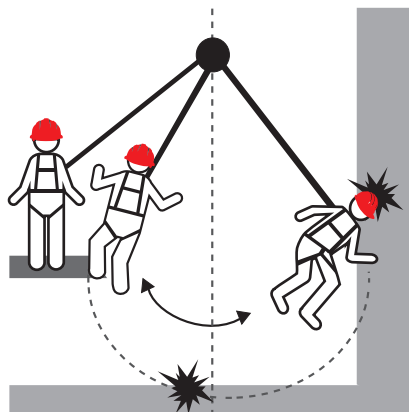


You could be injured if anchored on the side due to the pendulum effect.

According to EN 795:2012, Anchor devices have been classified into various types, Type A, B, C, D and E. KStrong offers a range of Anchor devices which fall under various such types.


Type A Anchor (As Per EN 795:2012)

Type A is an Anchor device with one or more stationary anchor points having the need for a structural anchor or fixing element to fix to the structure. This type of anchor is usually small, and may or may not be removed from the supporting structure due to being fixed, such as with rivets, studs, Bolts, screws or resin bonding.




Type B Anchor (As Per EN 795:2012)

This type is an Anchor device with one or more stationary Anchor points, not having the need for a fixing element to fix to the structure. They are designed to be easily transported, as they normally require minimal installation or can be dismantled and moved quickly.

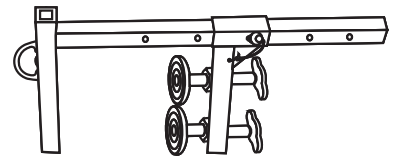


Selecting the Correct Anchor


1- If unsure of the load rating of the anchor point, consult with an engineer. Anchorages must be strong. The best anchorages are i-beams, specially rigging lifelines and other solid fixtures. Never anchor to cable hangers, light fixtures or anything else that is not designed to take a sudden, heavy load. Be sure the anchor point meets certain strength requirements.




2- Make sure your anchor point has been approved by your employer or engineer.



3- Before you hook up to any anchorages, check it for damage.



4- Always attach to an anchor point directly overhead to prevent the pendulum effect.




5- Be sure that you anchor yourself correctly.



6- No two people should use the same anchor point for fall arrest unless it is certified to TS16415-2013.



7- Anchor should be at least 6m above ground level/ clearance area.




Strength Requirement for Anchorages

Purpose of Anchorages	Minimum Ultimate Strength in Direction of Loading (Kilo Newtons)
Free fall-arrest-One person	12 kN
Free fall-arrest-Two persons attached to same anchor.	21 kN
Limited free fall-arrest (Including rope access anchorages)	12 kN
Restraint technique	12 kN
Horizontal life lines	12 kN for 1 person, add 1 kN for each additional person (for example 13 for 2 users,14 for 3 users,15 for 4 users etc.)
End Anchorages (See manufactures recommendations)	Twice the anticipated load on the end anchor
Intermediate anchorages - Deviation less than 15°	12 kN

Anchor Points Information

- Ensure the anchor points on a building or structure used by the operator are certified by an engineer, unless it is clear to a height safety supervisor the anchorage system is structurally sound and also signage with anchor information shall be provided.
- Use table provided to ensure the anchorage is capable of sustaining the ultimate load for one person to use when loaded in the direction of the lanyard, anchorage line, or restraint line during fall arrest.
- For two people utilizing one anchor point the load requirement for the anchorage must be a minimum of 21kN and no more than two people shall use a single anchor at any time.
- Be aware of free fall situation using anchorages. This applies to a free fall-arrest where fall situation >600mm and for limited free fall where fall situation is <600mm and you should not climb above an anchor point.
- Always be aware of your surroundings when working at heights. Check for obstacles above and below you work area.
- If an Anchor point looks damaged, tag out or remove from service until its been inspected by a competent person.
- If in doubt about anchorages check with the manufacture and/or refer to EN 795:2012

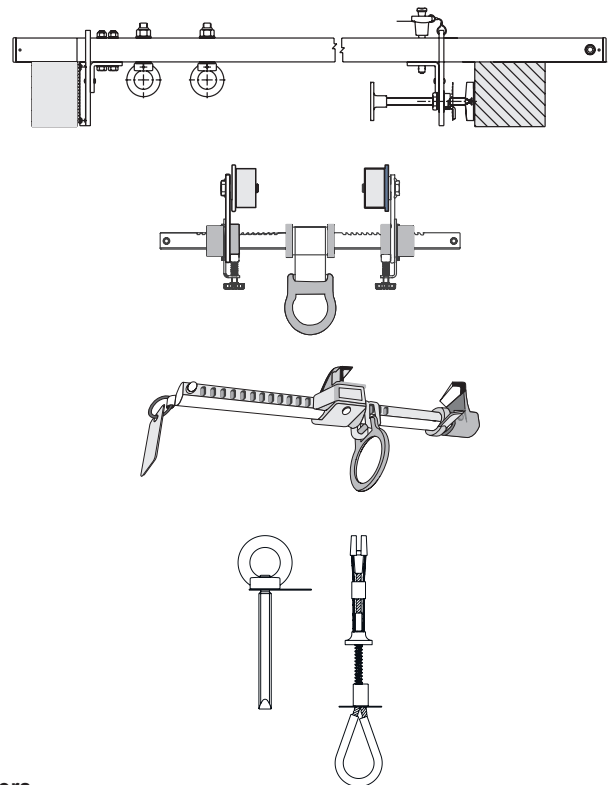

Only authorized personnel can install and certify roofing anchors.

Edge Anchors


Door Anchor | AFA930950

Used in Industry



FEATURES

- The New KStrong Door Anchor provides a non-intrusive anchor point and can be easily installed inside the interior of a building or window opening enabling the most difficult jobs to get done safely and with confidence.
- The Door Anchor can be installed by just compressing it against the door or window frame, jamming itself between the two vertical sides.
- It is made of a highly corrosion resistant Aluminium Alloy.
- The Arms of the Door Anchor are adjustable, enabling installation on door / window frames of width from 60.0 cm to 125.0 cm.
- Fast and easy Installation with built in adjustment knob hence no tools or drilling is required.
- Extremely portable design for easy transport, storage and usage.
- Provided with two separate eye bolts enabling anchorage by two personnel at the same time.
- Certified for 2 users.

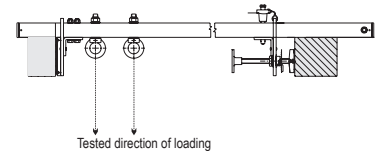

Kgs 4.85 kg ± 0.01 kg

Material: Aluminium Alloy

Minimum Breaking Strength: 15 kN

Conforms: EN 795:2012 Type B, TS 16415:2013 Type B (for up to 2 users)

Beam Anchor | AFA930401




Kgs 1.87 kg ± 0.01 kg

Beam Anchor (Mini) | AFA930411



Kgs 1.56 kg ± 0.01 kg

Flange width adjustable from 75mm to 150mm



Tested direction of loading

FEATURES

- It is a temporary transportable Anchor device, and provides an Anchorage Point while being attached safely onto a beam, without penetrating it.
- The Beam Anchor arm has flanges made of brass, and is adjustable to suit different beam sizes.
- Once installed, the D-ring on the aluminum bar of the Beam Anchor can be used for connection with a variety of connectors for suitable Anchorage.

Material: Aluminium Alloy & Brass

Minimum Breaking Strength: 23 kN

Conforms: EN 795:2012 Type B, ANSI Z359.18-2017 Type A



Beam Trolley Anchor | AFA930412

Used in Industry



FEATURES

- Provides a movable Anchorage Point using the length of the beam to which it is mounted, to move along with the user.
- Highly corrosion resistant and easy to install.
- Comes with adjustable flanges for use on different beam sizes.
- This trolley allows continuous safe Anchorage by allowing the Anchor Point to travel across the length of the beam, along with the user.
- The wheels of the trolley provide extremely smooth movement over the beam, over which it is mounted.

Material: Aluminum Alloy and Stainless steel

Minimum Breaking Strength: 23 kN


Flange Width: 80.0 mm to 250.0 mm

Certified To: EN 795:2012 Type B

Conforms to: ANSI Z359.18-2017 Type A



3.9 kg ± 0.01 kg



Tested direction of loading

Vertical Beam Anchor | AFA930413

Used in Industry



FEATURES

- Designed to clamp vertically to create a fixed anchor point.
- Extremely rugged, compact in size and its lightweight design makes the beam clamp convenient and a reliable anchoring point.
- Easily installed without the use of any tools or fasteners.
- Easily fitted and removed using the adjustment nut and locking pin.
- Beam anchor is connected with a swivel D-Ring, which allows 360° rotation.
- Has flanges made of stainless steel which are adjustable to suit different beam sizes.

Material: Aluminum Alloy & Alloy Steel

Minimum Breaking Strength: 23kN

Flange Width: 90mm to 340mm



Certified to: EN 795:2012 Type B



2.62kgs ± 0.02kgs



Flange width adjustable from
90mm to 340mm



Parapet Anchor | AFA930101

Used in Industry



FEATURES


- KStrong Parapet Anchor provides a safe anchorage point on Parapets and facades for use on various structures.
- A regular Screw-bolt anchor cannot be used in such places because it may damage the base structure, KStrong Parapet Anchor preserves the look of the parapet and facade, while providing a safe anchorage point.
- The soft part on the inner side of the flanges also ensures that the Parapet is not damaged.
- Has adjustable Flanges which makes the device versatile for use on various structures having a width ranging from 60mm to 360mm.
- Ensure the swing of the user is less than 30 degrees while working in a suspended condition.

Material: Alloy Steel with ED coated black

Minimum Breaking Strength: 23 kN

Flange Width: 60.0 mm to 360.0 mm

Conforms: EN 795:2012 Type B, ANSI Z359.18-2017 Type A



Kgs 9.0 kg \pm 0.01 kg



Edge Fix Anchor Post | AFA930901

Used in Industry



FEATURES

KStrong offers a portable and extremely easy to install Anchor Post for installation of Horizontal Line on steel construction I-Beam section.

- Span lengths are adjustable with the help of intermediates.
- The post comes with a unique tilted design to allow unobstructed movement of the user during the construction of roofs or metal structure.
- Can be used by maximum 4 users simultaneously.
- Compatible with beam having flange width of 150.0mm to 220.0mm.
- Comes with universal extremity plate AFF113710 for making connections.

Material: ED coated high strength Alloy Steel

Minimum Breaking Strength: 15 kN

Conforms: EN 795:2012 Type B, TS 16415:2013 Type B

Kgs 12.80 kg



Container Anchor Post with Swivel Eye | AFA930602

FEATURES

- Container Anchor post is meant to provide a temporary anchor for working on top of 20ft and 40ft shipping containers.
- In addition to use as a stand-alone anchor post, Container Anchor Post can also be used to form a Horizontal Lifeline over the top of container depending upon the requirement of work to be done.
- Comes with a side lock and tag line arrangement for easy and secure installation by one person only.
- Consists of side handle with special grip for easy carrying and safe transportation.
- Can be easily removed without damaging the container.
- Consists of one swivel eye for anchorage / making connections.

Material: Alloy Steel with ED coated black

Minimum Breaking Strength: 15 kN

Conforms to: EN 795:2012 Type B & TS 16415:2013 Type B

Kgs 14.53 kg 

Used in Industry



Removable Concrete Anchor | AFA930301

FEATURES

- KStrong introduces an anchorage point which is extremely easy to install using a single hand.
- Designed in a way that it can be removed from the structure, without damaging the structure or anchor, thus allowing reuse.
- Can be installed through a pre-defined hole of diameter 18-19mm through a drilling depth of 110mm.
- The flanges are pulled in when the eye of the anchor is pulled allowing the anchor to pass through the hole. When the eye is released, these flanges fan out along the outer part of the concrete wall, and hold the anchor in its place.


Material: Clamping Jaws- Stainless Steel

Anchor Loop- Polyurethane


Galvanized Wire Rope of dia 6.0mm

Minimum Breaking Strength: 23 kN

Conforms to: EN 795:2012 Type B & AS/NZS 5532:2013

Kgs 150.0 gm \pm 10 gm 

Used in Industry

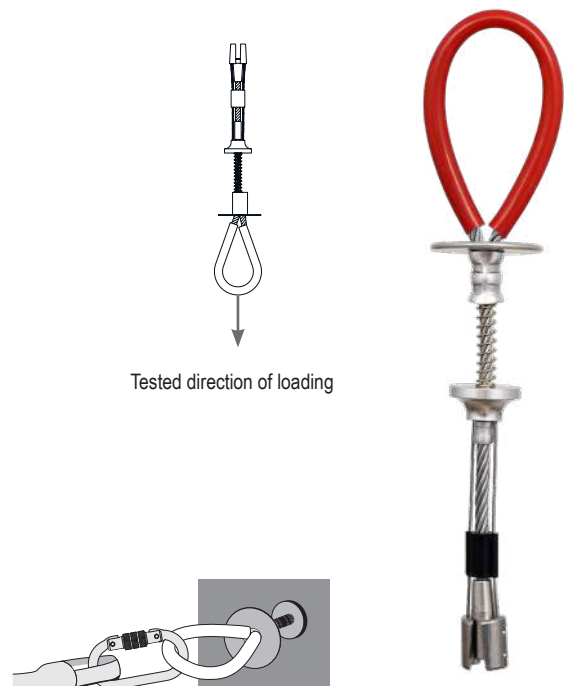


Tested direction of loading

Used in Industry



Single Point Anchor AFA930001SS

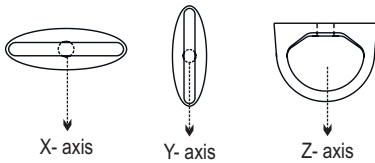


SS Flange Anchor AFA930502 (M12)



AFA930501 (M10)



SS Flange Anchor AFA930530

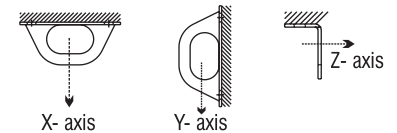

TECHNICAL SNAPSHOT

Product Code	AFA930001SS	AFA930501 & AFA930502	AFA930503
Material	Stainless Steel	Stainless Steel	Stainless Steel
Application	Forged Single point Anchor designed to be fixed on walls, ceiling, roof-tops, and steel structures.	Can be used with chemical as well as in mechanical nut bolt fastener in predefined hole of dia 14mm and 12 mm through a drilling depth of 95mm.	The Anchorage provided by its eye-bolt that has been tested to withstand the required load of 23kN from all the 3 axes, providing the highest level of safety.
Breaking Strength	23kN	15kN	23kN
Finish	Polished	Electro Polished	Electro Polished
Process	Stamped	Stamped	Stamped
Certification	EN 795:2012 Type A, TS 16415:2013 Type A and ANSI Z359.18-2017 Type A AS/NZS 5532:2013	EN 795:2012 Type A and ANSI Z359.18-2017 AS/NZS 5532:2013	EN 795:2012 Type A and ANSI Z 359.18-2017 Type A.
Weight	380.0 gms ± 10.0 gms	60.0 gms ± 10.0 gms (Weight of both)	311.0 gms ± 10.0 gms

Used in Industry



Anchor Bolt
AFA930316

Concrete Anchor
AFA930316C

**Removable Concrete Anchor |
C/W Sleeve**
AFA930310



Chemical Anchor
bolt not supplied



TECHNICAL SNAPSHOT

Product Code	AFA930316	AFA930316C	AFA930310
Material	Alloy Steel	Alloy Steel	Fully Threaded Stud: Stainless Steel Anchorage Eye: Alloy Steel
Application	Can be easily installed on the concrete and metal structure with the help of M16 chemical as well as mechanical fasteners. The D-ring can be used as an anchor point.	Can be easily installed on the concrete and metal structure with the help of M16 chemical as well as mechanical fasteners. The D-ring can be used as an anchor point.	KStrong Removable Chemical Fastener is provided with a lock to prevent the anchorage eye from coming out of the stud accidentally. This Anchor is capable of being installed on a concrete structure having minimum thickness of 150mm through a Pre-defined hole of 20.0 mm diameter.
Breaking Strength	44kN	44kN	15kN
Finish	Shot blasted and yellow/blue passivation	Shot blasted and yellow/blue passivation	Fully threaded stud: Polished Anchorage Eye: Shot blasted and yellow passivation
Certification	EN 795:2012 Type A, ANSI Z359.1-2007 AS/NZS 5532:2013	EN 795:2012 Type A, ANSI Z359.1-2007 AS/NZS 5532:2013	EN 795:2012 Type A, ANSI Z359.1-2007 & AS/NZS 5532:2013
Weight	280.0 gms ± 20.0 gms	280.0 gms ± 20.0 gms	346.0 gm ± 10.0 gm

Used in Industry



**Edge Stainless Steel M12 X 75mm
Concrete Anchor Point 15kN**
AFA935515(75)

**Edge Stainless Steel M12
Concrete Anchor Point 15kn**
AFA935515

**Edge Stainless Steel M16
Concrete Anchor Point 15kn**
AFA935508



TECHNICAL SNAPSHOT

Product Code	AFA935515(75)	AFA935515	AFA935508
Material	Eye nut: Stainless steel. Whole thread Bolt: Stainless steel.	Eye nut: Stainless steel. Whole thread Bolt : Stainless steel.	Eye nut and Main Body: Stainless steel. Finish: Polished
Application	An anchorage point fastening system comprises a 110mm long M12 Stainless steel Eye bolt for fastening into concrete. Drilling dia.: 14.0 mm.	An anchorage point fastening system comprises a 110mm long M12 Stainless steel Eye bolt for fastening into concrete. Drilling dia.: 14.0 mm.	Bolt anchor design to be fixed on concrete structure to create permanent anchor. Ruber washer for proper installation and making joint leak proof.
Breaking Strength	15kN	15kN	15kN
Certification	ANSI Z359.18-2017 Type A & AS/NZS 5532:2013	ANSI Z359.18-2017 Type A & AS/NZS 5532:2013	EN 795:2012 Type A & AS/NZS 5532:2013
Weight	299.3 gms ± 10.0 gms	299.3 gms ± 10.0 gms	410.0 gms ± 10.0 gms

Webbing Anchors

Used in Industry



Cross Arm and Concrete Arm Strap

KStrong provides a wide range of Webbing Anchor Straps of various configurations and lengths that can be altered as per the requirement. The Edge Anchor Straps can be attached to concrete, Steel or suitable structures that have a minimum rating of 15kN.



TECHNICAL SNAPSHOT

Product Code	AFA920115	AFA920515
Material	44 mm wide Polyester webbing	44 mm wide Polyester webbing
Length	1.5 mtrs	1.07 mtrs
Attachment End	D-Ring on both the ends	D-Ring at one end and textile loop at the other end. Provided with a polyester covering on the load-bearing face of the webbing, for abrasion resistance.
Breaking Strength	23kN	23kN
Certification	EN 795:2012 Type B, AS/NZS 5532:2013	EN 795:2012 Type B, AS/NZS 5532:2013
Weight	300.0 gms ± 10.0 gms	315.0 gms ± 10.0 gms

AFA920015



CE

AFA926015



CE

TECHNICAL SNAPSHOT

Product Code	AFA920015	AFA926015
Material	44 mm wide Polyester webbing	44 mm wide Polyester webbing
Length	1.5 mtrs	1.5 mtrs
Attachment End	Small D-Ring at one end and a bigger D-Ring at other end. Supplied with back pad for added protection when using on sharp edges.	D-Ring at one end and textile loop at the other end
Breaking Strength	23kN	23kN
Certification	EN 795:2012 Type B, AS/NZS 5532:2013	EN 795:2012 Type B, AS/NZS 5532:2013
Weight	577.0 gms ± 10.0 gms	270.0 gms ± 20.0 gms

AFA921515




CE

AFA921005
AFA921010



CE

AFA921016

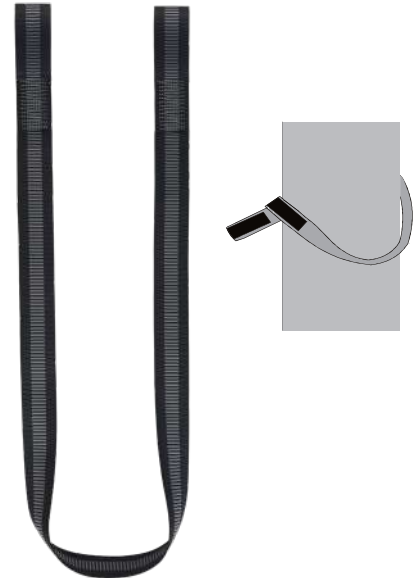

CE

TECHNICAL SNAPSHOT

Product Code	AFA921515	AFA921005	AFA921010	AFA921016
Material	20.0 mm wide Polyester webbing	44.0 mm wide Polyester webbing	44.0 mm wide Polyester webbing	50.0 mm wide Polyester webbing
Length	1.5 mtrs	0.5 mtrs	1.0 mtrs	1.5 mtrs
Attachment End	NA	Textile Loop at Both End	Textile Loop at Both End	Textile Loop at Both End
Breaking Strength	23kN	23kN	23kN	23kN
Certification	EN 795:2012 Type B, EN 566:2017, AS/NZS 5532:2013	EN 795:2012 Type B EN 566:2017	EN 795:2012 Type B EN 566:2017	EN 795:2012 Type B, EN 566:2017
Weight	165.0 gms ± 10.0 gms	128.0 gms ± 10.0 gms	205.0 gms ± 10.0 gms	132.0 gms ± 10.0 gms

HotWorX Welders Cross Arm Strap | AFA927015



CE




TECHNICAL SNAPSHOT

Product Code	AFA927015
Material	44 mm wide Para-Aramid Fiber webbing
Length	1.5 mtrs
Attachment End	D-Ring on both the ends
Breaking Strength	23kN
Certification	EN 795:2012 Type B, ISO 9150:1988 & EN ISO 15025:2002
Weight	260.0 gms ± 10.0 gms


Anchorage Steel Wire Rope Sling

AFA910010
AFA910015
AFA910020

AFA910118

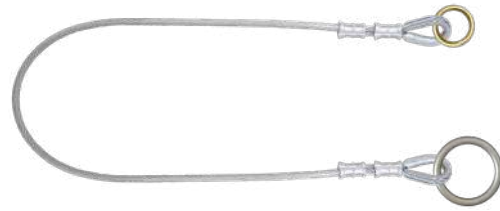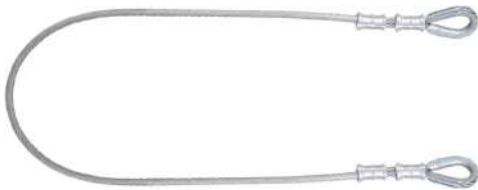

CE



CE

TECHNICAL SNAPSHOT

Product Code	AFA910010	AFA910015	AFA910020	AFA910118
Material	PVC Coated G.I Wire Rope of dia 8.0 mm	PVC Coated G.I Wire Rope of dia 8.0 mm	PVC Coated G.I Wire Rope of dia 8.0 mm	PVC Coated G.I Wire Rope of dia 8.0 mm
Length	1.0 mtrs	1.5 mtrs	2.0 mtrs	1.8 mtrs
Attachment End	Steel thimbles at both the ends	Steel thimbles at both the ends	Steel thimbles at both the ends	One side forged O-ring, and other side small
Minimum Breaking Strength	23kN	23kN	23kN	23kN
Certification	EN 795:2012 Type B, AS/NZS 5532:2013	EN 795:2012 Type B, AS/NZS 5532:2013	EN 795:2012 Type B, AS/NZS 5532:2013	EN 795:2012 Type B, AS/NZS 5532:2013
Weight	460.0 gms ± 10.0 gms	630.0 gms ± 10.0 gms	800.0 gms ± 10.0 gms	720.0 gms ± 10.0 gms

Type E Anchor

Type E anchor devices are created by connecting multiple sections of mass to create a large deadweight and, in many cases, are designed to be used on multiple roof surfaces without the need to affect the roof integrity.

Used in Industry



Counter Weight Anchor

KStrong offers the Counter Weight Anchor which provides an anchorage point on the roofs in absence of guard rails or permanent anchorage devices without damaging the roof surface. Can be dismantled & transported by a single person, since the individual elements do not weigh more than 25 kg each.

FEATURES

Has top steel plates which are hot dip galvanized / ED coated and provide the required weight.


The bottom plates are rubber coated to provide proper grip over the roof surface. All the plates are held together by steel cross bars.

Central extended anchorage eye provides anchorage for upto 2 users and ensures that the connecting lanyard does not rub onto the ground. Can be used as a fall restraint system.



TECHNICAL SNAPSHOT

Product Code	Material	Finish	MBS of System	Total System Weight	Max weight of individual plates (max 10 plates)	Conforms to
AFA935865	High Strength Alloy Steel	ED coated black	15kN	250kgs	25kgs	EN 795:2012 Type E and TS16415:2013 Type E

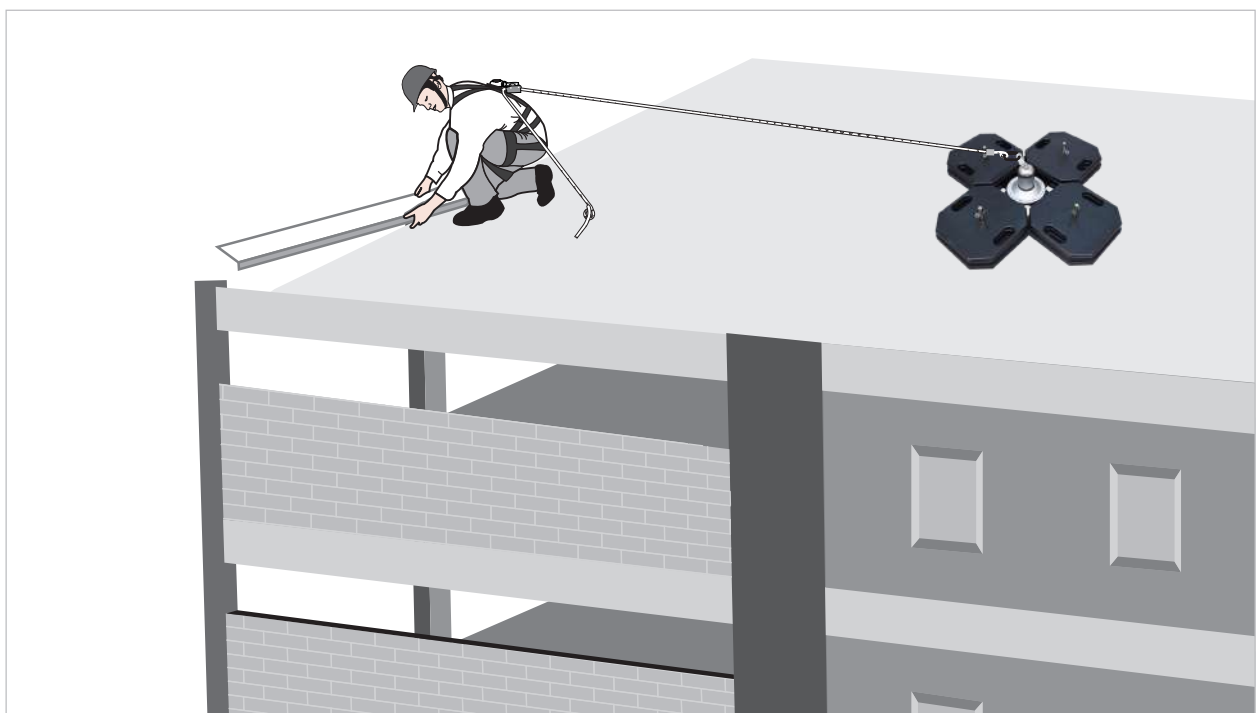

CONFINED SPACE



H-Base Davit Arm

KStrong Extreme Davit systems have been designed for confined space entry / retrieval applications. Its modular interchangeable design allows the system to be mounted on multiple bases for all applications.

Used in Industry





AFT751011

FEATURES

- The Extreme H-Base Davit breaks down into five components for easy storage, transport and set-up. No tools are required for assembly.
- The modular design allows the use of various fixed and portable bases and an optional mast with extensions.
- Cantilever arm comes with 3 adjustment positions for the user to adjust the height as per the requirement.
- An ideal choice to provide overhead anchorages in large holes of confined space.
- Removable legs for easy transportation and installation purpose.
- Anchorage points for rescue applications.
- Simple height adjustment arms with Mini Spirit level.
- Inbuilt swivel feature, Davit column assembly can be rotated upto 360° (without a load) by removing the locking pins provided to lock column and H-Base.



Height adjustment and reach

Product Code	Picture	Bracket used for Mounting
AFT710007UW		Winches AFT730020, AFT730040, AFT730042
AFT710007UR		Retrieval Blocks AFS510020R, AFS510030R

Setting	Upper	Middle	Lower
Distance from Column	0.675mtrs	0.845mtrs	0.920mtrs
Height of arm	2.280mtrs	2.000mtrs	1.660mtrs

TECHNICAL SNAPSHOT

Product Code	AFT751011
Material	High Strength and Durable Aluminium Alloy
Min. & Max. Opening of H Base	Ø1100 mm - Ø1510 mm
Maximum Load Capacity	500 kgs
Finish	ED Coated
System Strength	15kN
Certification	EN 795:2012 Type B & AS/NZS 5532:2013
Weight	62.56kgs ± 0.10kgs

Modular Davits and Bases

Used in Industry



AFT751021



AFT751031



AFT751041



Accessories of Extreme Davit



Core Mounting Sleeve Assembly
AFT755002

Comes with



Wall Mounting Bracket
(AFT7500BW)



Floor Mounting Bracket
(AFT7500BF)

Arm adjustment

Product Code	Picture	Bracket used for Mounting
AFT710007UW		Winches AFT730020, AFT730040, AFT730042
AFT710007UR		Retrieval Blocks AFS510020R, AFS510030R

AFT751021/ AFT751031/AFT751041	Upper	Middle	Lower
Distance from Column	0.675mtrs	0.845mtrs	0.920mtrs
Height of arm	1.900mtrs	1.620mtrs	1.280mtrs

APPLICATION

Public Utilities: Vault and manhole entry, pump / lift / valve stations, water treatment and wastewater industries.

General Industry (Food, Chemical, Pulp and Paper): Elevated manholes, storage tanks, platforms / mezzanines, underground vaults, clarifier tanks, pre-heaters.

TECHNICAL SNAPSHOT

Product Code	AFT751021	AFT51031	AFT751041
Material	High Strength and Durable Aluminium Alloy	High Strength and Durable Aluminium Alloy	High Strength and Durable Aluminium Alloy
Maximum Load Capacity	500 kgs	500 kgs	500 kgs
Finish	Powder Coated	Powder Coated	Powder Coated
System Strength	15kN	15kN	15kN
Certification	EN 795:2012 Type A & AS/NZS 5532:2013	EN 795:2012 Type A & AS/NZS 5532:2013	EN 795:2012 Type B & AS/NZS 5532:2013
Weight	44.49 kg (Davit Weight) 9.38 kg (Floor Mount Base Weight)	44.44 kg (Davit Weight) 9.97 kg (Wall Mount Base Weight)	44.44 kg

Hitch Mounting Davit

AFT751085

Used in Industry



Parts of Hitch Mounting Davit



Lower Mast
AFT751050



Tow-Hitch
AFT751058

Arm adjustment

AFT751085	Upper	Middle	Lower
Distance from Column	0.675mtrs	0.845mtrs	0.920mtrs
Height of arm	2.480mtrs	2.200mtrs	1.890mtrs



AFT710007UR
Universal Mounting Bracket for mounting
Retrieval Blocks
*to be purchase separately

FEATURES

- The Hitch Mounting Davit (AFT751085) is a portable fall arrest system that offers a safe and secure solution for accessing confined spaces where overhead support structures are not available.
- The Davit can be easily and quickly attached to a vehicle with a tow hitch. This allows for convenient transportation and deployment of the system.
- The system comes with a upper mast offset (boom) that offers three adjustment positions. Users can adjust the height of the arm according to their requirements, providing flexibility in different confined space situations.
- The Davit includes a foldable leg, which aids in transportation and installation. The leg can be folded when not in use, making it easier to store and carry the system.
- The Hitch Mounting Davit is compatible with specific KStrong winches, such as AFT730020, AFT730040, AFTZ30042, AFT730120 and AFT730135. It is also compatible with retrieval blocks AFS510020R and AFS510030R . Each of these devices has its respective mounting bracket AFT710007UR for secure attachment to the Davit.
- The trailer hitch mount of the Davit is designed to fit into a 2" (51.0mm) hitch receiver. This allows the system to be attached to any vehicle with a compatible hitch receiver, providing a portable anchor point for confined space entry, retrieval, rescue, and fall arrest operations.
- Certified to EN 795:2012 Type B and AS/NZS 5532:2013

TECHNICAL SNAPSHOT

Material	Maximum Load Capacity	Finish	System Strength	Weight
High strength and durable Aluminium Alloy	500kgs	Powder Coated	15kN	56.54kgs

Dead Weight Davit

AFT751090

Used in Industry



Parts of Dead Weight Davit



Trolley
AFT751095



Dead Weight(26 Nos.)
AFT751025
650.0 kgs ± 0.20 kgs



AFT710007UR
Universal Mounting Bracket for mounting Retrieval Blocks
*to be purchase separately

Arm adjustment

AFT751090	Upper	Middle	Lower
Distance from Column	0.675mtrs	0.845mtrs	0.920mtrs
Height of arm	2.220mtrs	1.950mtrs	1.630mtrs

FEATURES

- The Dead Weight Davit is a portable fall arrest system designed to provide a safe and secure means of accessing confined spaces where traditional overhead support structures and base grouting are not feasible.
- The system consists of a dead weight trolley with 650kgs dead weight plates (excluding trolley weight), providing stability during operation. This ensures that the system remains secure and steady during use.
- The Dead Weight Davit is designed to be compatible with specific KStrong Winches, including AFT730020, AFT730040, AFTZ30042, AFT730120 and AFT730135. It also works with Retrieval Blocks AFS510020R and AFS510030R. Each of these components can be mounted using their respective mounting bracket AFT710007UR.
- The system is equipped with wheels on the trolley, making it easy to move from one location to another. This allows for flexibility and convenience when working in different areas.
- The upper mast offset (boom) of the Dead Weight Davit comes with three adjustable positions, enabling the user to set the height according to the specific requirements of the task or confined space being accessed.
- The trolley is equipped with a height adjuster, which ensures proper stability of the anchor post during operation. This feature enhances safety and security while working at heights.
- Certified to EN 795:2012 Type B.

TECHNICAL SNAPSHOT

Material	Maximum Load Capacity	Finish	System Strength	Weight
High strength and durable Aluminium Alloy	500kgs	Powder Coated	21kN	750kgs ± 0.20kgs including 650kgs dead weight

Extendable Pole Hoist Davit

AFT751080

Used in Industry



Part of Extendable Pole Hoist Davit



Flange Anchor Bracket
AFT730013

Arm adjustment

AFT751080	Upper	Middle	Lower
Distance from Column	1.240mtrs	1.520mtrs	1.750mtrs
Height of arm	2.540mtrs	2.140mtrs	1.320mtrs



AFT710007UR
Universal Mounting Bracket for mounting Retrieval Blocks
*to be purchase separately

FEATURES

- The Davit system has three adjustment points, allowing it to be used in various locations where the anchor point is at a low level. This flexibility enables the system to adapt to different work environments.
- The end of the upper mast offset (boom) of the Davit system is equipped with an inbuilt swivel feature. This allows for rotation and movement, providing enhanced manoeuvrability during operations.
- The Upper mast offset (boom) of the system comes with three adjustable positions, allowing the user to adjust the height according to specific requirements. This adaptability ensures optimal positioning for the task at hand.
- The base of the Davit system is equipped with swivel pads. The pads help provide balance and stability during installation, enhancing the safety and effectiveness of the system.
- The Davit system comes with pre-installed mounting brackets that are compatible with KStrong winches, including AFT730020, AFT730040, AFTZ30042, AFT730120 and AFT730135. It also works with Retrieval Blocks AFS510020R and AFS510030R. Each of these components can be mounted using their respective mounting bracket AFT710007UR.
- The Davit system is designed to be used in both vertical and horizontal confined space entries. This versatility makes it suitable for various confined space applications where a regular anchorage system may not be feasible due to limited height constraints or specific entry requirements.
- Comes with anchor point AFT730013 to be used to access the side entry vessels and tanks.
- Certified to EN 795:2012 Type B & AS/NZS 5532:2013.

TECHNICAL SNAPSHOT

Material	Maximum Load Capacity	Finish	System Strength	Weight
High strength and durable Aluminium Alloy	500kgs	Powder Coated	15kN	13.19kgs ± 0.10kgs

Tripod

KStrong Extreme Tripod has been designed for confined space entry/retrieval applications. Suitable for 2 Users

Its simplistic design allows easy set up providing the user a means of controlled ascent and descent in minimal time.


Used in Industry





AFT710007HD and AFT710010HD

FEATURES

- Double integral head mounted pulleys which is permanently incorporated in the cast aluminum head of the Tripod and provides independent passing over of cable from a Winch and a Retrieval Block.
- Two 23kN auxiliary eye bolts as attachment points.
- Consists of Steel support-shoes provided with rubber sole to increase friction and impart more stability.
- Every Tripod is provided with pre-installed universal mounting attachments to easily mount the Winch and Retrieval Blocks.
- Can be used with Winches AFT730020, AFT730040 and AFT730042 when used with AFT710007UW Winch Bracket and Retrieval Blocks AFS510020R and AFS510030R when used with AFT710007UR Retrieval Bracket.
- Comes with a sturdy bag to pack.



Product Code	Picture	Bracket used for Mounting
AFT710007UW		Winches AFT730020, AFT730040, AFF730042
AFT710007UR		Retrieval Blocks AFS510020R, AFS510030R

TECHNICAL SNAPSHOT

Product Code	AFT710007HD (7ft)	AFT710010HD (10ft)
Material	Aluminium Alloy	Aluminium Alloy
Wheelbase Footprint (Ø)	1.5mtrs	2mtrs
Personal Use	200kgs	200kgs
Materials Handling	650kgs	650kgs
Certified to	EN 795:2012Type B & AS/NZS 5532:2013	EN 795:2012Type B & AS/NZS 5532:2013
System Strength	23kN	23kN
Weight	19.01kgs ± 0.10kgs	23.83kgs ± 0.10kgs



Quadpod With Double Pulley

Experience enhanced stability with the Kstrong Quadpod, a superior alternative to traditional tripods. Designed to offer unparalleled support, the Quadpod AFT710037 is perfect for various applications, including accessing confined spaces, navigating parapets, and tackling diverse scenarios. Its versatile head provides multiple connection options, ensuring effortless setup of hauling or lowering systems. For heightened efficiency during extrication, the optional Quadpod Winch can be securely attached to one of the legs. With adjustable legs featuring non-slip rubber feet, the Quadpod excels on a wide range of surfaces.

Used in Industry



AFT710037

Product Code	Picture	Bracket used for Mounting
AFT710007UW		Winches AFT730020, AFT730040, AFF730042
AFT710007UR		Retrieval Blocks AFS510020R, AFS510030R



FEATURES

- **Adjustable Height:** Achieve a height range of 1.45m to 2.08m from ground level, catering to different requirements and working conditions.
- **Minimum Height:** Legs are spaced 1.1m apart at the foot point, promoting stability and balance.
- **Maximum Height:** Legs extend to 1.55m apart at the foot point, ensuring ample support even at greater elevations.
- **Inner and Outer Sliding Mechanism:** Easily customize the height by sliding the telescopic legs, providing flexibility in setup.
- **Secure Locking Pins:** Stainless steel cables attach the locking pins, offering added safety and reliability.
- **Dual Pulley Configuration:** Two pulley systems are included to simultaneously accommodate the wire rope of the mounted winch on one leg and the retrieval block on the other leg.
- **Consists of pre-installed universal mounting attachments** to easily mount the Winch and Retrieval Block when used with AFT710007UW Winch Bracket and AFT710007UR Retrieval Bracket.

TECHNICAL SNAPSHOT

Product Code	Material	Height	Max. Load Capacity	Weight	Certified to
AFT710037	Legs material: prime quality Aluminium Alloy. Head material: Alloy Steel Locking pins material: Prime quality aluminum alloy eye bolt and and stainless steel locking pin	1.45m to 2.08m	500kgs	32.01kgs	EN 795: 2012 Type B TS 16415:2013 Type B and ANSI Z359.18-2017 Type A (for upto 2 users)

KStrong Extreme Davit

KStrong Extreme Davit provides a safe and secure system for easy access to confined spaces. It has been specifically designed to be used in hostile corrosive environments such as Offshore, Petrochemical Industry, Water Treatment plants and Food processing Industries.


Used in Industry



AFT7500

FEATURES

- Made of highly corrosion resistant stainless steel.
- Can swivel a complete 360 degrees on its mounted base, hence providing a versatile reach and access.
- Height of the Cantilever arm of the Extreme Davit is adjustable. This enables the use of the Extreme Davit even in those areas where the roof height is limited.
- Easily mounted on the floor as well as on the wall through special floor and wall mounting brackets. The Extreme Davit can also be mounted on the floor of heavy vehicles, hence making it extremely versatile in use.
- Equipped with universal mounting bracket to install Winches AFT730020, AFT730040 & AFT730042 onto the Extreme Davit.
- Retrieval Fall Arrester Block AFS510020R, AFS510030R can also be installed for easy retrieval and arresting the fall of the user using the specialized mounting bracket AFT7500B20 and AFT7500B30 respectively.

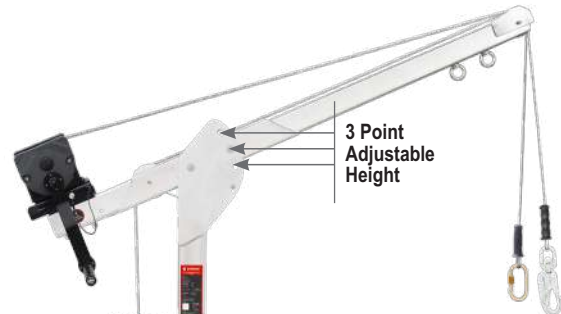

Accessories of Extreme Davit



Wall Mounting Bracket (AFT7500BW)



Floor Mounting Bracket (AFT7500BF)

Product Code	Picture	Bracket used for Mounting
AFT7500B30		30m Retrieval Block AFS510030R
AFT7500B20		20m Retrieval Block AFS510020R

Setting	Upper	Middle	Lower
Distance from bar	0.72m	1.0m	1.08m
Height of arm	2.3m	1.9m	1.5m

TECHNICAL SNAPSHOT

Product Code	AFT7500
Material	Stainless Steel Polished
Maximum Load Capacity	300 kg
System Strength	15kN
Certified to	EN795:2012 Type A & AS/NZS 5532:2013
Weight	Cantilever Arm: 15.9kgs Boom Upright: 19.2kgs Floor mount Base: 9.38kg Wall Mount Base: 9.97kg

Winches

KStrong Extreme Winches have been designed for lifting and lowering, ideal for a range of applications including confined space work, rescue, positioning and personnel/material handling. The KStrong Winches are compatible with Extreme Davits & Tripods.

Used in Industry



AFT730042 (20m)



AFT730120 (20m) & AFT730135 (35m)



FEATURES

- Material or Personal winch
- Secondary Brake mechanism providing additional safety to the user.
- Comes with universal mounting bracket to attach the Extreme Davits and Tripods for quick and easy installation
- Handle rotating mechanism for lifting or lowering
- For Personal use, you must used in-conjunction with a Fall Arrest Block as back up

FEATURES

- Material or Personal winch
- Comes with an independent reel mode for quick and easy installation of the winch
- Equipped with a secondary brake mechanism which reduces the dynamic load impact felt on the user in the event of a fall, to less than 6 kN
- Comes with universal mounting bracket to attach the Extreme Davits and Tripods for quick and easy installation
- Handle rotating mechanism for lifting or lowering

TECHNICAL SNAPSHOT

Product Code	AFT730042	AFT730120 (20m), AFT730135 (35m)
Winch Line Material	Galvanized Steel Wire Rope of dia 4.8mm	Galvanized Steel Wire Rope of dia 6.0mm
Length of Cable	20.0mtrs	20.0mtrs and 35.0mtrs
Maximum Load Capacity	Personal 140kg & Materials 250kg	140kg
Connector	Steel Swivel ANSI Snap Hook	Steel Swivel ANSI Snap Hook
Conforms to	EN 1496:2017 Class B & ANSI Z 359.1-2007	EN 1496:2017 Class B
Weight	11.49kg ± 0.010kg	13.30kgs & 15.25kgs

ROPE ACCESS AND RESCUE



Rope Access

Rope access or industrial climbing is a form of work positioning, initially developed from techniques where ropes and specialized equipment like Pulleys, Karabiners, Rigging plates are used. By using practical ropework it allows workers to access difficult-to-reach locations without the use of scaffolding, cradles, or an aerial work platform.

Why Rope Access?

Rope Access Equipment, Techniques, and Training can be combined to produce an exceptionally versatile, safe, cost-effective and efficient way to solve vertical access challenges.

- Provides access to reach difficult locations.
- Quick Installation and dismantling of the system compared to the traditional methods.
- Less Manpower requirement.
- Rope Access requires far less time spent on site than in preparation for the traditional access method. For example, erection of scaffolding may take longer time than the actual time taken to do the job.
- Rope Access technique is extremely safe as compared to the traditional methods. In traditional access methods like erection of scaffolding or cradling, dropping of tools or trips can account for accidents.
- When scaffolding is erected to complete work on an existing structure it defaces the structure. It also disturbs those who work inside and walk beside the building. With Rope access technique, no such issue occurs as it does not cause any disturbance to those working inside the building.



Mini Triple Sheave Pulley

AFX206019



CE

Mini Sheave Pulley With Lock

AFX206020



CE

Single Pulley with One Side Attachment

AFX206015



CE

Double Pulley with Two Side Attachment

AFX206016



CE

TECHNICAL SNAPSHOT

Product Code	AFX206019	AFX206020	AFX206015	AFX206016
Material	Side Cover- Stainless Steel Sheaves-Nylon 6	Side Cover- Stainless Steel Sheaves-Nylon 6	Body- Aluminium Alloy Sheave- Stainless Steel	Body- Aluminium Alloy Sheave- Stainless Steel
Breaking Strength	40kN	40kN	65 kN	45 kN
Works on	Rope of dia 6.0mm	Rope of dia 6.0mm	10mm to 13mm dia Kernmantle Rope	10mm to 13mm dia Kernmantle Rope
Finish	Polished	Polished	Body- Coloured Anodized Sheave- Electro Polished	Body- Coloured Anodized Sheave- Electro Polished
Weight	55.0 gms±5 gms	62.0 gms±5 gms	264.0 gms±20 gms	437.0 gms±20 gms
Certification	EN 12278:2007	EN 12278:2007	EN 12278:2007	EN 12278:2007

Single Pulley with Three Attachments

AFX206017



CE

SS. Double Tandem Pulley big with SS Sheaves

AFX206004



CE

SS. Double Tandem Pulley Small with SS Sheaves

AFX206009



CE

TECHNICAL SNAPSHOT

Product Code	AFX206017	AFX206004	AFX206009
Material	Body- Aluminium Alloy Sheave- Stainless Steel	Body- Aluminium Alloy Sheave- Stainless Steel	Body- Aluminium Alloy Sheave- Stainless Steel
Breaking Strength	45 kN	40 kN	40 kN
Finish	10mm to 13mm dia Kernmantle Rope	10mm to 12mm dia Kernmantle Rope	Body- Coloured Anodized Sheave- Electro Polished
Works on	Body- Coloured Anodized Sheave- Electro Polished	Body- Coloured Anodized Sheave- Electro Polished	10mm to 12mm dia Kernmantle Rope
Weight	328.0 gms±20 gms	820.0 gms ± 20 gms	820.0 gms ± 20 gms
Certification	EN 12278:2007	EN 795:2012 Type B, EN12278:2007	EN 795:2012 Type B EN12278:2007

Both Side Openable From Top Swivel Assembly

AFX200630



CE

Swivel Assembly

AFX200631



CE

One Side Openable Swivel Assembly

AFX200632



CE

Both Side Openable From Side Swivel Assembly

AFX200633



CE

TECHNICAL SNAPSHOT

Product Code	AFX200630	AFX200631	AFX200632	AFX200633
Material	Swivel- Aluminium Alloy Locking Pins- Stainless Steel Polished	Aluminium Alloy	Pulley- Anodized Aluminum Threaded Locking Pin- Stainless Steel Polished	Swivel- Aluminum Anodised Gates- Stainless Steel
Breaking Strength	23 kN	23 kN	23 kN	23 kN
Finish	Natural Silver / Colored Anodized	Natural Silver / Colored Anodized	Natural Silver / Colored Anodized	Body- Coloured Anodized Sheave- Electro Polished
Weight	221 gm ± 10 gm	135 gm ± 10 gm	155 gm ± 10 gm	210 gm ± 10 gm
Certification	EN 354:2010, PPE-R/11.135 V3	EN 354:2010, PPE-R/11.135 V3	EN 354:2010, PPE-R/11.135 V3	EN 354:2010, PPE-R/11.135 V3

ROPE ACCESS AND RESCUE

Ascender Handle (L)

AFX204002



Ascender Handle (R)

AFX204001



CE

INSTALLATION STEPS



Pulling the spring lever down and outside



Putting the Rope



Pressing the spring lever down to lock the Rope



Checking the locking of the Rope



Putting the Karabiner to ensure that the Rope does not slip



Putting the Ascender handle to ensure the clamp locking

TECHNICAL SNAPSHOT

Product Code	AFX204002	AFX204001
Material	Aluminium Alloy Soft thermo plastic handle	Aluminium Alloy Soft thermo plastic handle
Application	During ascent and occasionally for hauling	During ascent and occasionally for hauling
Works on	10.0mm to 12.0mm dia Kernmantle Rope	10.0mm to 12.0mm dia Kernmantle Rope
Finish	Coloured, Anodized	Coloured, Anodized
Net Weight	196.0 gms ± 10 gms	196.0 gms ± 10 gms
Certification	EN 567:2013 Type 2 Class A & EN 12841:2006 Type C	EN 567:2013 Type 2 Class A & EN 12841:2006 Type C

IRSQ Descender - Jumper

AFX202001



CE

AFX202002



CE

TECHNICAL SNAPSHOT

Product Code	AFX202001	AFX202002
Material	Aluminium Alloy & Soft thermo plastic handle	Aluminium Alloy
Application	Descent on a single rope	For ascent and descent on a single rope
Works on	10 mm dia Kernmantle Rope as per EN 12841:2006 Type C and 11 mm dia Kernmantle Rope as per EN 341:2011 Type 2 Class A	Works on 10.0 mm dia Kernmantle rope for EN 12841:2006 Type C and on 11.0 mm dia Kernmantle rope for EN 341:2011 Class B Type 2
Finish	Coloured Anodized	Colored, Anodized
Weight	340.0 gms±10 gms	440.0gms±10 gms
Maximum rated load	200 kgs	30 kg - 150 kg
Certified to	EN 341:2011 Type 2 Class A, EN 12841:2006 Type C	EN 341:2011 Class B Type 2, EN 12841:2006 Type C

Rigging Plate 4 Holes

AFX203054



Rigging Plate 8 Holes

AFX203058



Figure of 8

AFX208001



Rope Termination Anchor

AFX203050



TECHNICAL SNAPSHOT

Product Code	AFX203054	AFX203058	AFX208001	AFX203050
Material	Aluminium Alloy	Aluminium Alloy	Aluminium Alloy	Aluminium Alloy
Application	For creating a multiple anchor points	For creating a multiple anchor points	Mountaineering activities, Caving, Rafting, Rescue	Mountaineering activities, Caving, Rafting, Rescue
Inner Dia	19mm	19mm	Big: 52mm; Small: 26mm	21.8mm ±1mm
Finish	Natural silver/ Coloured, Anodized	Natural silver/ Coloured, Anodized	Natural silver/ Coloured, Anodized	Natural silver/ Coloured, Anodized
Weight	53.5 gms ±10 gms	210.0 gms ±10 gms	136.0 gms ±10 gms	248.5 gms ±10 gms
Conforms to	CNB/P/11.114	CNB/P/11.114	EN 15151-2:2012	CNB/P/11.114

Textile Ropes For Anchorage Lines

The Kernmantle Semi Static rope is widely used for Rescue Kits, Rope Access, Industry recreational / abseil activities and Industrial applications. Designed to have minimal stretch, low sheath and extremely durable.

Soft and supple with excellent UV and abrasion resistance

Kernmantle Semi Static Rescue Rope 200m Roll

AFX2000105(200) 10.5mm

AFX200011(200) 11mm

AFX200012(200) 12mm



TECHNICAL SNAPSHOT

Product Code	Rope Specifications	Rope Diameter	Weight	Certification
AFX2000105(200) 10.5mm	Kernmantle Semi Static Rope	10.5 mm	0.076 kg ± 0.010 kg	EN 1891:1998
AFX200011(200) 11.0mm	Kernmantle Semi Static Rope	11.0 mm	0.082 kg ± 0.010 kg	EN 1891:1998
AFX200012(200) 12.0mm	Kernmantle Semi Static Rope	12.0 mm	0.098 kg ± 0.010 kg	EN 1891:1998


Rescue

Rope Access technique of movement on a rope should only be used when traditional access systems cannot be installed. The basic rope access equipment should be used with a fall protection system. Rescue technique is used in case of an emergency. Rope Rescue is designed to safely retrieve someone who has fallen from height and is suspended in a harness. This can be achieved by having a rescue plan allowing trained personal to carry out rescues with industrial Rope based kits and accessories.

Rope Rescue Kits

KStrong Pre-assembled Rope based Rescue kits allows the rescuer a fast and effective way to rescue a casualty from various situations when working at height. Can be supplied in various lengths.

- Rescue from Tower cranes
- Sea Port Container Cranes
- Wind Turbines
- Rescue from ladders
- For rescue from a fall arrest lanyard
- For rescue from a rope safety line
- For rescue from inertia reels

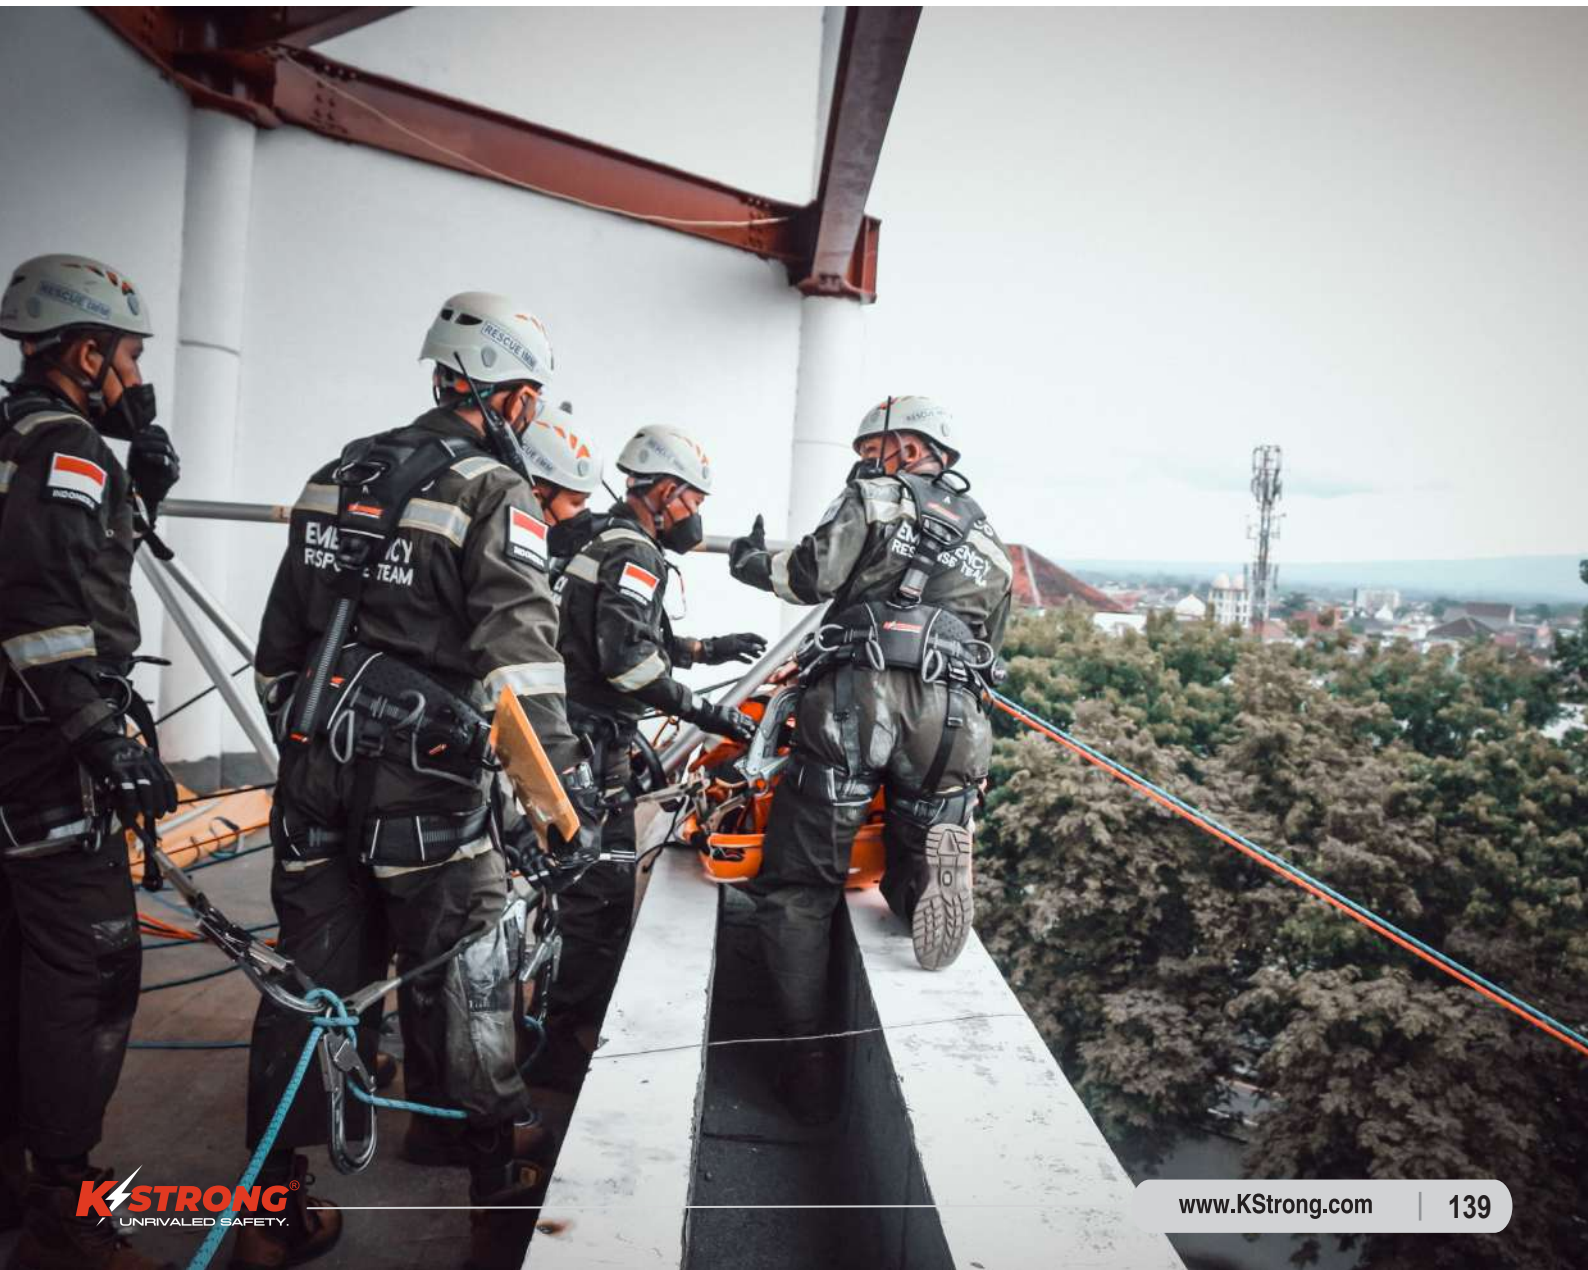

EVAC-R

AFX209070(40)

The KStrong EVAC-R Descender and Rescue device with lifting function is an Automatic and controlled descent for lifting or lowering of injured person. With the added benefit of attaching a powered drill to assist in the rescue allowing the user to use in situations where you are required to raise the casualty over long distances. Alternating descending on both rope ends can be carried out to rescue more than three persons efficiently (shuttle system).

PRODUCT REFERENCE

Product Code	Product Name
AFX209070	EVAC-R
AFX2000105	10.5mm Kernmantle Semi Static Rope (40m)
AFA921515	Webbing Anchor Straps 1.5m
AFX203001	Edge protector c/w 2.0m wire and Karabiner
AFC601415	Aluminum Twist Lock karabiners
AFZ177150	Rescue Bag
Conforms to	EN 341:2011 – 1A, EN 1496:2017 - B, EN 12841Type C & ANSI Z359.4:2013



IRSQ Rescue Kit

AFX209001

KStrong introduces the IRSQ RESCUE KIT specifically designed to be used to rescue a casualty who is currently suspended by a fall arrest lanyard or Fall arrest Block. The Rescuer can raise the casualty to release their current attachment so they can be raised or lowered to safety without the need for the rescuer to access the casualty.

PRODUCT REFERENCE

Product Code	Product Name
AFX204001	Ascender Handle (Right)
AFX202002	Self braking Descender
AFX206008	SS. Double Mini Aluminum Pulley c/w double attachment 25kN
AFG801011	Aluminum Rope Grab for Inertia Reels
AFX200011(50)	11mm Semi Static Kernmantle 50m (10m effective length)
AFA921005	Webbing 50mm Cross Arm Strap 0.5m
AFA926015	Cross Arm Anchor Strap c/w D-ring & textile loop at other 1.5m
AFC601105	Steel Quarter Turn Karabiner
AFX207001	3m Rescue Pole
AFC608401	Aluminum Scaffold Hook 60mm Opening 22kN
AFZ177150	Rescue Bag



Rescue Ladder Kit

AFX209020

KStrong IRSQ Ladder System has been designed for Self-rescue of a conscious user who has had a fall. The Ladder kit allows the user to climb to safety with the added benefit of the rescuer using a backup rope attached to the user which eliminates the chance of a secondary fall.



PRODUCT REFERENCE

Product Code	Product Name
AFX209019	Rescue Ladder 6m
AFA921515	Webbing Anchor Straps 1.5m
AFG801011F	Aluminum Fixed Type Rope Grab for 11mm Kernmantle Rope
AFX2000105(07)	10.5mm Semi Static Kernmantle Rope 7m
AFC601101C	Steel Quarter Turn Locking Karabiner Bulb Type
AFZ177160	Ladder Kit Bag

Rescue Stretcher

AFX205001

KStrong IRSQ Stretcher provides an easy-to-use Recovery Stretcher allowing to Rescue the secured patient from challenging and difficult environments.

FEATURES

- Inert to all conditions, body fluids and blood.
- Highly durable, easy to use and store.
- Combination of optimum support and function.
- Can be used both vertically as well as horizontally.
- Comes with a special marking for identifying the head position of the victim when laid on the stretcher.
- Has instruction labels consisting of technical description, usage instructions, general guidelines, care and maintenance and inspection grid for giving more comprehensive information of the Stretcher to the user.

Kgs 5.5 kgs



TECHNICAL SNAPSHOT

AFX205001	Maximum load: 200 kg Weight of device: 5.5 kg Total weight with bag and belts: 8.0 kg
Loading Surface	Length: 2.438m Width: 0.914m Material: High strength polymer Material of Hooks: Alloy steel
Rope	Length: 9.0 mtrs Dia: 10.0 mm
Lifting Belts	Length: Feet zone 6.7 ft. (2042.0 mm) Head zone 6.4 ft (1951.0 mm) Width: Feet zone 5.0 mm/ Head zone 5.0 mm Maximum load belts: 3000 kg Maximum load Stitching: 2000 kg
Handles	Material: Polyester Number of handles on every longitudinal side: 2

Ideal For Use

For safe carriage and transportation of the wounded user.

Telescopic Pole System

AFA960001

FEATURES

- Telescopic Pole is a perfect solution to create overhead anchors at unreachable heights. It is light in weight, made of fiber glass, and can be effectively used to install an anchorage point from a distance. The total weight of the Telescopic Pole assembly without the hook is approx. 4.6kg, hence can be easily carried.
- Working reach with extension: 10.5m and without extension: 9.5m.
- Dielectric resistance: 30kV
- Comes with an Aluminum Anchorage Hook AFC608410, to anchor at the required distance.

Head

- Length: 240.0mm
- Weight: 185.0gms



Hanging Hook

- Material: Alloy Steel, plastic moulded
- Weight: 190.0gms



Molded nut with Screw pin with a ring on head to enable easy adjustment and to restrict unnecessary movement during usage.

Extension Section

- Length: 1.0m
- Weight: 425.0gms



Telescopic Pole


- Material: Fiberglass
- Maximum length: 7.95m
- Minimum length: 1.95m
- Weight: 3.80kg



* Can be made smaller if required

Aluminum Anchorage Hook

- Material: Aluminum Alloy
- Opening: 54.0mm
- Minimum Breaking Strength: 22kN
- Weight: 480.0gms
- Finish: Natural Silver / Coloured Anodized
- Certified to: EN 362:2004 Class A; EN 795:2012 Type B

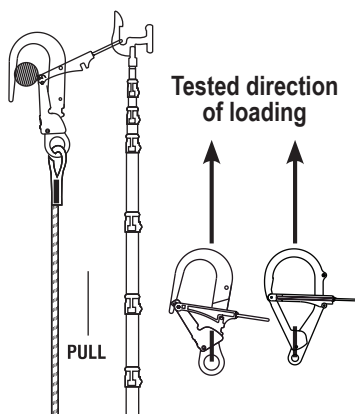

Spreader Bar

AFX201011

FEATURES

- In conjunction with the KStrong Confined Space Harness AFH300203 for raising and lowering a person during rescue.
- The attached webbing loops can be used to secure victim's arms when lifting or lowering.



TECHNICAL SNAPSHOT

Webbing			Metal components		
Material	Width	Breaking strength	Material	Finish	Weight
Polyester	44.0±1.0mm	25kN	Alloy steel	Galvanized	1360.0gms±50gm

Easy Seat

AFX201001

FEATURES

- Ergonomical and comfortable working chair. Provides comfortable seating for an extended time during long hours of work, suspended at a height.
- Can be attached to Suspension Harnesses AFH300404 harness having a central Ring at the waist level (Ventral) to which the Karabiner is attached.
- The loops at the end of the polyester webbing straps can be easily attached to the Ventral D-ring of the Harnesses mentioned.
- Has adjustable straps.
- Equipped with 3 loops for hanging tools, bucket etc.
- Easy to position at the back when not in use.
- Soft cushioned sides prevent the webbing straps from cutting into the thighs.



TECHNICAL SNAPSHOT

Webbing			Metal components		
Material	Width	Breaking strength	Material	Finish	Weight
Polyester	44.0±1.0mm	23kN	Aluminium Alloy	Anodized	1940.0gms±10gm

IRSQ Pilot Chair

AFX201021

Ideal for use

Vertical ascent and descent.

General Features

- Ergonomic and comfortable working chair.
- Spreader Bar available as an optional accessory.
- Conforms to EN 1498:1996.



TECHNICAL SNAPSHOT

Webbing			Metal components		
Material	Width	Breaking strength	Material	Finish	Weight
Polyester	44.0±1.0mm	23kN	Alloy Steel	Galvanized	1648.0 gm ± 50 gm

IRSQ Evacutaion Triangle

AFX201035

Ideal For Use

- During rescue of injured personnel.
- Contains 3 D-rings as attachment elements.
- Adjustable straps to fit the user correctly
- Padded for extra Comfort.
- Conforms to EN 1498:2006



TECHNICAL SNAPSHOT

Webbing			Metal components		
Material	Width	Breaking strength	Material	Finish	Weight
Polyester	44.0±1.0mm	25kN	Aluminum Fiittings	Andodised	1175.0 gm ± 10 gm

IRSQ Rope Edge Protector

AFX203001



FEATURES

- Material- Stainless Steel.
- Protects the rope from abrasion against an edge.
- The edge ring-guides on the angle of the Edge protector prevent different Anchorage Lines from getting entangled over the edge.
- Base- Stainless Steel ED Coated
- Minimum Breaking Strength - 25kN
- Weight- 650gm ± 20gm

Ventral Blocker


AFX204101




FEATURES

- Material: Aluminium Alloy
- Net Weight: 185 gms
- Specially designed for easy connection on user's harness by webbing strap or a connector
- Ideal for use on 10 to 12mm dia Kernmantle rope
- Finish: Colored, Anodized
- Certified to: EN 567:2013, EN 12841:2006 Type B

Edge Protector | AFX203003



Edge Protector | AFX203002



IDEAL FOR USE:

Designed to guide and protect the moving rope from abrasion against uneven surface and sharp edges over different terrains.

FEATURES

- Versatile, compact, and lightweight
- The integrated rollers make the product suitable for lowering and hauling operations.
- Holes on both ends are provided to connect the sling for holding the edge protector.
- AFX203003 comes in set of 3 protectors connected with 4 screw links, additional protectors can be attached allowing longer lengths when are required.
- Equipped with ball bearing rollers which allows for smooth and effortless movement when in use.
- Suitable be used on Brick & Concrete walls, Metal Hatches and Walkways

Rescue/Climbing Helmet

KStrong range of Rescue/Climbing Helmets are an ideal choice for various applications like rescuing victim, mountain climbing, ice climbing, caving, river-trekking, etc. These are light weight, stylish, ventilated, highly durable and sturdy helmets which are equipped with easy adjustable chin strap for a comfortable fit



	AHC101001R (RED)	AHC101001W (WHITE)	AHC101001O (ORANGE)	AHCC101002 (VISOR)
Material	High-Density Polypropylene Shell	High-Density Polypropylene Shell	High-Density Polypropylene Shell	Polycarbonate lens
Quick-Release Ratchet Adjuster	✓	✓	✓	NA
Up & Down System	✓	✓	✓	NA
Leather Chin Strap	✓	✓	✓	NA
Carrying Clips	✓	✓	✓	NA
Ventilation Intake Holes	✓	✓	✓	NA
Adjustable Chin Strap	✓	✓	✓	NA
Type of Chin Strap	4 Point (Y-shape chin strap)	4 Point (Y-shape chin strap)	4 Point (Y-shape chin strap)	NA
Anti-Intrusion Grille	✓	✓	✓	NA
Visor Attachment	✓	✓	✓	NA
Nylon Clips	✓	✓	✓	NA
Anti UV	NA	NA	NA	✓
Anti Fog	NA	NA	NA	✓
Scratch Resistant	NA	NA	NA	✓
Weight	410 gms ± 10 gms	410 gms ± 10 gms	410 gms ± 10 gms	60 gms ± 5 gms
Size	Universal-adjustable from 51 to 62 cm headform	Universal-adjustable from 51 to 62 cm headform	Universal-adjustable from 51 to 62 cm headform	Universal-adjustable from 51 to 62 cm headform
Relevant Standards	EN 12492:2012	EN 12492:2012	EN 12492:2012	EN 166, EN 174

Rescue Kit Bag Water Proof 30L

AFZ177150



Duffle Bag Water Proof 40L

AFZ177197



TECHNICAL SNAPSHOT

Product code	Material	Colour	Size	Weight	Capacity
AFZ177150	500d PVC Tarpaulin	Black & Red	27 x 70 cm	1.34 kg	30L
AFZ177197	500d PVC Tarpaulin	Black	32 x 32 x 51 cm	1.16 kg	40L

CONNECTORS



What is a Connector ?

A Connector is an important element of a Fall Protection System.

The Connectors may be of two types- **Anchorage Connector**, which is at the termination end of the Connecting Element; and the **Harness-Attachment Connector**, which is at the Harness end of the Connecting Element.

Hooks and Connectors come with various unique features

- Hooks and Connectors have a minimum Breaking Strength of 20 kN, and hence conform to the necessary norms.
- These Connectors and Hooks are uniquely zinc electroplated that provides extended corrosion resistant property.
- All the metal components are subjected to stringent methods of Inspection and Testing procedures.
- A 100% Online Inspection, visual check of each and every component is done for proper functioning, and finishing.

Using the Connector Correctly



Press open or unscrew the lock



Open the gate by pressing it inside the body of the hook




Always lock the gate when connected

Advantages of Steel Screw Locking Karabiner

- Reliability in harsh or dirty environments.
- Immediate alert in case of wrong locking.
- Features a threaded nut over gate which locks manually when desired by user.
- Easy to use with one hand.


Functionality Test Carried on Connectors

Gate Closed and unlocked




The Karabiner must not Break

Gate closed and locked




The Karabiner must not Break

Gate Closed




After the test, the gate shall open like a new one. (Gate Function)

Gate Closed




The Karabiner must not Break (Minor Axis)

Gate Closed



After the test, the gate shall open like a new one. Gate Resistance (Gate Face)

Gate Closed



After the test, the gate shall open like new one. Gate Resistance (Gate Side)

Tests Carried Out on Hooks and Connectors



Proof Load Testing

To ensure complete compliance of the Load Bearing metal components, our products are 100% Proof-Load tested at a load of 16 kN.

This means that each Load Bearing metal part passes through a strength test where it is assured of taking a minimum load of 16 kN, without showing any signs of breakage or cracking, before being incorporated into a Harness or Fall Arrest System.

This further reinforces the strict quality measures followed before a product reaches the end user.



Hardness Testing

Since a definite relationship exists between the Hardness of a Metal Component and its Tensile Strength, all the raw material for the Metal Components are tested accordingly. Two methods are widely used Brinell Hardness Test Method; and Rockwell Hardness Test Method.

Only when the basic raw material of the metal components conforms to the requirements of hardness, is the process of manufacturing undertaken.



Salt-Spray Test

This test is carried out to assure maximum resistance of all Metal components to rusting and corrosion. The components are placed in a Salt Spray Chamber and are subjected to neutral salt-spray at a temperature of around 350 celsius, for a period of 72 hours.

All Metal components pass the Salt-spray test for 72 hours, without showing any red rusting and corrosion.

This test ensures the Corrosion resistant properties of the metal components used. All connectors and hooks are therefore conditioned to withstand extremely corrosive conditions, without showing signs of rusting and damage.



Static Strength test

This test is carried on randomly drawn samples, lot wise for major axis, minor axis, gate side, strength and gate-face strength as per requirement.



Spectro Photo Meter Test

Spectrophotometer Test is carried to know the accurate chemical composition of metal.

Inspect the Connector before every use

Caution

A safe personal fall arrest system is one which does not have any weak link. Always perform full inspection of your before every use.




Look closely at the Connector from all sides to check for cuts, kinks etc.



Now through 3 step action check the opening, closing and locking of the gate of the connector.



Check the gate of the Connector-it should be in line with the body of the connector.

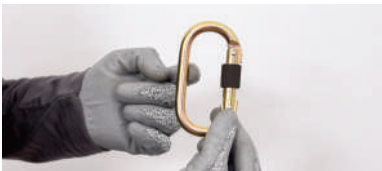

Run your index finger along the surface of the Connector to see for deformities.



Always check the lock function of the Connector-it should work smoothly and the Connector should lock properly.



Always check the marking on the Connector. Check for possibilities of rusting on the gate and lock of the Connector.



Steel Karabiners

Steel Screw Gate Karabiner

AFC601100



Forged

Steel Screw Gate Bulb Type Karabiner

AFC601120



Steel Quarter Turn Locking Karabiner Bulb Type

AFC601101



Steel Quarter Turn Locking Karabiner Bulb Type

AFC601101C



Steel Quarter Turn Locking Karabiner

AFC601105



Steel Double Action Karabiner

AFC601115



TECHNICAL SNAPSHOT

Product Code	Material	Gate Opening	Breaking Strength	Finish	Net Weight	Certification
AFC601100	Alloy Steel	18.0 mm	25 kN	Galvanized with Golden Yellow/Silver passivation	160.0 gm ± 10.0 gm	EN 362:2004 Class B
AFC601120	Alloy Steel	25.4 mm	50 kN	Galvanized with Golden Yellow/Silver passivation	222.0 gm ± 10.0 gm	EN 362:2004 Class B UIAA
AFC601101	Alloy Steel	15.0 mm	23 kN	Galvanized with Golden Yellow/Silver passivation	200.0 gm ± 10.0 gm	EN 362:2004 Class B
AFC601101C	Alloy Steel	15.0 mm	23 kN	Galvanized with Golden Yellow/Silver passivation	200.0 gm ± 10.0 gm	EN 362:2004 Class B
AFC601105	Alloy Steel	22.0 mm	25 kN	Galvanized with Golden Yellow/Silver passivation	236.0 gm ± 10.0 gm	EN 362:2004 Class B
AFC601115	Alloy Steel	19.5 mm	23 kN	Galvanized with Golden Yellow/Silver passivation	210.0 gm ± 10.0 gm	EN 362:2004 Class B

Steel Karabiners

Steel Double Action Bulb Type Karabiner

AFC601121



Steel Triple Action Locking Karabiner

AFC601110



TECHNICAL SNAPSHOT

Product Code	Material	Gate Opening	Breaking Strength	Finish	Net Weight	Certification
AFC601121	Alloy Steel	25.4 mm	50 kN	Galvanized with Golden Yellow/Silver passivation	270.0 gm ± 10.0 gm	EN 362:2004 Class B
AFC601110	Alloy Steel	22.0 mm	25 kN	Galvanized with Golden Yellow/Silver passivation	233.4 gm ± 10.0 gm	EN 362:2004 Class B

Aluminum Karabiners

Aluminum Screw Gate Karabiner

AFC601401



Forged

Aluminum Screw Gate Karabiner

AFC601405



Forged

Aluminum Screw Gate Bulb Type Karabiner

AFC601420



Forged

TECHNICAL SNAPSHOT

Product Code	Material	Gate Opening	Breaking Strength	Finish	Net Weight	Certification
AFC601401	Aluminum Alloy	15.0 mm	23 kN	Natural Silver/Coloured Anodized	80.0 gm ± 10.0 gm	EN 362:2004 Class B
AFC601405	Aluminum Alloy	22.0 mm	23 kN	Natural Silver/Coloured Anodized	75.0 gm ± 10.0 gm	EN 362:2004 Class B
AFC601420	Aluminum Alloy	25.0 mm	23 kN	Natural Silver/Coloured Anodized	95.0 gm ± 10.0 gm	EN 362:2004 Class B

Aluminum Karabiners

Aluminum Double Action Bulb Type Karabiner

AFC601422



Forged

Aluminum Double Action Karabiner

AFC601415



Forged

Aluminum Double Action Bulb Type Karabiner

AFC601421



Forged

Aluminum Triple Action Karabiner

AFC601410



Forged

TECHNICAL SNAPSHOT

Product Code	Material	Gate Opening	Breaking Strength	Finish	Net Weight	Certification
AFC601422	Aluminum Alloy	14.0 mm	23 kN	Natural Silver/Coloured Anodized	85.0 gm ± 10.0 gm	EN 362:2004 Class B
AFC601415	Aluminum Alloy	21.0 mm	23 kN	Natural Silver/Coloured Anodized	84.0 gm ± 10.0 gm	EN 362:2004 Class B
AFC601421	Aluminum Alloy	25.4 mm	23 kN	Natural Silver/Coloured Anodized	105.0 gm ± 10.0 gm	EN 362:2004 Class B
AFC601410	Aluminum Alloy	21.0 mm	23 kN	Natural Silver/Coloured Anodized	79.0 gm ± 10.0 gm	EN 362:2004 Class B

Stainless Karabiners

Stainless Steel Double Action Karabiner

AFC601715



Forged

Stainless Steel Quarter Turn Locking Karabiner Bulb Type

AFC601701



Forged

Stainless Steel Triple Action Locking Karabiner

AFC601711



Forged

Stainless Steel Triple Action Karabiner

AFC601710



Forged

TECHNICAL SNAPSHOT

Product Code	Material	Gate Opening	Breaking Strength	Finish	Net Weight	Certification
AFC601715	Stainless Steel	25.4 mm	50 kN	Polished	265.0 gm ± 10.0 gm	EN 362:2004 Class B
AFC601701	Stainless Steel	16.0 mm	23 kN	Polished	198.0 gm ± 10.0 gm	EN 362:2004 Class B
AFC601711	Stainless Steel	19.5 mm	23 kN	Polished	198.0 gm ± 10.0 gm	EN 362:2004 Class B
AFC601710	Stainless Steel	25.4 mm	50 kN	Polished	265.0 gm ± 10.0 gm	EN 362:2004 Class B

Hooks

Steel Tower hook

AFC608100



Aluminum Anchorage Hook for Telescopic Pole

AFC608410



Forged

Stainless Steel Anchorage Hook

AFC608701



TECHNICAL SNAPSHOT

Product Code	Material	Gate Opening	Breaking Strength	Finish	Net Weight	Certification
AFC608100	Alloy Steel	59.0 mm	23 kN	Galvanized with Golden Yellow/Silver passivation	745.0 gm ± 10.0 gm	EN 362:2004 Class B
AFC608410	Aluminum Alloy	55.0 mm	22 kN	Natural Silver/Coloured Anodized	480.0 gm ± 10.0 gm	EN 362:2004 Class A
AFC608701	Stainless Steel	140.0 mm	20 kN	Polished	362.0 gm ± 10.0 gm	EN 362:2004 Class A

BRUTE Load Arrestors

The Brute Load Arrestors are designed as secondary safety back-up for overhead loads, used in conjunction with a primary lifting device or support, such as a hoist or permanently suspended load.

If the primary support fails, the load arrestor will automatically stop the load from falling, thereby preventing damage to the load and, more importantly, protecting users below.

Cable Load Arrestors are not PPE. Conforms to Machine Directive 2006/42/EC.

Used in Industry



Understanding Load Arrestors

These are backup safety system which arrest the fall of a load in the event of the primary systems failing.

It reduces the risk of equipment damage and protects personnel in and around the danger zone.

Suitable for Basket Ball Hoops, Stage lighting, Car Assembly, Lifts & Industrial Machinery.

KStrong range of Load Arrestors is available to protect loads ranging from 300kgs to 1000kgs with a variety of wire rope lengths based on the four model sizes. These can also be used in conjunction with other Arrestors of the same size to achieve a desired working load capacity

Possible Usage:

KStrong Load Arrester can be used to protect the load double to its capacity by passing the line constituent through the mechanical pulley having sufficient strength to support the load of double the strength of Load Arrester. This configuration allows us to achieve mechanical advantage of 2:1 further increasing the load carrying capacity of unit.

Note: Pulley used must be as light as possible and free in movement so as to control the friction forces to minimum. If left unchecked, may affect the retraction as well as activation speed of the Load Arrester to arrest the load. Proper assessment of the receiving structure must be done by an expert to make sure it can sustain the load. (Please Refer Fig.1)

Fig. 1


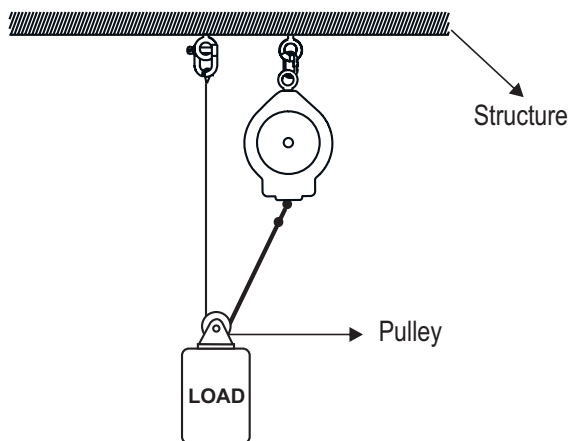


Fig. 2

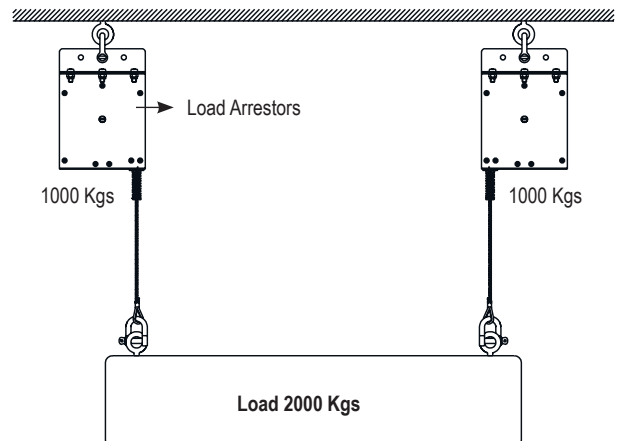

Area of Application

- Automobile industry
- Pharmaceutical sector
- Construction industry
- Logistics and warehousing
- Steel industry
- Cement sector

BRUTE LOAD ARRESTOR

BRUTE Load Arrestors

Used in Industry



AFZ1830010, AFZ1830015



Wire Rope Length 10m and 15m

AFZ1830010	6.26kg
AFZ1830015	6.60kg

AFZ1840010, AFZ1840015, AFZ1840020



Wire Rope Length 10m, 15m and 20m

AFZ1840010	11.16kg
AFZ1840015	11.66kg
AFZ1840020	12.16kg

TECHNICAL SNAPSHOT

Product Code	AFZ1830010, AFZ1830015	AFZ1840010, AFZ1840015, AFZ1840020
Material of Casing	High Impact Polymer Casing	High Impact Polymer Casing
Material and Dia of Lifeline	Galvanized Steel wire rope of dia 4.8mm	Galvanized Steel wire rope of dia 5.8mm
Minimum Breaking Strength of Load Arrestor Assembly	> 4kN	> 6kN
Max Load Capacity	300 kg	400 kg
Certification	ATEX 2014/34/EU	ATEX 2014/34/EU

BRUTE LOAD ARRESTOR

BRUTE Load Arrestors

Used in Industry




AFZ1850010, AFZ1850015



Wire Rope Length 10m and 15m

AFZ1850010	11.66kg
AFZ1850015	12.16kg

AFZ18100010, AFZ18100011, AFZ18100016

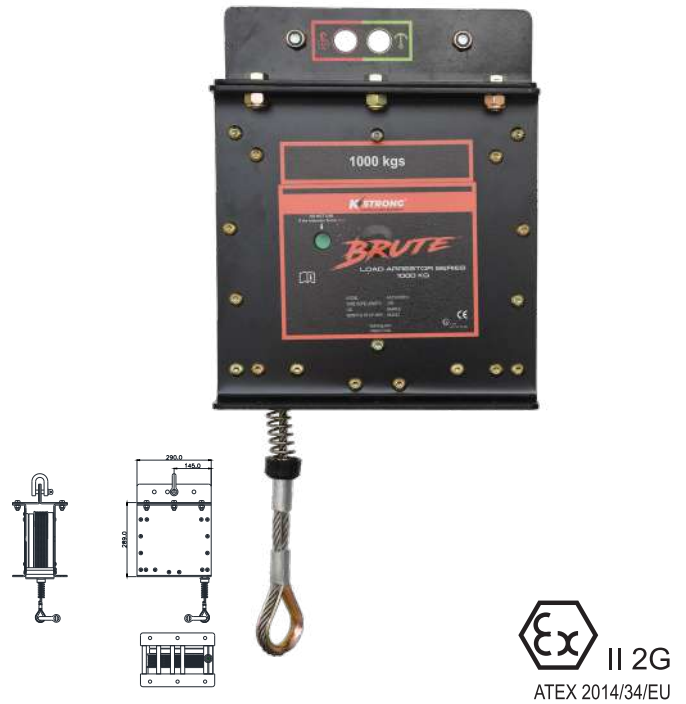

Wire Rope Length 10m, 11m and 16m

AFZ18100010	31.12 kg
AFZ18100011	31.37 kg
AFZ18100016	35.0 kg

TECHNICAL SNAPSHOT

Product Code	AFZ1850010, AFZ1850015	AFZ18100010, AFZ18100011, AFZ18100016
Material of Casing	High Impact Polymer Casing	High Impact Polymer Casing
Material and Dia of Lifeline	Galvanized Steel wire rope of dia 6.0mm	Stainless Steel wire rope of dia 8.0mm
Minimum Breaking Strength of Load Arrestor Assembly	> 7kN	> 13kN
Max Load Capacity	500 kg	1000 kg
Certification	ATEX 2014/34/EU	ATEX 2014/34/EU

On some occasions the tools a user has to carry for specific work at height do not come with built-in or prescribed tether options. KStrong Kaptor™ range of tool tethers is the perfect solution for such cases that help you make secure connections. Different tools require different tether options depending on their shape.

Kaptor Tool Lanyards

Kaptor™ Tool Lanyards provide various multi-purpose fixing, which easily attaches to a range of hand tools with or without attachment points. The Kaptor range comes in 3 parts:

- Tool Attachment
- Tool Lanyard
- Tool Cases

Tool Attachment

KStrong range of Tool Attachments are a simple and easy way to attach to a vast range of hand tools when used with KStrong Q WrapTape.



Kaptor™ Tool Attachment D-Ring Lanyards

DL100301 | Web Tool Tails
1.36 kg - 2.5 inch - (S)



6-PACK

DL100302 | Web Tool Tails
1.36 kg - 4.5 inch - (M)



6-PACK

DL100303 | Web Tool Tails
1.36 kg - 5.5 inch - (L)



6-PACK

DL100304 | Web Tool Tails
1.36 kg - 6.5 inch - (XL)



6-PACK

DL100305 | Web Tool Tails
1.36 kg - 8.5 inch - (XL)



6-PACK

Kaptor™ Tool Attachment Swivel D-Ring Lanyards

DL100351 | Web Tool Tails with Swivel - 1.36 kg - 2.5 inch - (S)



6-PACK

DL100352 | Web Tool Tails with Swivel - 1.36 kg - 4.5 inch - (S)



6-PACK

DL100353 | Web Tool Tails with Swivel - 1.36 kg - 5.5 inch - (S)



6-PACK

DL100354 | Web Tool Tails with Swivel - 1.36 kg - 6.5 inch - (S)



6-PACK

DL100355 | Web Tool Tails with Swivel - 1.36 kg - 8.5 inch - (XXL)



6-PACK

Kaptor™ Tool Attachment Cinch

DL200301 | Tool Cinch -
Medium Duty - 16 kg - 15 inch



DL200311 | Tool Cinch - Single
Wing - Medium Duty - 16 kg - 15 inch



DL200101 | Tool Cinch - Dual
Wing - Medium Duty - 16 kg - 15 inch



DL200201 | Tool Cinch - Dual
Wing - Medium Duty - 36 kg - 24 inch



Kaptor™ Tool Attachment Wire Loops

DL100801 | Wire Loop
Tool Tail - 0.9 kg



DL100802 | Wire Screw Gate
Tool Tail - 1.36 kg



Kaptor™ Tool Attachment Loops

DL100611 | D-ring with Cord Loop Attachment
Points - 2.25 kg - 7.5 inch



Kaptor™ Q Wrap Tape

Self bonding tether Q Wrap Tape is used in conjunction with a range of Tool attachment lanyards and provides a fully load rated anchor point in moments!

- Self-Bonding, doesn't rely on chemical adhesives.
- Heat resistant to 150 degrees Celsius.
- Resistant to water and oil.
- Very resilient and long lasting.



DT700101 | Self-Adhering
Tape Trap - 3.5 m Roll

*Note- Tool tethers also comes in black powder coating.

Kaptor™ Tool Lanyards

KStrong Kaptor Tool Lanyards are manufactured from webbing, heavy duty elasticized webbing and coiled springs with a steel locking Karabiner for added security. Suitable for most applications, reducing snagging issues and the overall impact force of a dropped object. Simple and easy to use

DL100011 | Steel Karabiner with 2" Gate Opening - 4.5 kg - Min: 35 inch, Max: 53 inch



DL100012 | Dual Leg Steel Karabiner with 2" Gate Opening - 4.5 kg - Min: 35 inch, Max: 53 inch



DL100021 | Locking Single Karabiner - 10 kg - Min: 35 inch, Max: 53 inch



DL100022 | Dual Leg Locking Single Karabiner - 10 kg - Min: 35 inch, Max: 53 inch



DL100041 | Tool Lanyard Single Karabiner with Web Loop - 10 kg - Min: 28 inch, Max: 45 inch



DL100042 | Dual Leg Tool Lanyard Single Karabiner with Web Loops - 10 kg - Min: 28 inch, Max: 45 inch



DL100701 | Hook to Loop Bungee Tool Tether - 16 kg - Min: 44 inch, Max: 61 inch



DL100711 | Hook to Loop Tool Tether Heavy Duty - 36 kg - 77 inch



DL100201 | Accessory Kit - Detachable Loops - 2.25 kg - Min: 11 inch, Max: 17 inch



3-PACK

DL100400 | Detachable Elasticated Single Screwgate Karabiner (without Loop) - 2.25 kg - Min: 42 inch, Max: 67 inch



DL100401 | Detachable Elasticated Single Screwgate Karabiner - 2.25 kg - Min: 42 inch, Max: 67 inch



Kaptor™ Tool Lanyards

DL100101 | Elastic Loop
Tool Tails Ext - 7 kg - Min: 11
inch, Max: 17 inch



3-PACK

DL100151 | Elastic Loop
Tool Tails Swivel - 4.5 kg - Min: 11
inch, Max: 17 inch



3-PACK

DL100501 | Coiled Cable
Lanyard - 0.9 kg - Min: 4 inch,
Max: 60 inch



DL100601 | Clip to Loop Coil
Tether - 0.9 kg - Min: 7 inch, Max:
24 inch



10-PACK

DL100023 | Tool Lanyard Mobile
Fixing Holder with VHB Tape



10-PACK

DL100010SW | Retractable Tool
Lanyard with Swivel Karabiner



Kaptor™ Tool Lanyards Accessories

DA300411 | Wrist Tool Lanyard - 0.9 kg



DA300401 | Pull-On Wrist Lanyard with
Buckle - 0.9 kg



DA300101 | Elastic Hard Hat Lanyard w/
Clamp - 0.9 kg - Min: 16 inch - Max: 34 inch



Kaptor™ Tool Lanyards Accessories

DA300201 | Small Tool/Radio Holster - 2.25 kg



DA300301 | Tape Measure Holder - 0.9 kg



DA300501 | Drill Battery Holder - 5 kg



DA300503 | Hammer Holder



Ref. No.	Products Name	Page No.	Ref. No.	Products Name	Page No.
AFA910010	Anchorage Steel Wire Rope Sling	118	AFC601710	Stainless Steel Triple Action Karabiner	157
AFA910015	Anchorage Steel Wire Rope Sling	118	AFC601711	Stainless Steel Triple Action Locking Karabiner	157
AFA910020	Anchorage Steel Wire Rope Sling	118	AFC601715	Stainless Steel Double Action Karabiner	157
AFA910118	Anchorage Steel Wire Rope Sling	118	AFC608100	Steel Tower hook	158
AFA920015	Cross Arm Strap	116	AFC608410	Aluminum Anchorage Hook for Telescopic Pole	158
AFA920115	Cross Arm Strap	115	AFC608701	Stainless Steel Anchorage Hook	158
AFA920515	Cross Arm Strap	115	AFG801001	Rope Grabs	100
AFA921005	Cross Arm Strap	117	AFG801002	Rope Grabs	101
AFA921010	Cross Arm Strap	117	AFG801010	Rope Grabs	100
AFA921016	Cross Arm Strap	117	AFG801011	Rope Grabs	101
AFA921515	Cross Arm Strap	117	AFG801013	Rope Grabs	100
AFA926015	Cross Arm Strap	116	AFG801015	Rope Grabs	101
AFA927015	HotWorX Welders Cross Arm Strap	118	AFH300101	Essential Harness	42
AFA930001SS	Single Point Anchor	112	AFH300102	Essential Harness	42
AFA930101	Parapet Anchor	110	AFH300103	Essential Harness	44
AFA930301	Removable Concrete Anchor	111	AFH300104	Essential Harness	44
AFA930310	Removable Concrete Anchor C/W Sleeve	113	AFH300121	Essential Harness	45
AFA930316	Anchor Bolt	113	AFH300122	Essential Harness	45
AFA930316C	Concrete Anchor	113	AFH300201	Elite Harness	36
AFA930401	Beam Anchor	108	AFH300202	Elite Harness	36
AFA930411	Beam Anchor (Mini)	108	AFH300203	Elite Harness	37
AFA930412	Beam Trolley Anchor	109	AFH300204	Elite Harness	37
AFA930413	Vertical Beam Anchor	109	AFH300206	Elite Harness	38
AFA930501 (M10)	SS Flange Anchor Small	112	AFH300215	Elite Harness	40
AFA930502 (M12)	SS Flange Anchor	112	AFH300250	Elite Harness	38
AFA930530	SS Flange Anchor	112	AFH300251	Elite Harness	39
AFA930602	Container Anchor Post with Swivel Eye	111	AFH300252	Elite Harness	39
AFA930901	Edge Fix Anchor Post	110	AFH300401	Riggers Harness Epic Series	29
AFA930950	Door Anchor	108	AFH300402	Construction Harness Epic Series	29
AFA935508	Edge Stainless Steel M16 Concrete Anchor		AFH300403	Wind Harness Epic Series	30
	Point 15kn	114	AFH300404	Rescue Harness Epic Series	30
AFA935515	Edge Stainless Steel M12 Concrete Anchor		AFH300404C	Rescue Harness with CROLL Epic Series	31
	Point 15kn	114	AFH300405	Tower Harness Epic Series	31
AFA935515(75)	Edge Stainless Steel M12 X 75mm Concrete		AFH300406	Climbing Sit Harness Epic Series	34
	Anchor Point 15kN	114	AFH300407	Confined Space / Evac Harness Epic Series	32
AFA935865	Counter Weight Anchor	119	AFH300409	Derrickman's Harness Epic Series	32
AFA940001	Horizon Temporary Horizontal Webbing		AFH300410	Derrickman's Lite Harness Epic Series	33
	Anchorage Line	90	AFH300701	Element Harness	49
AFA940010	Horizon 4 Man Temporary Horizontal Rope		AFH300702	Element Harness	49
	Anchorage Line	91	AFH300703	Element Harness	50
AFA940012	Horizon 2 Man Temporary Horizontal Rope		AFH300704	Element Harness	48
	Anchorage Line	92	AFH300705	Element Harness	48
AFA940014	Handy Line Temporary Horizontal Lifeline	93	AFH300706	Element Harness	47
AFA945012RSS	T-Line with Rescue Retrieval	95	AFH300707	Element Harness	47
AFA945012SS	Brute T-Line (without Retrieval)	96	AFH301101	Essential Harness	43
AFA945017	Anchor Clevis	97	AFH301102	Essential Harness	43
AFA945024RSS	T-Line with Rescue Retrieval	95	AFH302101	Elite Harness	40
AFA945024SS	Brute T-Line (without Retrieval)	97	AFL401111	ESSENTIAL Shock Absorbing 30mm	
AFA945026	T-LINE Beam Clamp	97		Webbing Lanyards	61
AFA950001	Temporary Vertical Anchorage Line Systems	99	AFL401140	ESSENTIAL Shock Absorbing 30mm	
AFA950201	Temporary Vertical Anchorage Line Systems	99		Webbing Lanyards	61
AFA950202	Temporary Vertical Anchorage Line Systems	99	AFL401150A	EPIC Shock Absorbing Lanyard	57
AFA951201	Temporary Vertical Anchorage Line Systems	99	AFL401160A	EPIC Shock Absorbing Lanyard	57
AFA952012(XX)	Kernmantle Rope Anchorage 12mm line /m	102	AFL401612	ESSENTIAL Shock Absorbing 30mm	
AFA953014(XX)	Twisted rope Anchorage 14mm lines / m	102		Webbing Lanyards	61
AFA960001	Telescopic Pole System	143	AFL401765	KStrong ElectWorX Lanyards	66
AFC601100	Steel Screw Gate Karabiner	154	AFL401865	KStrong ElectWorX Lanyards	66
AFC601101	Steel Quarter Turn Locking Karabiner Bulb Type	154	AFL402901A	EPIC Sharp Edge Shock Absorbing	
AFC601101C	Steel Quarter Turn Locking Karabiner Bulb Type	154		Rope Lanyard	55
AFC601105	Steel Quarter Turn Locking Karabiner	154	AFL402911A	EPIC Sharp Edge Shock Absorbing	
AFC601110	Steel Triple Action Locking Karabiner	155		Rope Lanyard	55
AFC601115	Steel Double Action Karabiner	154	AFL402951A	EPIC Sharp Edge Shock Absorbing	
AFC601120	Steel Screw Gate Bulb Type Karabiner	154		Rope Lanyard	55
AFC601121	Steel Double Action Bulb Type Karabiner	155	AFL403111	ESSENTIAL Shock Absorbing 12mm	
AFC601401	Aluminum Screw Gate Karabiner	155		Twisted Rope Lanyards	62
AFC601405	Aluminum Screw Gate Karabiner	155	AFL403611	ESSENTIAL Shock Absorbing 12mm	
AFC601410	Aluminum Triple Action Karabiner	156		Twisted Rope Lanyards	62
AFC601415	Aluminum Double Action Karabiner	156	AFL405101	ELITE Work Positioning 14mm	
AFC601420	Aluminum Screw Gate Bulb Type Karabiner	155		Twisted Rope Lanyard	60
AFC601421	Aluminum Double Action Bulb Type Karabiner	156	AFL405111	ELITE Work Positioning 14mm	
AFC601422	Aluminum Double Action Bulb Type Karabiner	156		Twisted Rope Lanyard	60
AFC601701	Stainless Steel Quarter Turn Locking Karabiner		AFL405201	ELITE Work Positioning 30mm	
	Bulb Type	157		Webbing Lanyard	60

Ref. No.	Products Name	Page No.	Ref. No.	Products Name	Page No.
AFL405211A	Epic Pole Strap	58	AFT7500BW	Wall Mounting Bracket	122
AFL405301A(PR)	EPIC Work Positioning 12mm Kernmantle Rope Lanyard	58	AFT751011	H-Base Davit Arm	121
AFL405351A(PR)	EPIC Work Positioning 12mm Kernmantle Rope Lanyard	58	AFT751021	Floor Mounting Davit	122
AFL406111	ESSENTIAL Restraint 12mm Twisted Rope Lanyards	63	AFT751025	Dead Weight(26 Nos.)	124
AFL406151	ESSENTIAL Restraint 12mm Twisted Rope Lanyards	63	AFT751031	Wall Mounting Davit	122
AFL406301	ESSENTIAL Restraint 30mm Webbing Lanyards	62	AFT751041	Core Mounting Davit	122
AFL406341	ESSENTIAL Restraint 30mm Webbing Lanyards	62	AFT751050	Lower Mast	123
AFL406601	ESSENTIAL Restraint 12mm Twisted Rope Lanyards	63	AFT751058	Tow-Hitch	123
AFL406650A	EPIC Shock Absorbing Lanyard	57	AFT751080	Extendable Pole Hoist Davit	125
AFL408131	ELITE Shock Absorbing 30mm Webbing Lanyards	59	AFT751085	Hitch Mounting Davit	123
AFL408141	ELITE Shock Absorbing 30mm Webbing Lanyards	59	AFT751090	Dead Weight Davit	124
AFL408211A	EPIC Shock Absorbing Elasticated Lanyard	56	AFT751095	Trolley	124
AFL408251A	EPIC Shock Absorbing Elasticated Lanyard	56	AFT755002	Core Mounting Sleeve Assembly	122
AFL408341A	EPIC Shock Absorbing Elasticated Lanyard	56	AFX2000105(200)	Textile Ropes For Anchorage Lines	138
AFL408612	ELITE Shock Absorbing 30mm Webbing Lanyards	59	AFX200011(200)	Textile Ropes For Anchorage Lines	138
AFL408701	KStrong HotworX Lanyards	64	AFX200012(200)	Textile Ropes For Anchorage Lines	138
AFL408721	KStrong AtexWorX Lanyards	65	AFX200630	Both Side Openable From Top Swivel Assembly	134
AFL408741	KStrong ExtremeWorX Lanyards	67	AFX200631	Swivel Assembly	134
AFL408805	KStrong HotWorX Lanyards	64	AFX200632	One Side Openable Swivel Assembly	134
AFL408825	KStrong AtexWorX Lanyards	65	AFX200633	Both Side Openable From Side Swivel Assembly	134
AFL408845	KStrong ExtremeWorX Lanyards	67	AFX201001	Easy Seat	144
AFS510003.5	Brute SRLs (Wire Rope)	75	AFX201011	Spreader Bar	144
AFS510003.5SE	Brute Sharp Edge	79	AFX201021	IRSQ Pilot Chair	145
AFS510006	Brute SRLs (Wire Rope)	75	AFX201023	Bosun's Chair Epic Series	34
AFS510006SE	Brute Sharp Edge	79	AFX201035	IRSQ Evacutaion Triangle	145
AFS510010	Brute SRLs (Wire Rope)	76	AFX202001	IRSQ Descender - Jumper	136
AFS510010SE	Brute Sharp Edge	79	AFX202002	IRSQ Descender - Jumper	136
AFS510015	Brute SRLs (Wire Rope)	76	AFX203001	IRSQ Rope Edge Protector	146
AFS510015SE	Brute SRLs Sharp Edge (Wire Rope)	80	AFX203002	Edge Protector	146
AFS510020	Brute SRLs (Wire Rope)	76	AFX203003	Edge Protector	146
AFS510020R	Brute Retrievals	82	AFX203050	Rope Termination Anchor	137
AFS510020SE	Brute SRLs Sharp Edge (Wire Rope)	80	AFX203054	Rigging Plate 4 Holes	137
AFS510025	Brute SRLs (Wire Rope)	77	AFX203058	Rigging Plate 8 Holes	137
AFS510030	Brute SRLs (Wire Rope)	77	AFX204001	Ascender Handle (R)	135
AFS510030R	Brute Retrievals	82	AFX204002	Ascender Handle (L)	135
AFS550002	MICRON	84	AFX204101	Ventral Blocker	146
AFS550002LD	MICRON	85	AFX205001	Rescue Stretcher	142
AFS550003.5	Brute SRLs (Webbing)	78	AFX206004 SS.	Double Tandem Pulley big with SS Sheaves	133
AFS550003.5SE	Brute SRLs Sharp Edge (Webbing)	81	AFX206009 SS.	Double Tandem Pulley Small with SS Sheaves	133
AFS550006	Brute SRLs (Webbing)	78	AFX206015	Single Pulley with One Side Attachment	132
AFS550006SE	Brute SRLs Sharp Edge (Webbing)	81	AFX206016	Double Pulley with Two Side Attachment	132
AFS550012	Brute SRLs (Webbing)	78	AFX206017	Single Pulley with Three Attachments	133
AFS550028	MICRON	84	AFX206019	Mini Triple Sheave Pulley	132
AFS550028D	MICRON	84	AFX206020	Mini Sheave Pulley With Lock	132
AFS551002(SW)	Mini Block (Swivel)	85	AFX208001	Figure of 8	137
AFS570010	Brute Sealed Block	73	AFX209001	IRSQ Rescue Kit	140
AFS570020	Brute Sealed Block	73	AFX209020	Rescue Ladder Kit	141
AFS570020R	Brute Sealed 3 Way Retrieval	74	AFX209070(40)	EVAC-R	140
AFS570030	Brute Sealed Block	72	AFZ120011	Essential Harness	46
AFS570030R	Brute Sealed 3 Way Retrieval	74	AFZ150100	Suspension Trauma Straps	51
AFT710007HD	Tripod	126	AFZ177150	Rescue Kit Bag Water Proof 30L	148
AFT710007UR	Universal Mounting Bracket for Mounting Retrieval Blocks	125	AFZ177197	Duffle Bag Water Proof 40L	148
AFT710007UR	Mounting Bracket for Retrieval Blocks	126	AFZ18100010	BRUTE Load Arrestor	162
AFT710007UW	Mounting Bracket for Winch	126	AFZ18100011	BRUTE Load Arrestor	162
AFT710010HD	Tripod	126	AFZ18100016	BRUTE Load Arrestor	162
AFT710037	Quadpod With Double Pulley	127	AFZ1830010	BRUTE Load Arrestor	161
AFT730013	Flange Anchor Bracket	125	AFZ1830015	BRUTE Load Arrestor	161
AFT730042 (20m)	Winche	129	AFZ1840010	BRUTE Load Arrestor	161
AFT730120 (20m)	Winche	129	AFZ1840015	BRUTE Load Arrestor	161
AFT730135 (35m)	Winche	129	AFZ1840020	BRUTE Load Arrestor	161
AFT7500	KStrong Extreme Davit	128	AFZ1850010	BRUTE Load Arrestor	162
AFT7500B20	Bracket for Retrieval Block	128	AFZ1850015	BRUTE Load Arrestor	162
AFT7500B30	Bracket for Retrieval Block	128	AFZ190001	Monkey Board Belt Epic Series	33
AFT7500BF	Floor Mounting Bracket	122	AFZ190176	Retrofit Lanyard Keepers for EPIC and ELEMENT Harnesses	51
			AFZ190177	Retrofit Lanyard Keepers for ELITE Harnesses	51
			AHC101001O	Rescue Climbing Helmet	147
			AHC101001R	Rescue Climbing Helmet	147
			AHC101001W	Rescue Climbing Helmet	147
			AHCC101002	Polycarbonate lens	147
			DA300101	Tool Lanyards Accessories (Elastic Hard Hat Lanyard w/Clamp)	166
			DA300201	Tool Lanyards Accessories (Small Tool/Radio Holster)	167

Ref. No.	Products Name	Page No.
DA300301	Tool Lanyards Accessories (Tape Measure Holder)	167
DA300401	Tool Lanyards Accessories (Pull-On Wrist Lanyard with Buckle)	166
DA300411	Tool Lanyards Accessories (Wrist Tool Lanyard)	166
DA300501	Tool Lanyards Accessories (Drill Battery Holder)	167
DA300503	Tool Lanyards Accessories Hammer Holder	167
DL100010SW	Tool Lanyards Retractable Tool Lanyard with Swivel Karabiner	166
DL100011	Tool Lanyard	165
DL100012	Tool Lanyard	165
DL100021	Tool Lanyard	165
DL100022	Tool Lanyard	165
DL100023	Tool Lanyards (Mobile Fixing Holder with VHB Tape)	166
DL100041	Tool Lanyard (Tool Lanyard Single Karabiner with Web Loop)	165
DL100042	Tool Lanyard (Dual Leg Tool Lanyard Single Karabiner with Web Loops)	165
DL100101	Tool Lanyards (Elastic Loop Tool Tails Ext)	166
DL100151	Tool Lanyards (Elastic Loop Tool Tails Swivel)	166
DL100201	Tool Lanyards (Accessory Kit - Detachable Loops)	165
DL100301	Tool Attachment D-Ring Lanyard (Web Tool Tails)	163
DL100302	Tool Attachment D-Ring Lanyard (Web Tool Tails)	163
DL100303	Tool Attachment D-Ring Lanyard (Web Tool Tails)	163
DL100304	Tool Attachment D-Ring Lanyard (Web Tool Tails)	163
DL100305	Tool Attachment D-Ring Lanyard (Web Tool Tails)	163
DL100351	Tool Attachment Swivel D-Ring Lanyard (Web Tool Tails with Swivel)	163
DL100352	Tool Attachment Swivel D-Ring Lanyard (Web Tool Tails with Swivel)	163
DL100353	Tool Attachment Swivel D-Ring Lanyard (Web Tool Tails with Swivel)	163
DL100354	Tool Attachment Swivel D-Ring Lanyard (Web Tool Tails with Swivel)	163
DL100355	Tool Attachment Swivel D-Ring Lanyard (Web Tool Tails with Swivel)	163
DL100400	Tool Lanyard (Detachable Elasticated Single Screwgate Karabiner (without Loop))	165
DL100401	Tool Lanyard (Detachable Elasticated Single Screwgate Karabiner)	165
DL100501	Tool Lanyard (Coiled Cable Lanyard)	166
DL100601	Tool Lanyards (Clip to Loop Coil Tether)	166
DL100611	Tool Attachment (D-ring with Cord Loop Attachment)	164
DL100701	Tool Lanyard (Hook to Loop Bungee Tool Tether)	165
DL100711	Tool Lanyard (Hook to Loop Tool Tether Heavy Duty)	165
DL100801	Tool Attachment Wire Loops (Wire Loop)	164
DL100802	Tool Attachment Wire Loops (Wire Screw Gate Tool Tail)	164
DL200101	Tool Attachment Cinch (Tool Cinch - Dual Wing- Medium Duty)	164
DL200201	Tool Attachment Cinch (Tool Cinch - Dual Wing - Medium Duty)	164
DL200301	Tool Attachment Cinch (Tool Cinch - Medium Duty)	164
DL200311	Tool Attachment Cinch (Tool Cinch - Single Wing - Medium Duty)	164
DT700101	Q Wrap Tape (Self-Adhering Tape Trap)	164



KStrong Asia Pacific
Contact E-mail : customercare@kstrong.com

www.kstrong.com

USA

SOUTH AMERICA

ASIA
