


MICRON[™] SERIES

AFS550102

KStrong Micron SRL has been designed to use as a fall arrest block and energy absorbing lanyard. It can be attached at foot level, allowing it to be used both vertically and horizontally, ensuring the user's safety whilst working close to an edge. It is robust, durable and the lightest in its range. By using selected Connectors you have the ability to convert to a Twin configuration attaching to the user's harness with ease.

Features

- Light Weight
- 360 Degree Swivel top
- High Impact Load bearing polymer casing
- Length: 2m
- Inbuilt textile Energy Absorber for shock absorption
- AFS550102 supplied with top Aluminum Karabiner
- Aluminum Swivel Scaffold Hook .
- Minimum Breaking Strength >15kN.
- Used Horizontally.
- Used at Foot level –
 - Rated to Fall Factor 2
- Sharp Edge Rated (R>0.5mm).
- Can be attached to all harnesses and used with one or two units - refer attachments AFC609102 & AFC609101.
- QR Code for ease of identification.

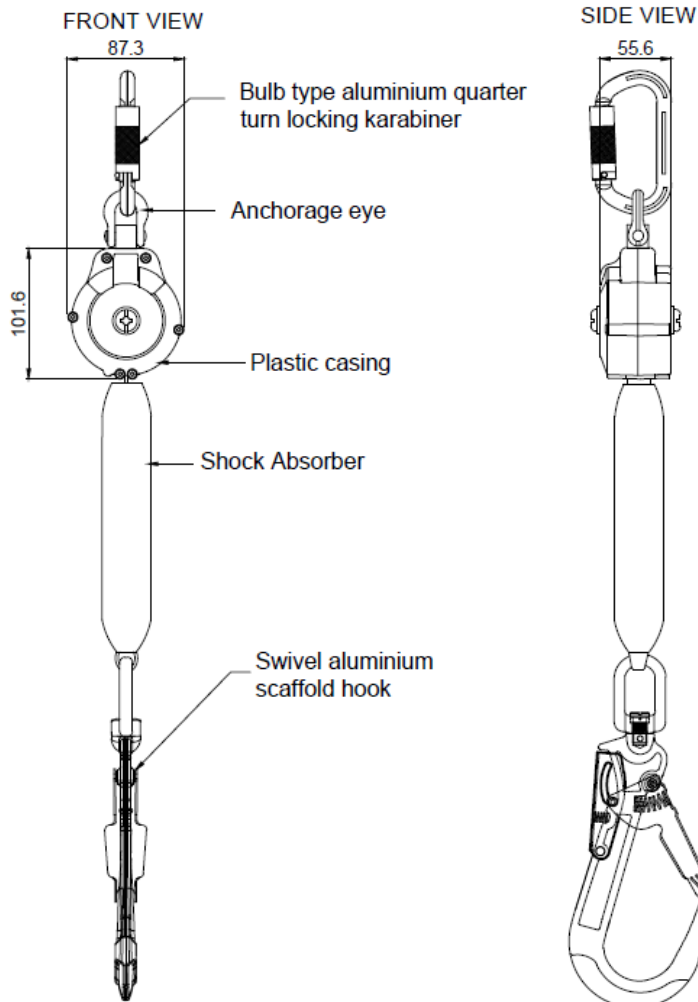

AFC609102



AFC609101



Load Capacity

140Kg Vertical
140Kg Horizontally

Material

Webbing	:	Technocrat 21mm Wide MBS 20kn
Casing	:	Polymer
Shock Absorber	:	Polyester webbing
Metal Components	:	Aluminum Scaffold Hook MBS: 22kN Aluminum Karabiner MBS: 23kN

Weight

AFS550102 - 1.30 kg + 20 gm & AFS550102D - 2.61 kg +/- 20 gm

HowTo Use

Refer to User Instruction Manual



SCAN TO DOWNLOAD

Relevant Standards

EN 360:2002, VG11 RFU # 11.060

