

**KSTRONG®**  
UNRIVALED SAFETY.

**KSTRONG**

**DROP PREVENTION**





**Disclaimer**


The information provided in this brochure is based on the technical data that KStrong obtained under laboratory conditions and believes to be reliable. KStrong does not guarantee results and takes no liability or obligation in connection with this information. Since conditions of end-use are beyond our control, it is the user's responsibility to determine the hazard levels and the use of proper personal protective equipment. Persons having technical expertise should undertake evaluation under their specific end-use conditions, at their discretion and risk. Please ensure that this information is only to check that the product selected is suitable for the intended use. Any product that is damaged, torn, worn, or punctured should be discontinued from usage immediately.

# DROP PREVENTION

On some occasions the tools a user has to carry for specific work at height do not come with built-in or prescribed tether options. KStrong Kaptor™ range of tool tethers is the perfect solution for such cases that help you make secure connections. Different tools require different tether options depending on their shape.

## Attachment Points

- For the tool lanyard to be connected to the tool we need to create an attachment point. The attachment point will be secured to the tool in one of three ways.
- If the tool has an existing opening, you can use a couple of different attachment options. Either use an attachment with a cinch loop or one with a locking gate that can be passed through the tool hole for connection. (Fig A)
- If there is not an existing opening the attachment point can be secured to the tool using the DEWALT Tool Tape. (Fig B)
- In some cases the attachment point may be cinched onto the tool and then taped. (Fig C)

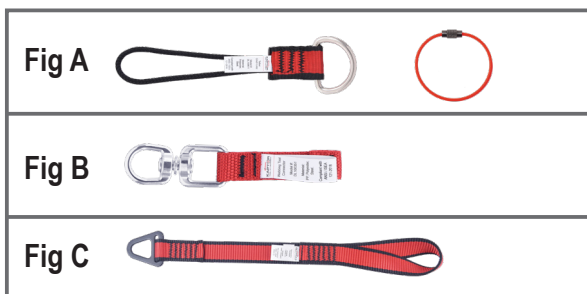

## Kaptor™ Tool Attachment

### D-Ring Lanyards



6-PACK



#### TECHNICAL SNAPSHOT

| Ref. No  | Length                     | SWL               |
|----------|----------------------------|-------------------|
| DL100301 | 2.5 inch / 63.5 mm - (S)   | 1.36 kg / 2.9 lbs |
| DL100302 | 4.5 inch / 114.3 mm- (M)   | 1.36 kg / 2.9 lbs |
| DL100303 | 5.5 inch / 139.7 mm - (L)  | 1.36 kg / 2.9 lbs |
| DL100304 | 6.5 inch / 165.1 mm - (XL) | 1.36 kg / 2.9 lbs |
| DL100305 | 8.5 inch / 215.9 mm- (XXL) | 1.36 kg / 2.9 lbs |

### SwivelD-Ring Lanyards



#### TECHNICAL SNAPSHOT

| Ref. No  | Length                     | SWL               |
|----------|----------------------------|-------------------|
| DL100351 | 2.5 inch / 63.5 mm - (S)   | 1.36 kg / 2.9 lbs |
| DL100352 | 4.5 inch / 114.3 mm- (M)   | 1.36 kg / 2.9 lbs |
| DL100353 | 5.5 inch / 139.7 mm - (L)  | 1.36 kg / 2.9 lbs |
| DL100354 | 6.5 inch / 165.1 mm - (XL) | 1.36 kg / 2.9 lbs |
| DL100355 | 8.5 inch / 215.9 mm- (XXL) | 1.36 kg / 2.9 lbs |

## V-RING TOOL ATTACHMENT

### DL200301

- Used to create a secure attachment point on most tools without a lanyard hole.
- Cinch design allows user to quickly secure equipment
- Secure in place using our Tool Tape
- Coated alloy steel V-Ring attachment point



## V-RING TOOL ATTACHMENT (SINGLE WING)

### DL200311

- Used to create a secure attachment point on most tools without a lanyard hole.
- Cinch design allows user to quickly secure equipment
- Stabilization wing can be used to secure cinch in place using our Tool Tape
- Coated alloy steel V-Ring attachment point



## V-RING TOOL ATTACHMENT (DOUBLE WING)

### DL200101

- Used to create a secure attachment point on most tools without a lanyard hole
- Cinch design allows user to quickly secure equipment
- Two Stabilization wings can be used to secure cinch in place using our Tool Tape
- Coated alloy steel V-Ring attachment point



## V-RING TOOL ATTACHMENT (DOUBLE WING)

### DL200201

- Used to create a secure attachment point on most tools without a lanyard hole
- Cinch design allows user to quickly secure equipment
- Two Stabilization wings can be used to secure cinch in place using our Tool Tape
- Coated alloy steel V-Ring attachment point



### TECHNICAL SNAPSHOT

| Ref. No  | Length             | SWL              |
|----------|--------------------|------------------|
| DL200301 | 15 inch / 381 mm   | 16 kg / 35.2 lbs |
| DL200311 | 15 inch / 381 mm   | 16 kg / 35.2 lbs |
| DL200101 | 15 inch / 381 mm   | 16 kg / 35.2 lbs |
| DL200201 | 24 inch / 609.6 mm | 36 kg / 79.3 lbs |

Step 1



Step 2



Step 3



Step 4



## ELASTIC TOOL ATTACHMENT WITH D-RING

### DL100101

- Shock absorbing design to gradually slow dropped tool
- Elastic Cord Cinch with adjustable barrel lock for tool attachment
- Coated steel alloy D-ring for secure attachment



3-PACK



ANSI/ISEA 121

## ELASTIC TOOL ATTACHMENT WITH SWIVEL D-RING

### DL100151

- Shock absorbing design to gradually slow dropped tool
- Elastic Cord Cinch with adjustable barrel lock for tool attachment
- Coated steel alloy D-ring with swivel connection, for secure attachment



3-PACK



ANSI/ISEA 121

### TECHNICAL SNAPSHOT

| Ref. No  | Length   | SWL              |
|----------|--|------------------|
| DL100101 | Min: 11 inch, Max: 17 inch<br>Min: 279.4 mm, Max: 431.8 mm | 7 kg / 15.4 lbs  |
| DL100151 | Min: 11 inch, Max: 17 inch<br>Min: 279.4 mm, Max: 431.8 mm | 4.5 kg / 8.8 lbs |


#### Step 1




#### Step 2



#### Step 3



#### Step 4



## CINCH LOOP ATTACHMENT

### DL100611

- Designed to safely tether small tools through captive tool hole
- Durable and reusable polyester cord
- Coated alloy steel D-ring for secure attachment



ANSI/ISEA 121

## WIRE TOOL ATTACHMENT(3LBS)

### DL100802

- Corrosion resistant to withstand weathering
- PU coating over cable wire for protection and durability
- Screws easily connect to create a one-step attachment point
- Designed to safely tether small tools through captive tool hole




ANSI/ISEA 121

## WIRE TOOL ATTACHMENT

### DL100801

- Used to create a secure attachment point on most tools without a lanyard hole.
- Cinch design allows user to quickly secure equipment
- Secure in place using our Tool Tape
- Coated alloy steel V-Ring attachment point

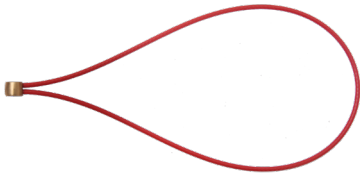

### TECHNICAL SNAPSHOT

| Ref. No  | Length             | SWL               |
|----------|--------------------|-------------------|
| DL100611 | 7.5 inch/ 190.5 mm | 2.25 kg / 4.9 lbs |
| DL100802 | -                  | 1.36 kg / 2.9 lbs |
| DL100801 | -                  | 0.9 kg / 1.9 lbs  |
| DT700101 | 3.5m roll          | -                 |

## TOOL TAPE

### DT700101

- Used to create instant points for tethering
- No heating required for application
- Self-Adhering means no adhesives required



Step 1



Step 2



Step 3



## Kaptor™ Tool Lanyards

KStrong Kaptor Tool Lanyards are manufactured from webbing, heavy duty elasticized webbing and coiled springs with a steel locking Karabiner for added security. Suitable for most applications, reducing snagging issues and the overall impact force of a dropped object. Simple and easy to use

### QUICK CONNECT TOOL LANYARD

#### DL100401

- Durable polyester blended webbing
- Anodized aluminum alloy carabiner with captive eye
- Modular connection for quick exchange of tools



### QUICK CONNECT TOOL LANYARD

#### DL100400

- Shock absorbing design to gradually slow dropped tool
- Elastic Cord Cinch with adjustable barrel lock for tool attachment
- Quick connection point for easy tethering and for secure attachment



## ELASTIC TOOL ATTACHMENT

### DL100201

- Durable polyester blended webbing
- Anodized aluminum alloy carabiner with captive eye
- Modular connecting buckle for quick exchange of tools exchanging tools



3-PACK



ANSI/ISEA 121

### TECHNICAL SNAPSHOT

| Ref. No  | Length   | SWL               |
|----------|--|-------------------|
| DL100401 | Min: 42 inch, Max: 67 inch<br>Min: 1066.8 mm, Max: 1701.8 mm | 2.25 kg / 4.9 lbs |
| DL100400 | Min: 42 inch, Max: 67 inch<br>Min: 1066.8 mm, Max: 1701.8 mm | 2.25 kg / 4.9 lbs |
| DL100201 | Min: 11 inch, Max: 17 inch<br>Min: 279.4 mm, Max: 431.8 mm   | 2.25 kg / 4.9 lbs |

## COILED TOOL LANYARD

### DL100501

- PU coated steel cable for corrosion resistance and durability
- Stainless steel carabiners for quick connection
- Swiveling design prevents tangles and fast recoil



3-PACK



ANSI/ISEA 121

## CLIP TO LOOP SPRING LANYARD

### DL100601

- Lightweight polyurethane cable for tethering lightweight tools and objects such as mobile phones



10-PACK



ANSI/ISEA 121

## MOBILE FIXING HOLDER WITH VHB TAPE

### DL100023

- Designed to suit small tools and other objects.
- Phone fixing Holder with VHB tape.
- Extendable coil tether used to connect the tools with user's harness or to the anchor.



10-PACK



ANSI/ISEA 121

## HARD HAT LANYARD

### DL300101

- High-stretch elastic polyester material
- Double lock buckle attaches to harness or vest
- Tethering loop to connect to slots on hard hat



3-PACK



ANSI/ISEA 121

### TECHNICAL SNAPSHOT

| Ref. No  | Length   | SWL              |
|----------|--|------------------|
| DL100501 | Min: 4 inch, Max: 60 inch<br>Min: 101.6 mm, Max: 1524 mm   | 0.9 kg / 1.9 lbs |
| DL100601 | Min: 7 inch, Max: 24 inch<br>Min: 177.8 mm, Max: 609.6 mm  | 0.9 kg / 1.9 lbs |
| DL300101 | Min: 16 inch, Max: 34 inch<br>Min: 406.4 mm, Max: 863.6 mm | 0.9 kg / 1.9 lbs |
| DL100023 | -  | 0.9 kg / 1.9 lbs |

## WRISTBAND TOOL LANYARD

**DA300411**

- Durable polyester webbing secures to wrist
- Built-in tool lanyard provides quick connection with tool attachment points
- Elastic webbing helps reduce the forces on the wrist in the event of a drop



## SINGLE LEG LANYARD WITH STEEL KARABINER

**DL100011**


- Durable polyester blended webbing
- Elastic Cord Cinch with adjustable barrel lock for tool attachment
- Steel Karabiner with 2" Gate Opening



## TWIN LEG TOOL LANYARD WITH STEEL KARABINER

**DL100012**

- Twin legged design for use with two tools up to 15 pounds per lanyard leg, Durable polyester blended webbing
- Elastic Cord Cinch with adjustable barrel lock for tool attachment
- Steel Karabiner with 2" Gate Opening

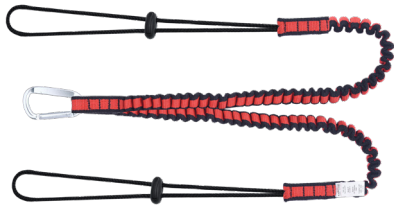

## SINGLE LEG TOOL LANYARD WITH ALUMINUM ALLOY KARABINER

**DL100021**


- Durable polyester blended webbing
- Elastic Cord Cinch with adjustable barrel lock for tool attachment



## TWINLEG TOOL LANYARD WITH ALUMINUM ALLOY KARABINER

**DL100022**

- Durable polyester blended webbing
- Elastic Cord Cinch with adjustable barrel lock for tool attachment

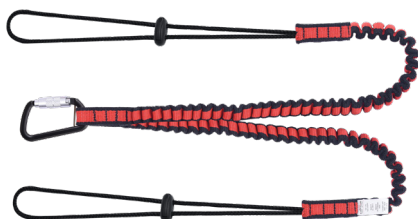

### TECHNICAL SNAPSHOT

| Ref. No  | Length  | SWL              |
|----------|---|------------------|
| DA300411 | -   | 0.9 kg / 1.9 lbs |
| DL100011 | Min: 35 inch, Max: 53 inch<br>Min: 889 mm, Max: 1346.2 mm | 4.5 kg / 9.9 lbs |
| DL100012 | Min: 35 inch, Max: 53 inch<br>Min: 889 mm, Max: 1346.2 mm | 4.5 kg / 9.9 lbs |
| DL100021 | Min: 35 inch, Max: 53 inch<br>Min: 889 mm, Max: 1346.2 mm | 10 kg / 22 lbs   |
| DL100022 | Min: 35 inch, Max: 53 inch<br>Min: 889 mm, Max: 1346.2 mm | 10 kg / 22 lbs   |



## SINGLE LEG LANYARD WITH LOOP

### DL100041

- Durable polyester blended webbing
- Treaded loop end that grips the tool when attached
- Anodized aluminum alloy carabiner with captive eye



## TWIN LEG LANYARD WITH LOOP

### DL100042

- Durable polyester blended webbing
- Treaded loop ends that grips the tool when attached
- Anodized aluminum alloy carabiner with captive eye on both ends



## SINGLE LEG LANYARD (MEDIUM DUTY)

### DL100701

- Durable polyester blended webbing
- Treaded loop end that grips the tool when attached
- Anodized aluminum alloy carabiner with captive eye



## TWIN LEG LANYARD (HEAVY DUTY)

### DL100711

- Durable polyester blended webbing
- Treaded loop end that grips the tool when attached
- Swiveling aluminum alloy carabiner with captive eye and swivel



### TECHNICAL SNAPSHOT

| Ref. No  | Length   | SWL              |
|----------|--|------------------|
| DL100041 | Min: 28 inch, Max: 45 inch<br>Min: 711.2 mm, Max: 1143 mm    | 10 kg / 22 lbs   |
| DL100042 | Min: 28 inch, Max: 45 inch<br>Min: 711.2 mm, Max: 1143 mm    | 10 kg / 22 lbs   |
| DL100701 | Min: 44 inch, Max: 61 inch<br>Min: 1117.6 mm, Max: 1549.4 mm | 10 kg / 22 lbs   |
| DL100711 | 77 inch / 1955.8 mm  | 36 kg / 79.3 lbs |

## Kaptor™ Tool Lanyards Accessories

### WRISTBAND TOOL LANYARD

#### DA300401

- Durable polyester material for long wear
- Pull-on design is easy to take on and off
- Adjusts to any wrist size - One size fits all  
Coated alloy steel D-ring attachment point for tethering lightweight hand tools



### RETRACTABLE TOOL LANYARD WITH SWIVEL KARABINER

#### DL100010SW

- Retractable design reduces snagging hazards in confined spaces.
- Swivel karabiner to prevent twisting, making it suitable for a wide range of applications.
- Can be fitted directly onto a belt or harness with Velcro Loop supplied
- Extends from 12cm to 130cm.



### TAPE MEASURE HOLDER

#### DA300301

- Hook and loop straps secure tape measure inside holder for safe and easy tethering
- Accommodates tape measures up to 35 feet (10.5 meters)
- Rugged polyester nylon body Coated alloy steel D-Ring for connecting to tool lanyards
- Steel belt clip securely attaches to a tool belt
- Maximum safe working capacity



### SMALL TOOL/RADIO HOLSTER

#### DA300201

- Easily connects to standard tool belts and fall protection harnesses
- Rugged polyester body stretches to fit most mobile devices
- A tool lanyard can be attached to the D-ring on the holster for additional safety and security
- Capacity: 5 lbs/2.26kg



#### TECHNICAL SNAPSHOT

| Ref. No    | Length   | SWL               |
|------------|--|-------------------|
| DA300401   | -  | 0.9 kg / 1.9 lbs  |
| DL100010SW | Max 130cm / 51 inch  | 2.6 kg/5.7 lbs    |
| DA300301   | Min: 16 inch, Max: 34 inch<br>Min: 406.4 mm, Max: 863.6 mm | 0.9 kg / 1.9 lbs  |
| DA300201   | -  | 2.25 kg / 4.9 lbs |

## DRILL BATTERY HOLDER

### DA300501

- Designed to hold a drill battery
- Durable polyester material
- Pull-on design easy to take off and on
- Load capacity-5kgs



## HAMMER HOLDER

### DA300503

- Steel loop cradle helps stabilize hammer
- Added padding helps keep handle away from body
- Keeps hammer always within reach without hurting your waist



### TECHNICAL SNAPSHOT

| Ref. No  | Length | SWL              |
|----------|--------|------------------|
| DA300501 | -      | 5 kg / 11 lbs    |
| DA300503 | -      | 2.5 kg / 5.5 lbs |







KStrong Asia Pte Ltd  
33A Chander Road,  
Singapore 219539  
Email: [customercare@kstrong.com](mailto:customercare@kstrong.com)  
[www.kstrong.com](http://www.kstrong.com)

---

USA

SOUTH AMERICA

ASIA

---