

## ELEMENT FULL BODY HARNESS SERIES

KStrong **AtexWorX** harnesses have been designed for use in potentially **explosive** atmospheres whilst protecting the user.

AFH300703



Ideally used in **Mining, Petrochemical industries & Confined Space** where there is need to prevent any **Electrostatic discharge** igniting the **explosive atmosphere**.

## ELEMENT ATEXWORX FULL BODY HARNESS SERIES

### HARNESS CODES

AFH300703

### FEATURES

FEATURES	
<b>Harness Weight</b>	<b>1.39kg</b>
Front D Ring Fall Arrest	
Rear D Ring Fall Arrest	✓
Front Fall Arrest Loops	✓
Dielectric Fittings 14V (Non Conductive)	
Stainless Steel Fittings	✓
Flame Retardent Webbing	
Anti Static Webbing	✓
Endure Webbing (Oil & Water Repelant)	
Elasticated Shoulder Straps	
Rear Extension Strap	✓
Rescue Loops	
Padded Waist Belt with Side D Rings & Tool Loops	
Rear Sit Strap	✓
Fall Arrest Indicator Tags	✓
Label / Instruction Pouch	✓
Compass Asset Technology	✓
USER WEIGHT LIMIT	
Refer to Energy Absorbing Lanyards & Fall Arrest Blocks data for maximum usage	140kg
RELEVANT STANDARDS	
EN 361:2002	✓
EN 358:2018	
EN ISO 9150:1988	
ATEX 2014/34/EU	✓
EN 1149-1:2006 & EN 1149-5:2008	✓
EN ISO 80079-36:2016 & EN ISO 80079-37:2016	✓
EN ISO 15025:2002	

### SUITABLE FOR

SUITABLE FOR	
Construction	✓
Maintenance	✓
Fall Arrest	✓
Ladder Safety Systems	✓
Roof Work	✓
Elevated Work Platforms	
Confined Space Entry	
Tower / Pole Work	
Welding / Hot Works	
Wet & Corrosive Environments	
Offshore	
Explosive Environments	✓
Electrical	


# ELEMENT ATEXWORX

## FULL BODY HARNESS SERIES

### MATERIAL SPECIFICATION

WEBBING	THREAD / STITCHING	METAL COMPONENTS	WEBBING KEEPERS	WEB ENDS	PADDING
Polyester Anti-Static 44 mm wide MBS 25 kN	High Tenacity Polyester (Colour Contrasted)	Buckle & Frame – Stainless Steel (MBS-15 kN)  D-Ring – Stainless Steel (MBS-23 kN)  Finish – Polished	Elastic Loops provided for webbings	Stitched with Web holders	Comfort Pad Made Up Of Air Mesh, Insushield & Matty

### Harness Sizing Chart

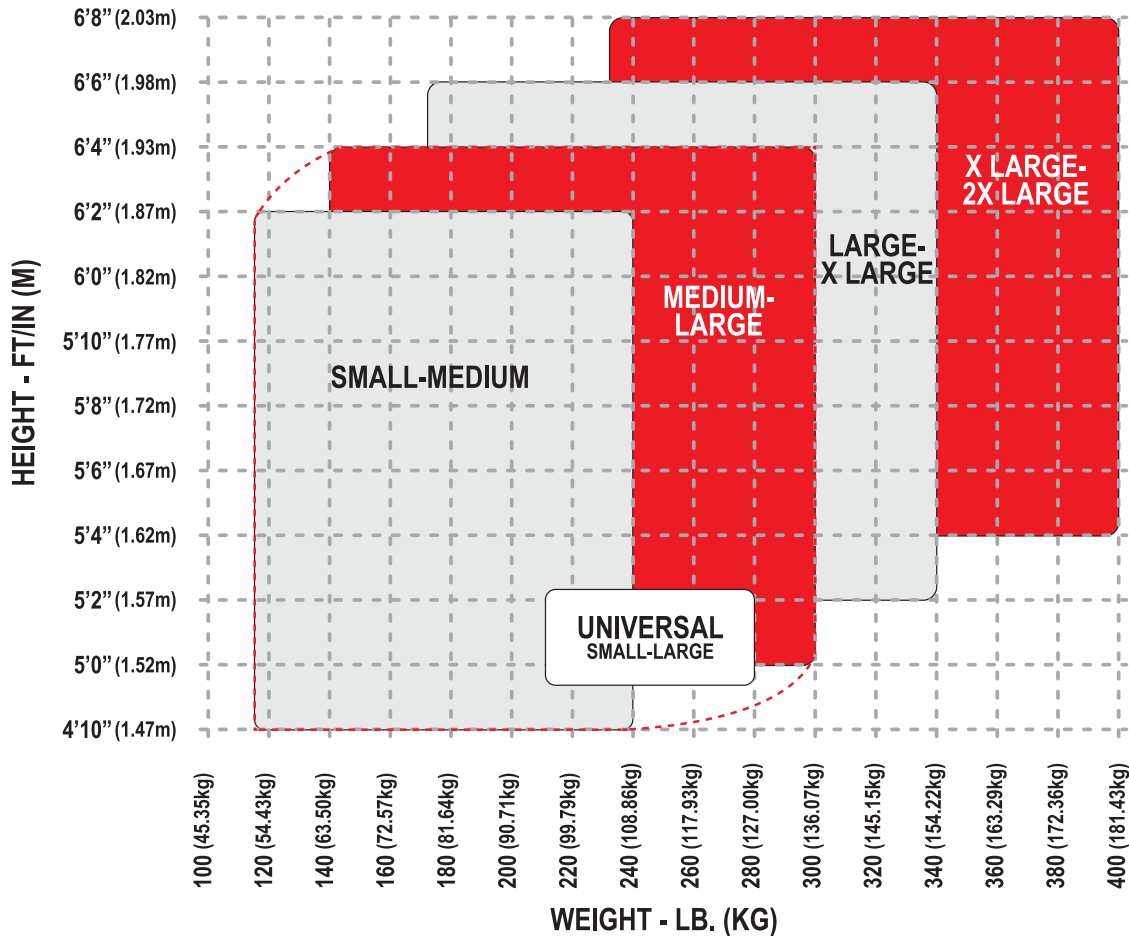

## ELEMENT ATEXWORX FULL BODY HARNESS SERIES

AFH300703

KStrong AtexWorX harnesses have been designed for use in potentially explosive atmospheres whilst protecting the user. Ideally used in Mining, Petrochemical industries & Confined Space where there is need to prevent any Electrostatic discharge igniting the explosive atmosphere.

### FEATURES

- Front Fall Arrest Loops
- Stainless Steel Fittings
- Anti Static Webbing
- Rear Extension Strap
- Fall Arrest Indicator Tags
- Label / Instruction Pouch
- Compass Asset Technology
- Easy Adjustment

### HOW TO USE

Refer to User Instruction Manual



### MATERIAL COMPONENTS

Webbing:	44mm Anti-Static, MBS 25 kN
Fittings:	Stainless Steel Polished, MBS 23 kN
Webbing Keepers:	Elasticated Polyester
Lanyard Keepers:	Polyethylene
Rear ID plate:	Polyethylene

### USER WEIGHT LIMIT

140 kg

### WEIGHT

1.39 kg

### RELEVANT STANDARDS

EN 361:2002  
ATEX 2014/34/EU  
EN 1149-1:2006 & EN 1149-5:2008  
EN ISO 80079-36:2016 & EN ISO 80079-37:2016

