


KStrong Vulcan SRL has been designed to use as a fall arrest block and energy absorbing lanyard. It can be attached at foot level allowing it to be used both vertically and horizontally, ensuring the users safety whilst working close to an edge. It is robust, durable and the lightest in its range.

Features

- Light Weight
- 360 Degree Swivel top
- High Impact Load bearing polymer casing
- Length: 2m
- Inbuilt textile Energy Absorber for shock absorption
- Aluminum Swivel Hook with Fall Indicator.
- Minimum Breaking Strength >15kN.
- Used Horizontally.
- Used at Foot level –
 - Rated to Fall Factor 2
- Ease of connecting the user's lanyard to the HLL using a karabiner.
- Sharp Edge Rated (R>0.5mm).
- Can be attached to all harnesses and used with one or two units - refer attachments AFC609102
- Temperature Range -30 to +50 deg.
- QR Code for ease of identification.
- Can be supplied with a range of different hook options on request.

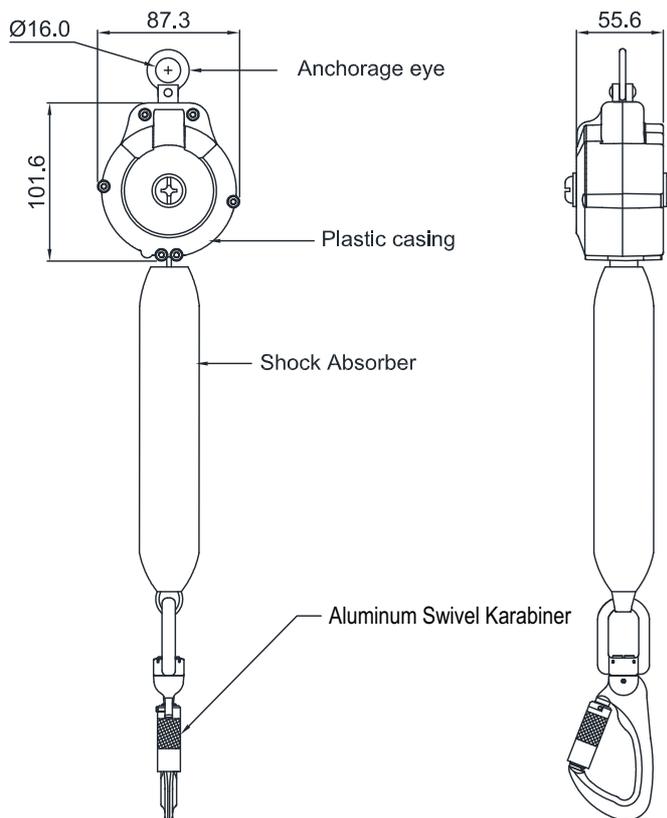

Load Capacity

150Kg Vertical
150Kg Horizontally

Material

Webbing	:	Dyneema 21mm Wide MBS 20kn
Casing	:	Polymer
Shock Absorber	:	Polyester webbing
Karabiners	:	Triple Action Aluminum MBS 23kN & 16kN Gate Strength

Weight

960.09 gm + 40 gm

HowToUse

Refer to User Instruction Manual



Relevant Standards

AS/NZS1891.3:2020 & EN 360:2002, VG11 RFU # 11.060

CE 0598

