

IRSQ GRIP DESCENDER

AFX202001

Features

- It is equipped with a unique Self Breaking System which initiates the brake as soon as the handle is released, or clasped too tightly.
- Suitable to use with 10mm to 11mm Kernmantle rope.
- When used as a part of ascender kit, it also provides a unidirectional movement of rope for safe ascent.

How To Use

Refer to User Instruction Manual



Metal Components

Material : Aluminum Alloy
Finish : Anodized in different colors

Rated Load Capacity

Min. Rated Load : 30 kgs
Max. Rated Load : 200 kgs

Permissible Descent Velocity

2 m/s (Max.)

Max. Descent Distance


200 m

Weight

340 gm \pm 15 gm

Relevant Standards

Tested as per EN 12841 2006 TYPE C & EN 341:2011
CLASS A

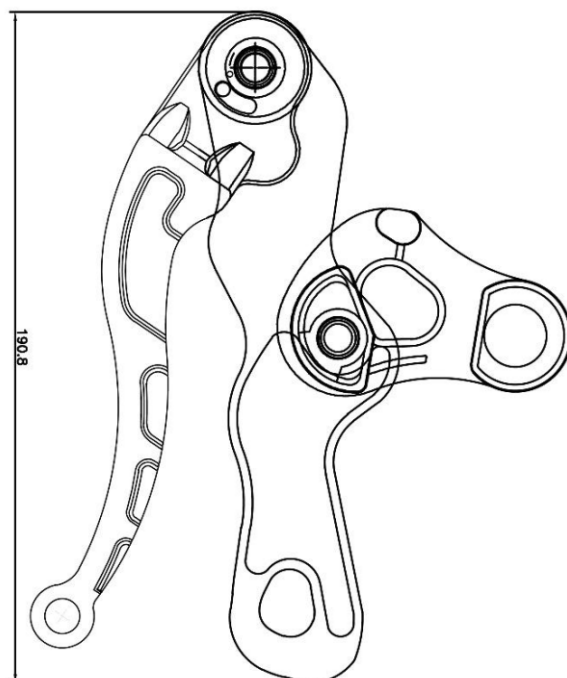

CE 0598