


AFF4000

IMPACT SERIES

HORIZONTAL LIFELINE SYSTEM

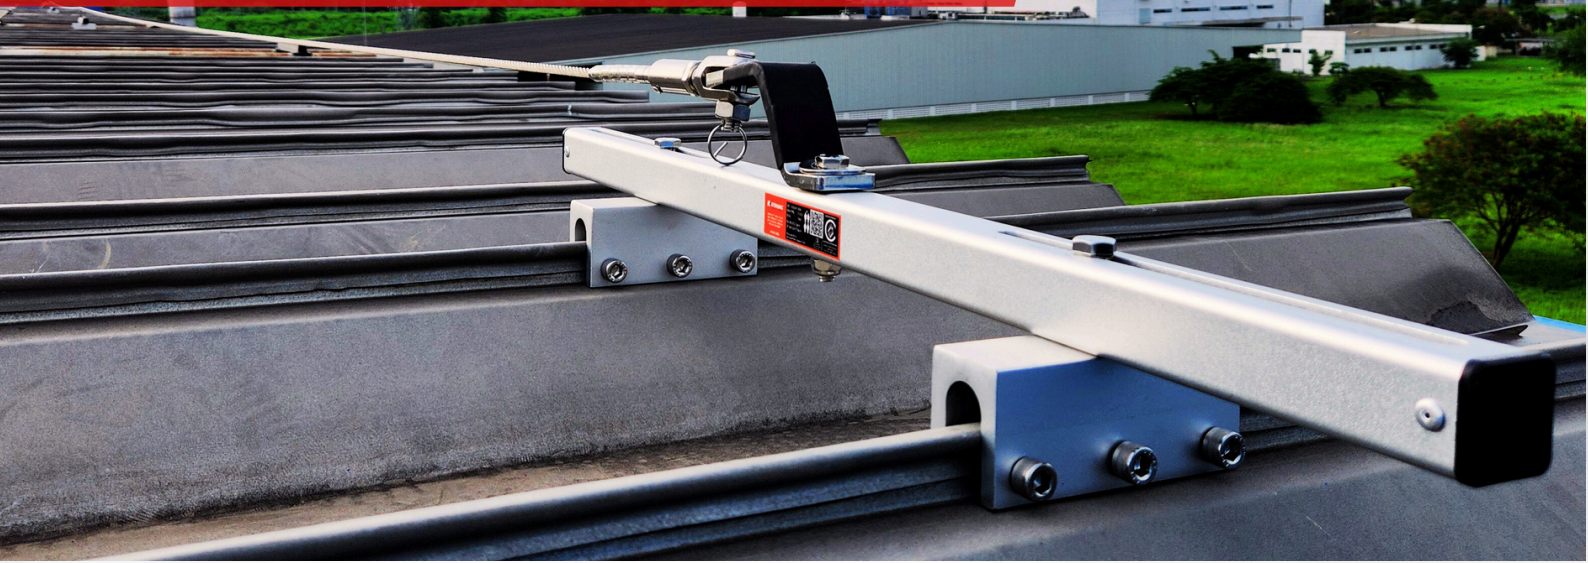

OVERVIEW

The AFF4000 IMPACT lifeline series is designed for commercial and industrial buildings of all structural types and covers all your working-at-heights requirements for maintenance, cleaning, access and inspections. It provides a permanent connection for up to 4 users without interruption along the entire length of the horizontal wire cable line through the intermediate posts, thus ensuring 100% anchorage of the user at all times.


HIGHLIGHTS

- Conforms to EN795:2012 Type C and TS 16415:2013, Norms EN 13463-1: 2009 and EN 13463-5: 2003
- Certified by Sira for ATEX to comply with use in potentially explosive atmosphere
- Ideal choice for use in Industries like Petroleum/ Petro-Chemical Plants without fear of causing explosion due to any spark




IMPACT COMPONENTS


TRAPEZOIDAL ROOF PROFILE

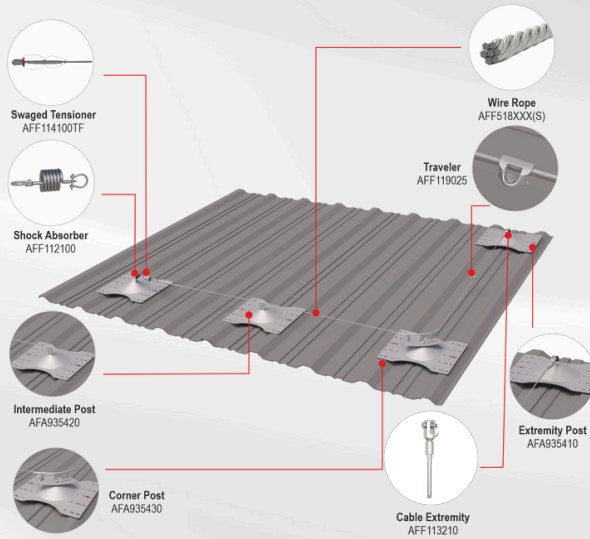

KLIPOK ROOF PROFILE

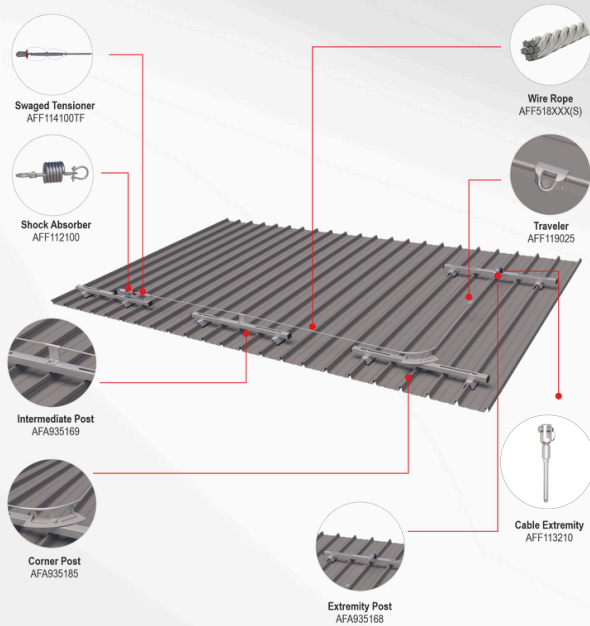

STANDING SEAM ROOF PROFILE

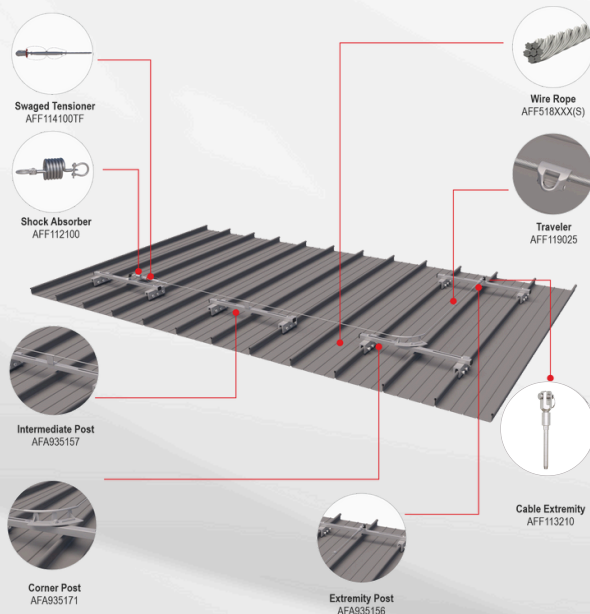

FEATURES

- Certified for up to 4 users
- Manufactured from 6061 T6 Aluminum and 316 Stainless Steel
- Suitable for Trapezoidal, Standing Seam, and Kliplok Roof Profiles
- 8mm wire cable thickness (grade 316)
- Suitable for both fall arrest and fall restraint
- Inbuilt shock absorber with tension indicator
- Passed system operating temperatures between -40°C to $+60^{\circ}\text{C}$
- Uses water proof rivets and self drilling screws to attach to the roof posts



SPECIFICATIONS

- The IMPACT Cable Line Fall Arrest System is certified to EN795:2012 Type A, B, C, and CEN/TS 16415:2013, It is suitable for up to four users simultaneously. It is also being certified by Sira (Certification Number: 11ATEX6276X) for ATEX to comply with use in explosive atmospheres which conforms to Norms EN 13463-1:2009 and EN 13463-5:2003. Carriage Body conforms and is certified to EN795:2012 Type B anchor device.
- Flexible anchor line with linear elastic performance properties with a defined elastic coefficient. The impact load generated by the fall arrest systems doesn't exceed 10kN as applied to the structure. Energy absorber can absorb up to 7,800 Joules.
- The fall arrest system will be suitable for unrestricted use by up to four users at any one time and any point along the length of the system including between two anchor brackets.
- The rooftop anchor post is manufactured from 316 stainless steel, 6061 T6 Aluminum, 6005 T5 Aluminum which suitable for metal roof and PEB structures.
- The span distance shall be between 12 m to 15 m between end, corner, and intermediate anchor brackets.
- Wire Rope to be \varnothing 8 mm 7 x 19 316 stainless steel wire cable with a 34 kN minimum breaking load,
- The swage termination is manufactured from 316 stainless steel. The swaging is done using a 130kN hydraulic swaging hand tool and hexlock dies at 6 positions.
- Extremity, corner, and intermediate brackets manufactured from 316 stainless steel.
- Labeled according to EN 365:2004 General requirements for instruction for use, maintenance, periodic examination, repair, marking, and packaging in accordance to EN795.
- System Design, application, installation, maintenance, repair, annual inspection, and certification undertaken only by KStrong Registered Installers. Details provided upon request



WARRANTY & SERVICES

- The system comes with a warranty period of 24 months
- The systems are thus further warrantied with 20 years provided they are inspected once annually according to the requirements of EN365
- Competent person training to use the systems will be provided with the competent person certificate
- Competent person training to conduct the periodic inspection will be provided



RECOMMENDED PPE

While working on a roof the user can select from a range of KStrong fall protection PPE to work safely with either Lanyards, Rope lines or SRL's in conjunction with a Full Body Harness.



Energy
Absorbing
Webbing
Lanyard
AFL408131



Work
Positioning
Lanyard with
Grip Adjuster
AFL405111



Rope Line
with Shock
Absorber
AFA951201



2m Micron
SRL
AFS5500022



Full Body
Roofers
Harness
AFH300203

CONTACT US



customercare@kstrong.com



www.kstrong.com/asia

SCAN TO VIEW
VIDEO



SCAN TO VIEW
PRODUCT

