

BRUTE SEALED TYPE 3 RETRACTABLE FALL ARREST BLOCK WITH RETRIEVAL

KStrong has developed a range of Sealed Retractable Fall Arrest Blocks with an integrated Rescue Retrieval function. They are suitable for the most extreme environments. The heavy duty sealed design, corrosion resistant material used in the Block ensures the critical working components are kept free of dirt, grease, water, and chemicals. Ideally suited for Oil and Gas, Sewage Plants and all Offshore areas.



CE 0598

EN 360:2002,
P68 Level of IEC 60529,
EN 1496:2017 Class B


EN 80079-36:2016
EN 80079-37:2016



IT IS EASY TO SHIFT TO WINCH MODE FROM BLOCK MODE
(AND VICE VERSA) FOLLOWING THE BELOW STEPS

BLOCK MODE


Enables easy movement of the user while working in confined space

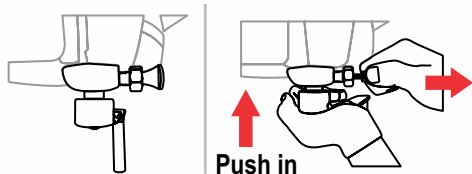

Pull the pin and push the handle to reverse in Block mode

WINCH MODE

Enables easy retrieval of the victim post fall arrest

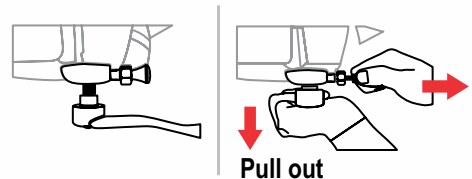

Pull the pin and handle to shift to Winch Mode

Features and Benefits

- Swivel Anchorage Eye
- High Impact Load Bearing Polymer Casing
- Ergonomic Carry Handle for ease of transportation
- Locking Pin to engage and release Fall Arrest and Rescue mode
- Integrated manual rescue mode function (hoisting and descending)
- Automatic Retractable Block
- Hydro Seepage System to allow water to be drained from block
- 4.5mm Stainless Steel Cable for added strength and safety
- Snout reduces the locking of the cable when it is suddenly released
- Load Capacity 140kg
- MBS: 15kN
- Temperature Range : -30° to +50° C
- QR code for ease of Identification and Service History
- Stainless Steel Swivel Snap Hook with Fall Indicator

Materials

- Polymer & Stainless Steel Casing
- 4.5mm Stainless Steel Wire - MBS 15kN
- Stainless Steel Swivel Snap Hook - MBS 23kN
- Stainless Steel Karabiner - MBS 23kN

How To Use

- Refer to User Instruction Manual



AFS510020R

Length: 20m
Weight: 13.14kg



AFS510030R

Length: 30m
Weight: 19.3kg