

## KStrong® Single Use Steel Roof Anchor (ANSI)

Model: UFA30010

KStrong® Single Use Steel Roof Anchor (ANSI)

### DESIGN

- An ideal Anchorage device to be fixed on wooden beams used in roofing.
- Consists of two Steel Flaps each having 8 holes which can be fitted on the two sides of a wooden beam by means of nails inserted in the holes.
- The  $\text{Ø}1.0''$  (25.4mm) hole can be safely used as an Anchor point.

### MATERIAL

Galvanized Steel

### FINISH

Zinc plated yellow

### MINIMUM BREAKING STRENGTH



5000 lbs. (2268 kg)

### WEIGHT

0.93 lbs.  $\pm$  0.02 lbs. (422 gm  $\pm$  10 gm)

### RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.18-2017

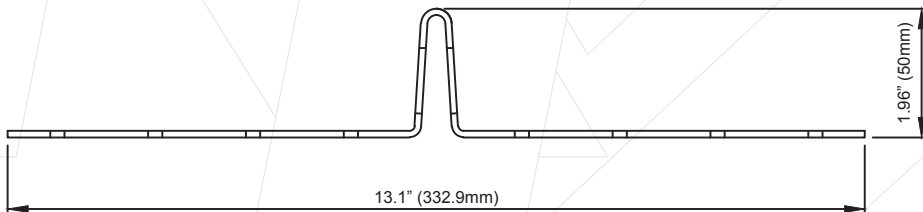

Meets or Exceeds ANSI Z359.18-2017