

## KStrong® 6 ft. Elasticated design shock absorbing lanyard with snap hooks (ANSI)

Model: UFL206101

KStrong® 6 ft. Elasticated (stretches from 4.5 ft. to 6 ft.) design shock absorbing lanyard with two (2) snap hooks (ANSI)

### DESIGN

• 1.57 in. (40mm) wide polyester tubular elasticated webbing incorporated with energy absorbing 6 ft. length. Poy Webbing on both sides with textile loops equipped with Steel Stamped Snap Hook (PN 146).

### WEBBING

Material: Polyester.  
Width: 1.57" ± 0.04" (40mm ± 1mm)  
Breaking strength: 6000 lbs. (2722 kg) - (Min.)

### STITCHING THREAD

Material: High-tenacity polyester

### METAL COMPONENT



Material: Alloy steel  
Plating: Zinc plated  
Finish: Shot blasted  
Breaking Strength: 5000 lbs. (2268kg)

### WEIGHT

2.64 lbs. ± 0.02 lbs. (1200 gm ± 10 gm)

### RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.13-2013

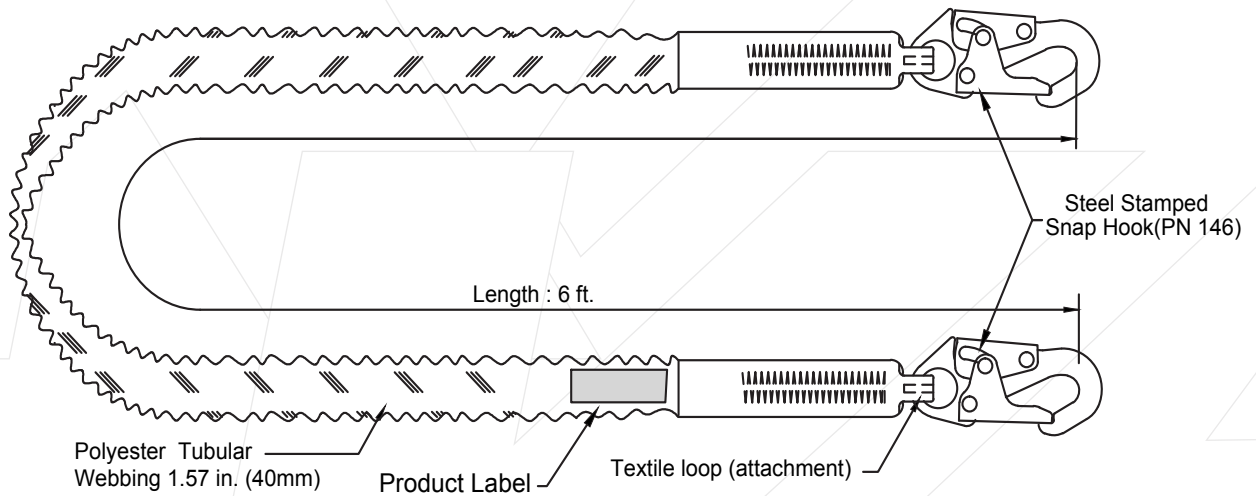

Meets or Exceeds ANSI Z359.13-2013

Length: 6 ft.