

UNIVERSAL EXTREMITY CLAMPING PLATES FOR SINGLE BEAM - 90MM TO 150MM

AFA935811(SM)

Features

- Designed to be used on I BEAM to install the horizontal lifeline.
- Compatible with Universal Extremity Plate AFF113710
- Comes with series of holes to suit different type of I-Beams sizes below:
 - 90.0 (mm)
 - 110.0 (mm)
 - 130.0 (mm)
 - 150.0 (mm)

How To Use

Refer to User Instruction Manual



SCAN TO DOWNLOAD

Metal Components

Clamping Plates	:	High Tensile Steel: ED Coated Black
Bolts	:	M10 A40/70 316 Stainless Steel
System Strength	:	23 kN

Flange Width




Minimum Flange Width Compatibility	:	90.0 mm
Maximum Flange Width Compatibility	:	150.0 mm

Weight

7.758 kg ± 0.10 kg

Relevant Standards

Conforms to EN 795:2012 Type A, TS 16415:2013 Type A

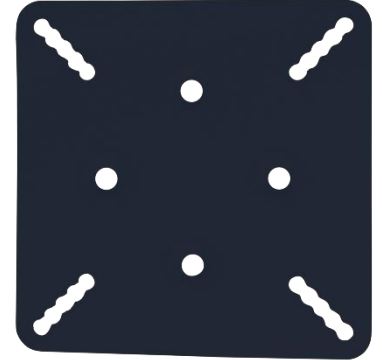

CE 0598

