

KSTRONG WRANGLER 25M 2 MAN ADJUSTABLE HORIZONTAL LIFELINE SYSTEM

AFA940012

Features

- Light Weight quick and easy to install, reusable Horizontal lifeline system
- 2 Steel O-Rings to enable the user to easily attach the Lanyard of his Harness to the Lifeline using a Connector.
- Has unique tension indicator for creating an adequate tension in the line. Once the required tension is achieved, the disc on the tension indicator rotates freely, indicating the line is ready to use.
- Has 2 Cross Arm Straps each to tie off to the structure where the anchorage is required.
- Suitable for upto 2 users

WRANGLER[™]
2-PERSON TEMPORARY HORIZONTAL LIFELINE



How To Use

Refer to User Instruction Manual



Material

Rope Line	:	16 mm Kernmantle Rope
Tensioner	:	Aluminum Alloy & Stainless Steel
O Rings	:	Forged Alloy Steel
	:	MBS 23kN
Karabiners	:	Galvanized Steel
	:	MBS 40kN
Cross Arm Strap	:	Polyester 44mm, MBS 25kN



AFA920115(1.5M)

System Strength and Span


Minimum Breaking Strength	:	25kN
Minimum Span	:	5m
Maximum Span	:	25m

Weight

8.26 kg ± 0.10 kg

Relevant Standards

EN 795:2012 Type C & TS 16415:2013 Type C

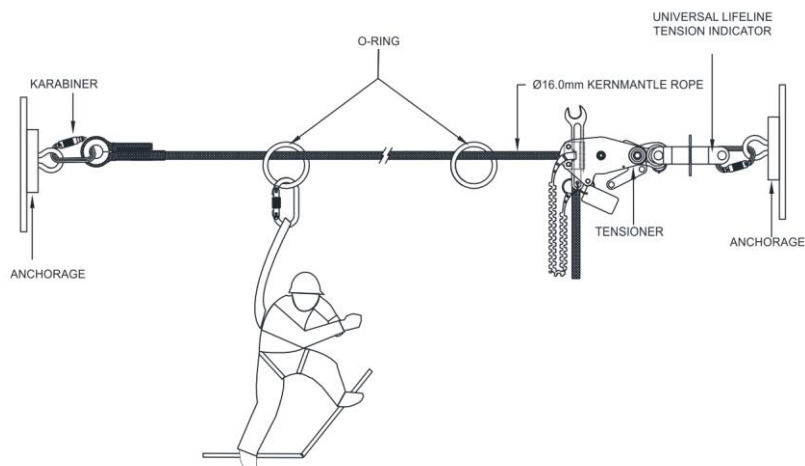

CE 0598