14MM TWISTED ROPE ANCHORAGE LINE WITH OPENABLE ADJUSTER WITH SHOCK ABSORBER 20M


Features

- This Fall Arrest system comprises of 14mm Polyamide. Twisted rope anchorage line with an openable Rope Grab made of Alloy Steel.
- AFA950201 comes with openable galvanized steel Rope Grab having a connecting eye of diameter 25mm.
- Simple opening / closing and automatic locking by a double security system.
- The Anchorage line has one side connector AFC601100 and the other side a stop knot.

<u>[]i</u>

MBS 25kn



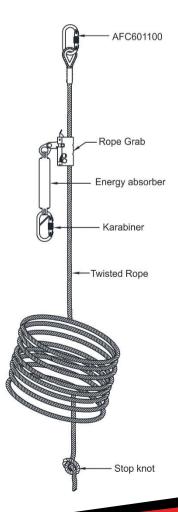

How To Use

Refer to User Instruction Manual

Material Twisted Rope : 14mm Polyamide Twisted Rope Rope Grab : Alloy Steel MBS 15kn Karabiners : Galvanised Steel

System Strength

Greater than 15 kN or 1,530 kgf

Weight

3815 gm ± 50 gm (Rope grab + Karabiner)

Relevant Standards

EN 353-2:2002

