

ELEMENT **ELECTWORX** FULL BODY HARNESS SERIES

KStrong **ElectWorX** harnesses have been designed with **Non Conductive Fittings** allowing use where there are possible **electrical hazards**.

AFH300706



AFH300707



Ideally used in **Utilities**, overhead Line teams on live wires protecting the user from **Electrical discharge**.

ELEMENT **ELECTWORX** FULL BODY HARNESS SERIES

HARNESS CODES

AFH300706	AFH300707
-----------	-----------

FEATURES

	1.9kg	2.243kg
Harness Weight	1.9kg	2.243kg
Front D Ring Fall Arrest		
Rear D Ring Fall Arrest	✓	✓
Front Fall Arrest Loops	✓	✓
Dielectric Fittings 14kV (Non Conductive)	✓	✓
Stainless Steel Fittings		
Flame Retardent Webbing		
Anti Static Webbing		
Endure Webbing (Oil & Water Repelant)		
Elasticated Shoulder Straps	✓	✓
Rear Extension Strap		
Rescue Loops		
Padded Waist Belt with Side D Rings & Tool Loops		✓
Rear Sit Strap	✓	✓
Fall Arrest Indicator Tags	✓	✓
Label / Instruction Pouch	✓	✓
Compass Asset Technology	✓	✓
USER WEIGHT LIMIT		
Refer to Energy Absorbing Lanyards & Fall Arrest Blocks data for maximum usage	140kg	140kg
RELEVANT STANDARDS		
EN 361:2002	✓	✓
EN 358:2018		✓
EN ISO 9150:1988		
ATEX 2014/34/EU		
EN 1149-1:2006 & EN 1149-5:2008		
EN ISO 80079-36:2016 & EN ISO 80079-37:2016		
EN ISO 15025:2002		

HARNESS CODES

AFH300706	AFH300707
-----------	-----------

SUITABLE FOR

	AFH300706	AFH300707
Construction	✓	✓
Maintenance	✓	✓
Fall Arrest	✓	✓
Ladder Safety Systems	✓	✓
Roof Work	✓	✓
Elevated Work Platforms		
Confined Space Entry		
Tower / Pole Work		✓
Welding / Hot Works		
Wet & Corrosive Environments		
Offshore		
Explosive Environments	✓	✓
Electrical	✓	✓


ELEMENT **ELECTWORX**

FULL BODY HARNESS SERIES

MATERIAL SPECIFICATION

WEBBING	THREAD / STITCHING	METAL COMPONENTS	WEBBING KEEPERS	WEB ENDS	PADDING
Polyester 44 mm wide MBS 25 kN	High Tenacity Polyester (Colour Contrasted)	Buckle & Frame – Alloy Steel core with reinforced material (14kV Dielectric) (MBS-15 kN) D-Ring – Alloy Steel core with reinforced material (14kV Dielectric) (MBS-23 kN) Finish – PVC Coated Black	Elastic Loops provided for webbings	Stitched with Web holders	Comfort Pad Made Up Of Air Mesh, Insushield & Matty

Harness Sizing Chart

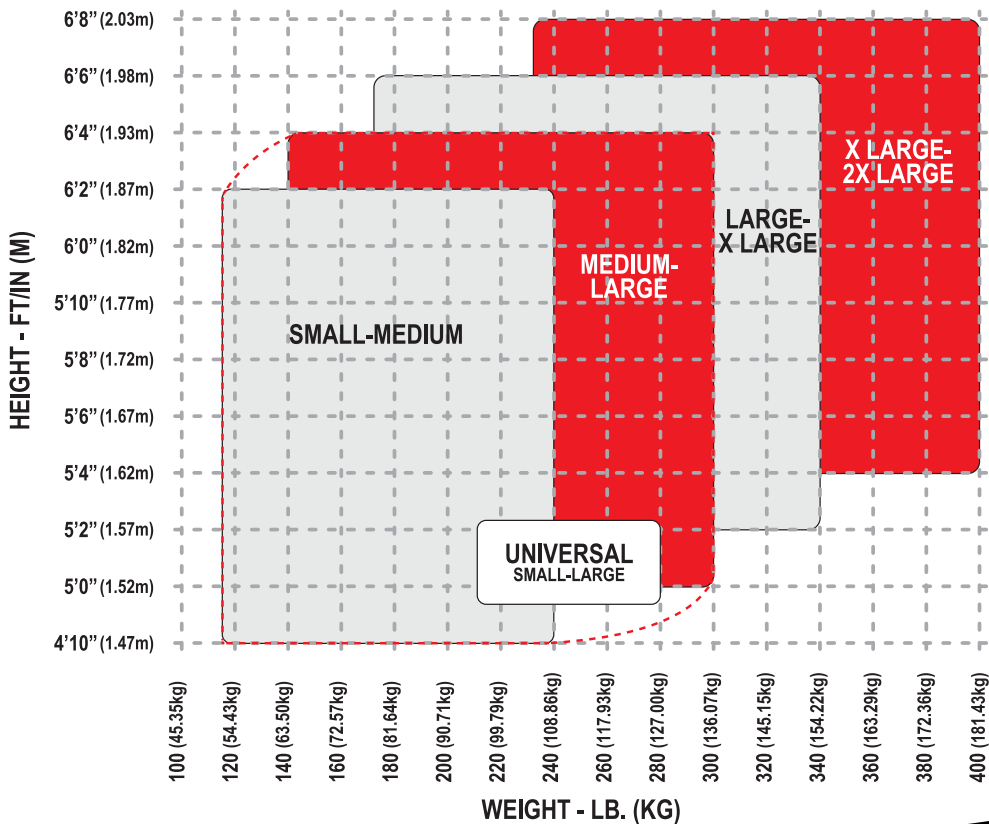

ELEMENT ELECTWORX FULL BODY HARNESS SERIES

AFH3000706
& AFH300707

KStrong ElectWorX harnesses have been designed with Non Conductive Fittings allowing use where there are possible electrical hazards. Ideally used in Utilities, overhead Line teams on live wires protecting the user from Electrical discharge.

FEATURES

- Rear D Ring Fall Arrest
- Front Fall Arrest Loops
- Dielectric Fittings 14kV (Non Conductive)
- Elasticated Shoulder Straps
- Rear Sit Strap
- Fall Arrest Indicator Tags
- Label / Instruction Pouch
- Compass Asset Technology

HOW TO USE

Refer to User Instruction Manual



SCAN TO DOWNLOAD

MATERIAL COMPONENTS

Webbing:	44mm Polyester, MBS 25 kN
Fittings:	14kV Steel core with Reinforced Polymer, Black Molded, MBS 23kN
Webbing Keepers:	Elasticated Polyester
Lanyard Keepers:	Polyethylene
Rear ID plate:	Polyethylene
Padding:	Mesh Insushield & Matty

USER WEIGHT LIMIT

140 kg

WEIGHT

AFH300706 : 1.9kg

AFH300707 : 2.243kg

RELEVANT STANDARDS

EN 361:2002

EN 358:2018

AFH300706



AFH300707

