


MICRON™ SERIES

AFS550002 &
AFS550002D

KStrong Micron SRL has been designed to use as a fall arrest block and energy absorbing lanyard. It can be attached at foot level allowing it to be used both vertically and horizontally, ensuring the user's safety whilst working close to an edge. It is robust, durable and the lightest in its range.

Features

- Light Weight
- 360 Degree Swivel top
- High Impact Load bearing polymer casing
- Length: 2m
- Inbuilt textile Energy Absorber for shock absorption
- Aluminum Swivel Hook with Fall Indicator.
- Minimum Breaking Strength >15kN.
- Used Horizontally.
- Used at Foot level –
 - Rated to Fall Factor 2
- Ease of connecting the user's lanyard to the HLL using a karabiner.
- Sharp Edge Rated (R>0.5mm).
- Can be attached to all harnesses and used with one or two units - refer attachments AFC609100 & AFC609101.
- Temperature Range -30 to +50 deg.
- QR Code for ease of identification.
- Can be supplied with a range of different hook options on request.

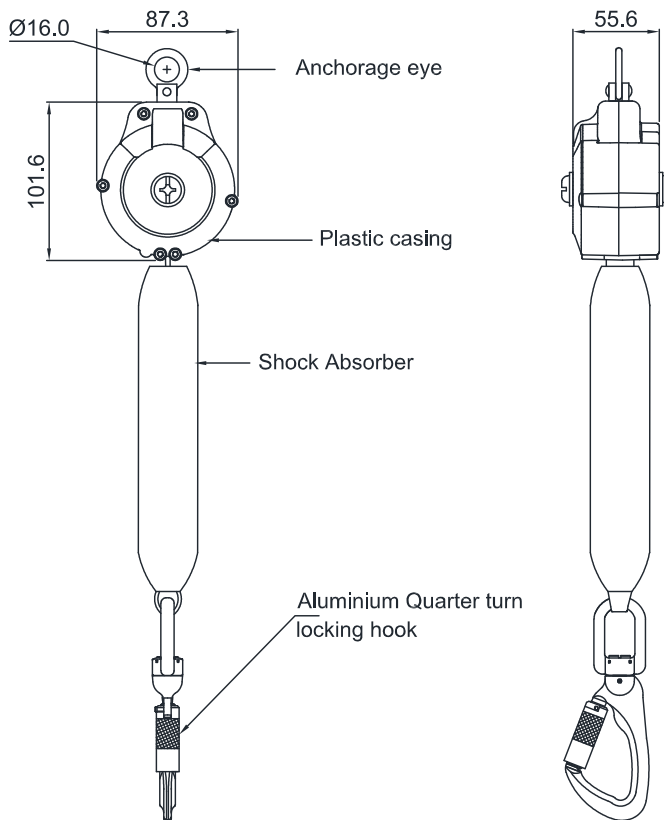

AFC609100



AFC609101



Load Capacity

140Kg Vertical
100Kg Horizontally

Material

Webbing	:	Technocrat 21mm Wide MBS 20kn
Casing	:	Polymer
Shock Absorber	:	Polyester webbing
Metal Components	:	Aluminum Hook MBS 23kN

Weight

862.5 gm ± 20 gm

HowToUse

Refer to User Instruction Manual



SCAN TO KNOW MORE

Relevant Standards

EN 360:2002, VG11 RFU # 11.060