

DOUBLE TANDEM PULLEY WITH SS SHEAVES

AFX206009

Features

- Lightest, Fastest, Versatile double tandem pulley on ball bearing.
- Pulley is large enough to accommodate rope up to 12 mm diameter.
- Attachment Point can accommodate a connector up to 20 mm diameter.

How To Use

Refer to User Instruction Manual



Metal Components

Material	:	Aluminum Alloy (Side Cover) Stainless Steel (Sheaves)
Finish	:	Colored / Anodized (Side Cover) Polished (Sheaves)
Minimum Breaking Strength	:	40 kN




Weight

323 gm ± 20 gm

Relevant Standards

EN 795:2012 TYPE B & EN 12278:2007

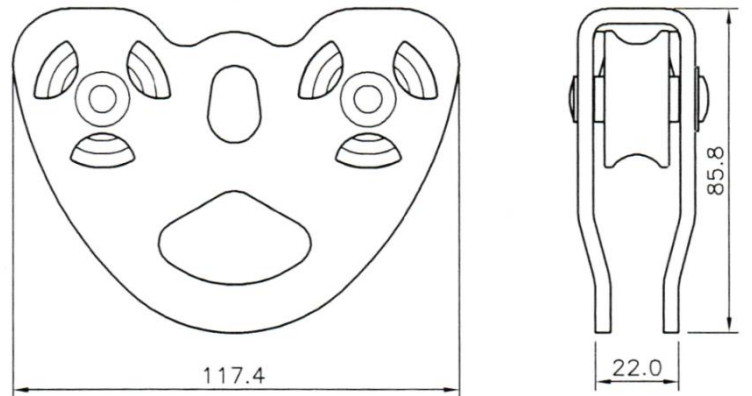

CE 0598

EN 80079-36:2016
EN 80079-37:2016



II 2G E_x h II_c T6 G_b