

KStrong® 6 ft. Micron™ SRL with rebar hook (ANSI)

Model: UFS354002

MICRON™

SRL SERIES

KStrong® 6 ft. Micron™ Lightweight SRL with one (1) rebar hook at anchor end (ANSI)

PHYSICAL PARAMETERS

- Lightest available SRL in it's range/class.
- Robust & durable plastic casing.
- Technora Webbing with Energy absorber.
- Stamped steel scaffold hook at Attachment end (Our ref. PN167)

LENGTH

6 ft.

WEBBING


Material: Technora Webbing 0.827" (21mm)
Min. Breaking strength: 4500 lbs.

WEIGHT

4.30 lbs. ± 0.22 lbs. (1950 gm ± 100 gm)

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.14-2014 CLASS A

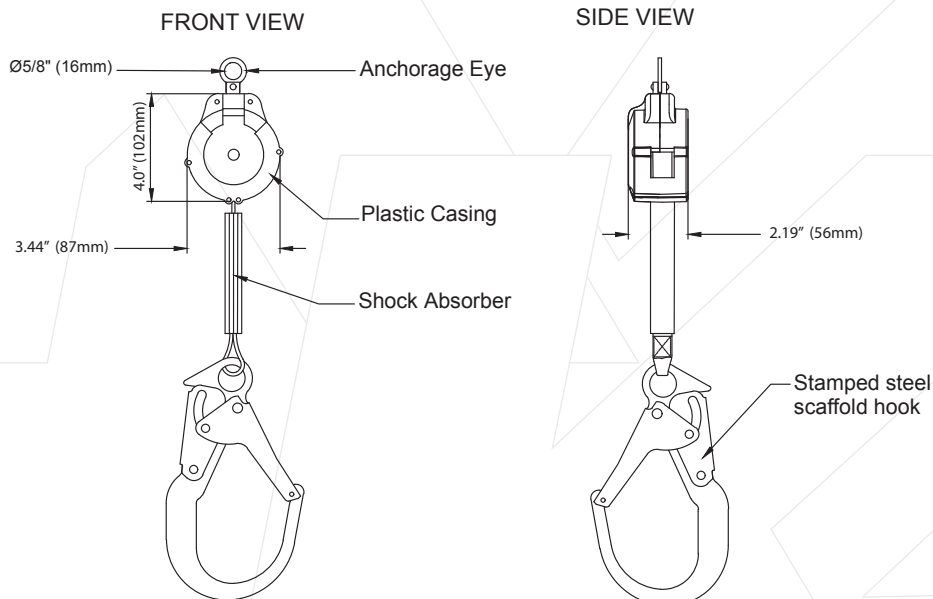

Meets or Exceeds ANSI Z359.14-2014 CLASS A