

KStrong® Dual 9 ft. Micron™ SRL Assembly with Tie-Back Hooks (ANSI). Includes connector to attach to harness.

Model: UFS359002D

MICRON™

SRL SERIES

KStrong® Dual 9 ft. Micron™ lightweight SRL assembly with one (1) Tie-Back hook and a 3 ft. protective sleeve at each anchor end (ANSI). Includes one (1) connector (UFC409151) to attach to harness.

PHYSICAL PARAMETERS

- Lightest available SRL in it's range/class.
- Robust & durable plastic casing.
- Technora Webbing with Energy absorber.
- Twin SRL connector (UFC409151) for connection to harness and Swivel steel snap hook at bottom ends.

LENGTH

9 ft. (6 ft. internal, 3 ft. external)

WEBBING

Material: Technora Webbing 0.827" (21mm)
Min. Breaking strength: 4500 lbs.

WEIGHT


8.10 lbs. ± 0.22 lbs. (3674 gm ± 100 gm)

RELEVANT STANDARDS


Meets or Exceeds ANSI Z359.14-2014 Class A



FRONT VIEW

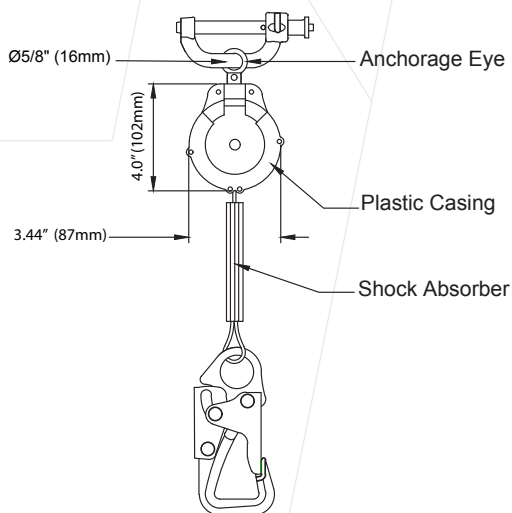

SIDE VIEW

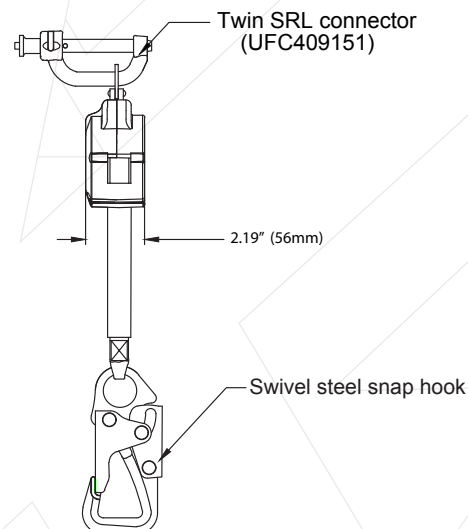

Meets or Exceeds ANSI Z359.14-2014 CLASS A