

KStrong® Removable Steel Girder Anchor (ANSI)

Model: UFA30080

DESIGN

- Girder steel anchor is a removable/reusable anchor to be mounted on solid steel structures, girders and steel I-beams.
- Can be installed very easily with one hand only.
- Maximum thickness of the structure on which installation is possible is 1.57" (40mm).

USAGE

For use as an anchorage point for fall protection equipment

MATERIAL

Eye Nut & Main Body: Alloy steel | Outer Body: Stainless Steel with Molded Polymer

RECOMMENDED BOLT HOLE SIZE

0.80" (21mm) to 1.18" (30mm)

STATIC STRENGTH


Greater than 5000 lbs. (2268 kg)

WEIGHT

1.21 lb ± 0.02 lb (550 gm. ±10gm).

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.18-2017 Type A

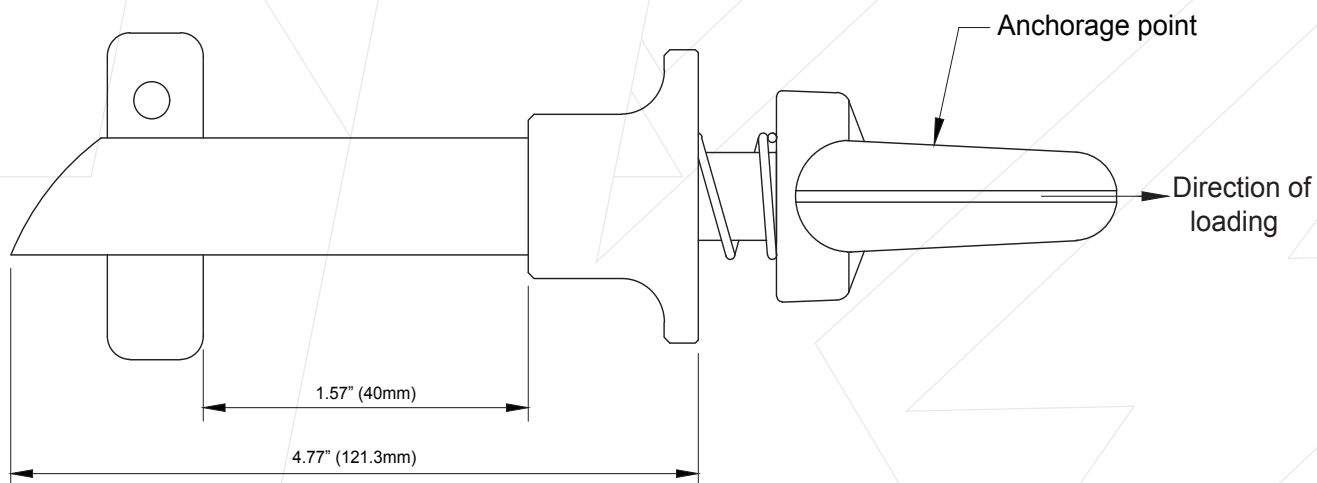

Meets or Exceeds ANSI Z359.18-2017 Type A