

KStrong® 6 ft. Tie-back SAL with Sliding D-ring, Snap Hook and Tie-back Hook (ANSI)

Model: UFL201402

KStrong® 6 ft. Tie-back shock absorbing lanyard with sliding d-ring, snap hook and tie-back hook (ANSI)

DESIGN

- Single leg lanyard incorporated with Energy absorber(PN 500)
- Steel snap hook PN 146 at attachment end & Steel snap hook PN 148 at anchorage end
- Equipped with adjustable D-Ring

WEBBING

Material: Polyester
Width: 1.18 in. \pm 0.04 in. (30mm \pm 1mm)
Breaking Strength: 6000 lbs. (2722kg)

STITCHING THREAD

Material: High-tenacity polyester

METAL COMPONENT


Material: Alloy steel
Finish: Silver or Golden Yellow Galvanized
Breaking Strength: 5000 lbs. (2268kg)

WEIGHT

3.26 lbs. \pm 0.02 lbs. (1480 gm \pm 10 gm)

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.13-2013

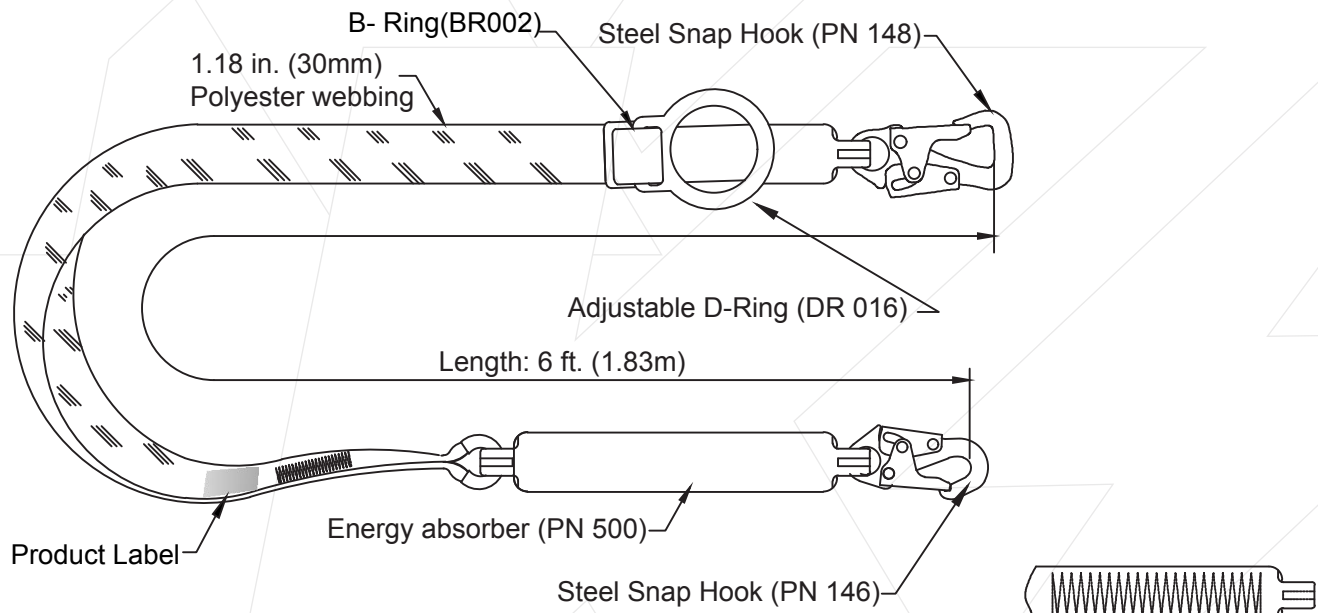

Meets or Exceeds ANSI Z359.13-2013

Stitching Pattern