

## KStrong® Choker Style Anchor Strap with Wear Pad

KStrong® Choker "Pass Thru" Style Anchor Strap with Wear Pad. One large D-ring and one small D-ring with 3" wear pad. Variable Lengths (ANSI).

### DESIGN

50 mm (1.96") Polyester Webbing.

### WEBBING

Material: High-tenacity polyester.  
 Width: 50 ±1 mm. (1.96" ± 0.04")  
 Breaking strength: 5000 lbs. (2268kg) -Min.


### STITCHING THREAD

Material: High-tenacity polyester.

### RELEVANT STANDARDS


Meets or Exceeds ANSI Z359.18-2017

MODEL	LENGTH	WEIGHT
UFA20003	3 ft. (0.91m)	0.57 lbs. ± 0.02 lbs. (259 gm ±10 gm)
UFA20004	4 ft. (1.22m)	0.76 lbs. ± 0.02 lbs. (345 gm ±10 gm)
UFA20006	6 ft. (1.83m)	1.44 lbs. ± 0.02 lbs. (653 gm ±10 gm)
UFA20010	10 ft. (3.05m)	2.21 lbs. ± 0.02 lbs. (1002 gm ±10 gm)
UFA20016	16 ft. (4.88m)	2.87 lbs. ± 0.02 lbs. (1302 gm ±10 gm)
UFA20024	24 ft. (7.32m)	3.97 lbs. ± 0.02 lbs. (1801 gm ±10 gm)
UFA20030	30 ft. (9.14m)	4.85 lbs. ± 0.02 lbs. (2200 gm ±10 gm)

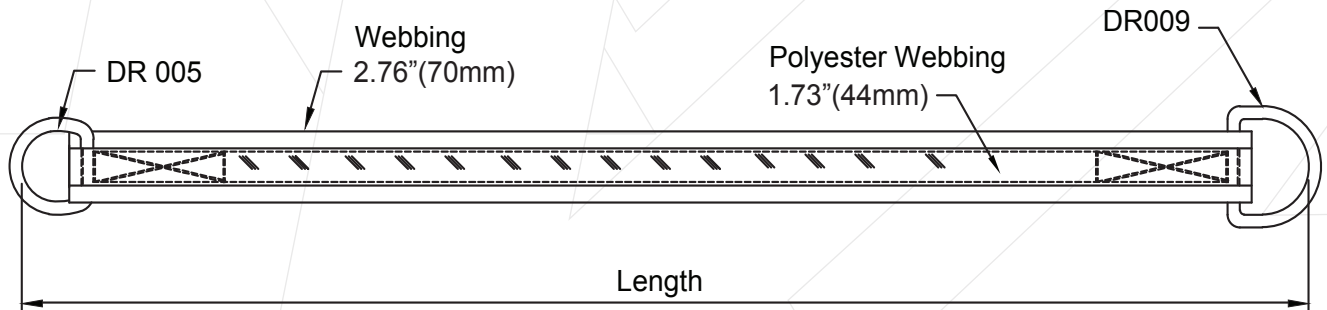

Available Lengths: 3', 4', 6', 10', 16', 24', 30'

Meets or Exceeds ANSI Z359.18-2017



Stitching Pattern