

KStrong® Concrete Embed Anchor Strap with Loop and D-ring - Variable Lengths (ANSI)

KStrong® Concrete Embed Anchor Strap with loop, d-ring and sleeve (ANSI)

MODEL	LENGTH	WEIGHT
UFA20504	4 ft.	0.62 lbs. ± 0.02 lbs. (281 gm ± 10 gm)
UFA20506	6 ft.	0.91 lbs. ± 0.02 lbs. (413 gm ± 10 gm)

DESIGN

- Made up of 1.73 in. (44mm) wide polyester webbing.
- 2.04 in. (52mm) tubular webbing.
- One side textile loop and D-Ring at other end.

WEBBING

Material: Polyester
Breaking Strength: 5000 lbs. (Min.)
Width: 1.73 in. (44 mm) + 0.03 in. (1 mm)

STITCHING THREAD


High Tenacity Polyester

D-RING (DR-002)


Material: Alloy steel
Breaking Strength: 5000 lbs. (Min.)
Finish: Golden Yellow Galvanized

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.18-2017 TYPE T

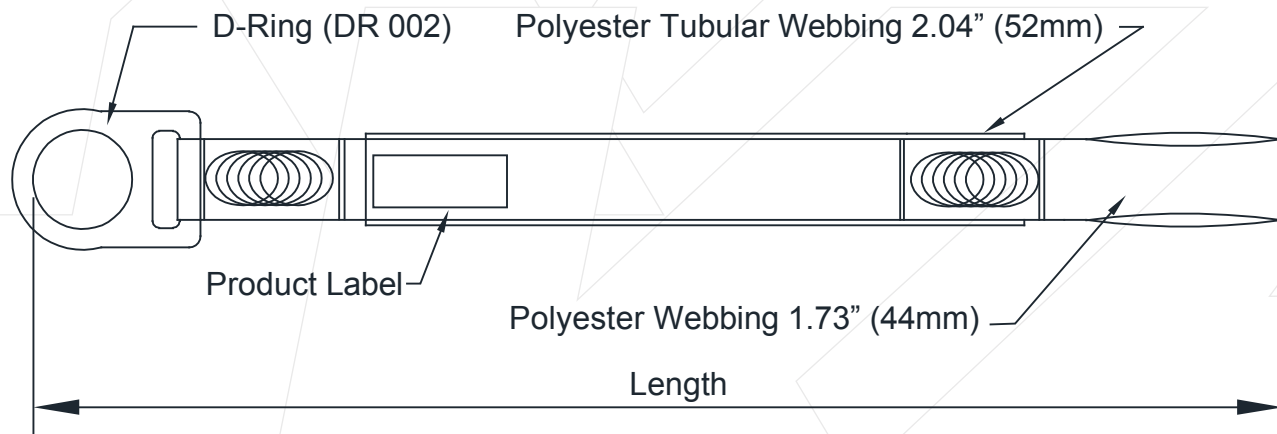

Meets or Exceeds ANSI Z359.18-2017 TYPE T



Stitching Pattern