

KStrong® FR Choker Style Anchor Strap with Loop and D-ring (ANSI)

KStrong® Flame Retardant (FR) Choker Style Anchor Sling with one d-ring, other end with loop (ANSI)

DESIGN

1.73" FR Webbing

WEBBING

Material: Flame Retardant (FR) Treated Webbing (260°C/500°F to Melt)
 Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)
 Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: Kevlar


D-RING

Material: Alloy Steel
 Finish: Blue or Silver Galvanized
 Breaking Strength: 5000 lbs.

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.18-2017 TYPE T

| MODEL | LENGTH | WEIGHT |
|--------------|--------|---|
| UFA20602(FR) | 2ft. | 1.10 lbs. ± 0.02 lbs. (498 gm ± 10 gm) |
| UFA20603(FR) | 3ft. | 1.76 lbs. ± 0.02 lbs. (798 gm ± 10 gm) |
| UFA20604(FR) | 4ft. | 1.98 lbs. ± 0.02 lbs. (898 gm ± 10 gm) |

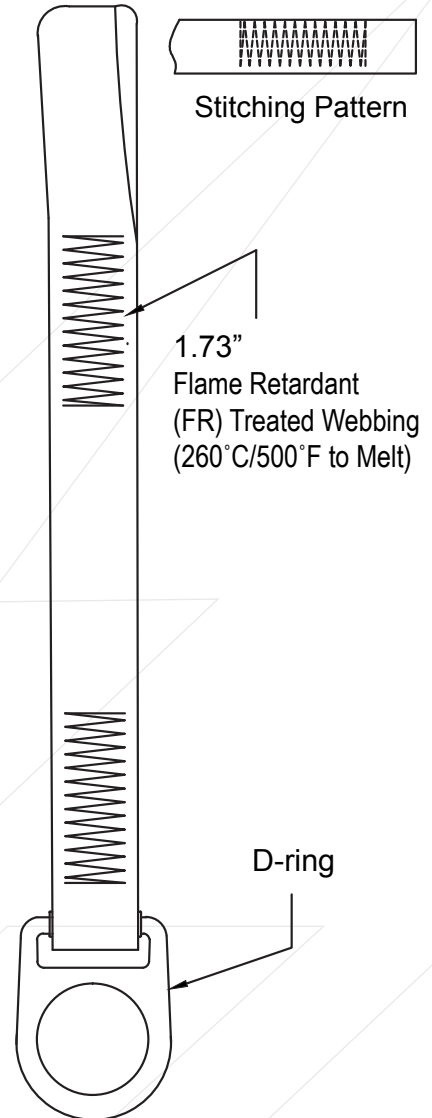

Batch #: _____ Serial #: _____
 Date of First Use: _____