

## KStrong® Single Use Steel Roof Anchor, Raised (ANSI)

Model: UFA30015

KStrong® Single use steel roof anchor, raised (ANSI).

### DESIGN

- An ideal Anchorage device to be fixed on wooden beams used in roofing.
- The Ø1" (25.4mm) hole can be safely used as an Anchor point.

### MATERIAL

Galvanized Steel.

### FINISH

Zinc Plated Yellow.

### MINIMUM BREAKING STRENGTH



5000 lbs. (2268 kg)

### WEIGHT

1.31 lbs. ± 0.02 lbs. (594 gm ± 10 gm)

### RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.18-2017 Type A

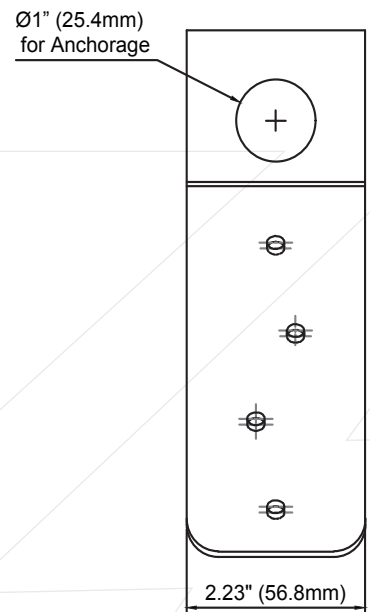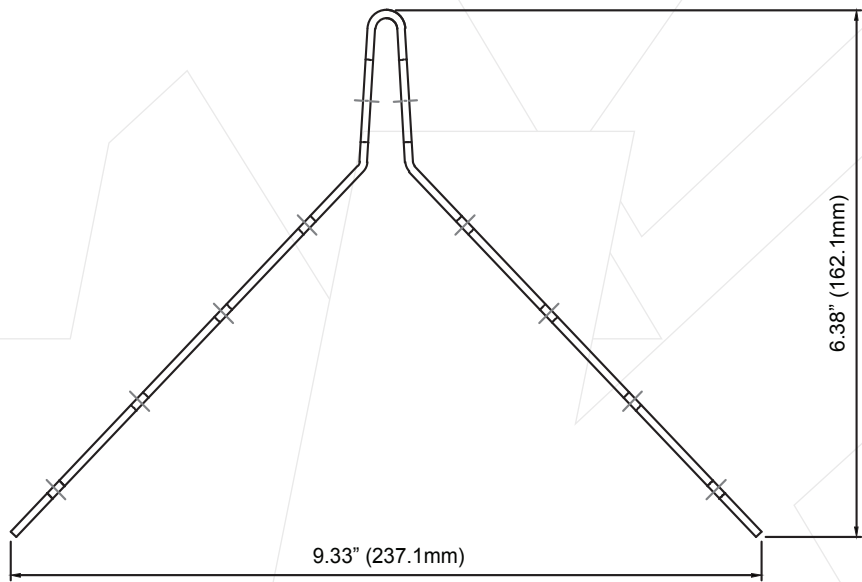

Meets or Exceeds ANSI Z359.18-2017 Type A & EN 795:2012