

KStrong® 3/4" Removable Bolt Anchor for Concrete (ANSI)

Model: UFA30090

KStrong® 3/4" Removable Bolt Anchor is a versatile, reusable anchorage connector designed for robust fall protection. Featuring a reinforced steel thimble, this anchor is engineered for quick, single-handed installation into concrete structures, providing a secure and reliable tie-off point for fall arrest, restraint, and work positioning applications.

KEY DESIGN FEATURES

- **Application:** Capable of being installed on a concrete wall having a minimum thickness of 5.90 inches.
- **Hole Requirement:** Installs easily through a pre-defined hole of 0.74 inches (approx. 3/4") in diameter.
- **Ease of Use:** Designed to be easy to install on a concrete structure using a single hand.
- **Connection Point:** Integrated steel thimble protects the cable eye from wear and tear.

MATERIAL

Cable: Galvanized Steel Ø1/4 inch.
Clamping Jaws: Stainless Steel

MINIMUM BREAKING STRENGTH


5000 lbs. (2268 kg)

WEIGHT

0.634 lbs. ± 0.011 lbs. (287 gm ± 5 gm)

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.18-2017 Type A

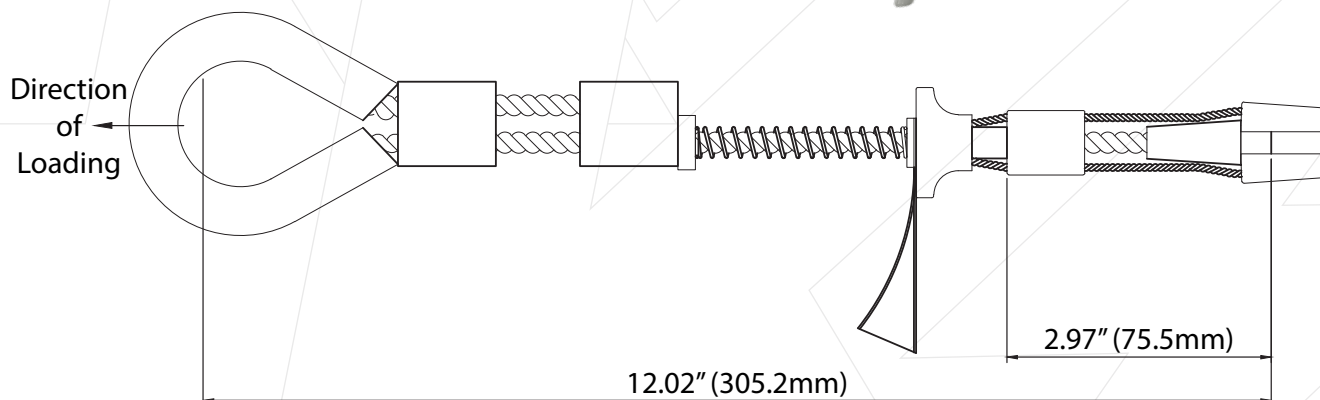

Batch #: _____ Serial #: _____
Date of First Use: _____