KStrong® Aluminum Sliding Beam Anchor, Adjustable 3” - 6” (ANSI)

Model: UFA30115

KStrong® Rolling Beam Anchor Trolley, Adjustable to fit I-beams with flange widths ranging from 3” to 6”. (ANSI)

DESIGN

Anchor capable of being installed on flange of beams. Adjustment of the jaw to variable positions enables it to be installed to varying flange widths.

MIN FLANGE WIDTH INSTALLATION

2.92” (74mm)

MAX FLANGE WIDTH INSTALLATION

5.90” (150mm)

MATERIAL

Aluminum Alloy & Brass

SYSTEM STRENGTH

Greater than 23 kN (5000 lbs.)

WEIGHT

3.43 lbs. ± 0.22 lbs. (1556 gm ±100 gm)

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.18-2017 Type A

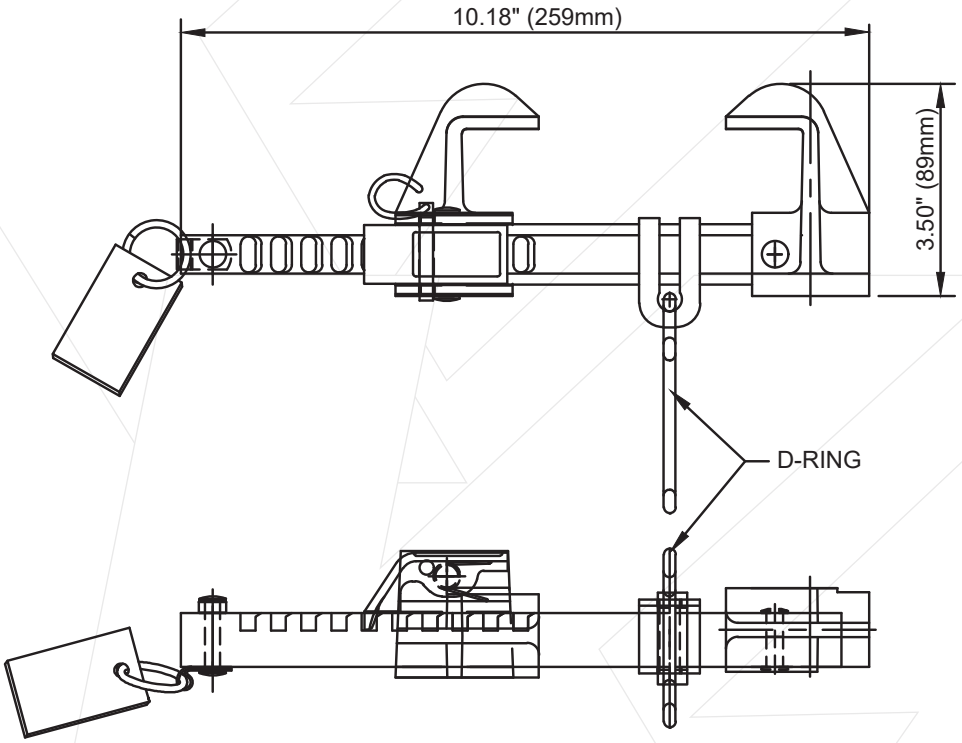

Batch #: _____ Serial #: _____

Date of First Use: _____