

KStrong® IMPACT™ Low Profile Extremity (Start/Stop) Energy Absorbing Anchor Post Assembly for Built-Up / Membrane TPO Roof Deck with 12" Toggle Bolts

Model: UFA55111TG12

DESIGN

- The anchor post (extremity) is designed to be fixed to Built-Up / Membrane TPO roofs
- It is installed on Built-Up / Membrane TPO roofs using a set of four toggle anchors
- It is compatible with a 8.74" x 8.74" (222mm x 222mm) pitch on Built-Up / Membrane TPO roofs

MATERIAL

Stainless Steel

FINISH

ED Coated Black / Powder Coated Black

MINIMUM BREAKING STRENGTH


15 kN.

WEIGHT

6.99 lbs. ± 0.04 lbs. (3.17 kg ± 0.02 kg.)

RELEVANT STANDARDS

Meets or Exceeds EN795 : 2012 Type A , AS/NZS 5532:2013 & TS 16415:2013 Type A

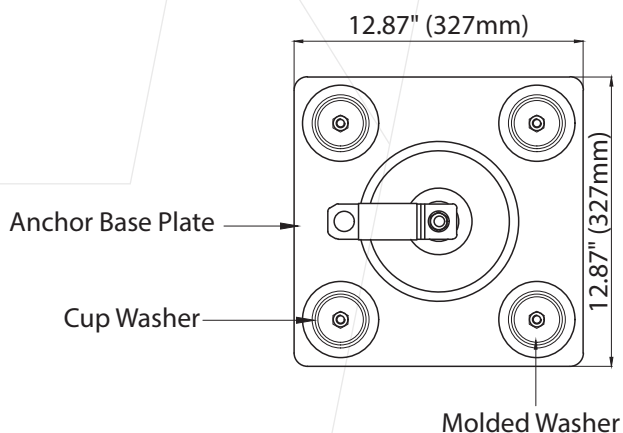

Z-Shape Anchor Plate With
Heat Shrink Tube Assembly

Set Of 4 Toggle Bolts
(11.81" or 300mm)

