

KStrong® Snap Hook, Stamped (ANSI)

Model: UFC404150

KStrong® Stamped steel snap hook.

DESIGN

- Gate opening 0.79" (20mm).
- Stamped out of alloy steel.
- Auto closing & auto locking type steel snap hook.
- Locking by spring operated attachments.

MATERIAL

Material: Alloy Steel

FINISH

Galvanized with Golden Yellow / Silver passivation.

MINIMUM BREAKING STRENGTH

5000 lbs. (2268kg)

GATE FACE STRENGTH

3600 lbs. (1633kg)

GATE SIDE STRENGTH

3600 lbs. (1633kg); Minor Axis: 3600 lbs. (1633kg)

WEIGHT


0.83 lbs. ± 0.02 lbs. (376 gm. ± 10 gm)

RELEVANT STANDARDS


Meets or Exceeds ANSI Z359.12-2009 & CSA Z259.12



CLOSED CONDITION

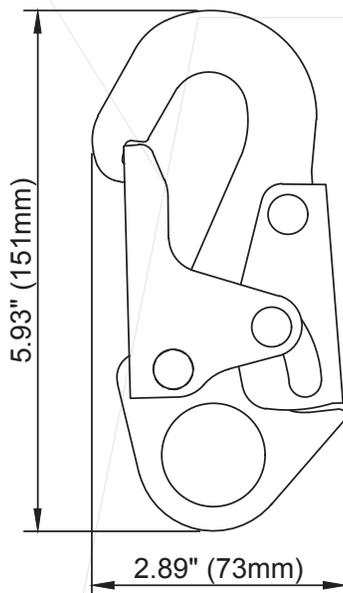

OPEN CONDITION

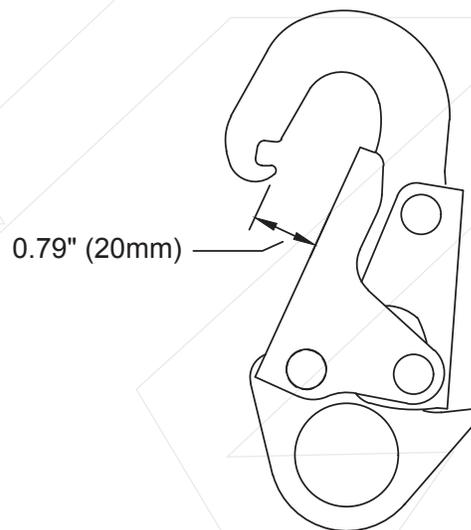

Meets or Exceeds ANSI Z359.12-2009 & CSA Z259.12