

KStrong® IMPACT™ Removable Shuttle (Column / Wall and Roof Mount HLL Systems ONLY)

Model: UFF119300

DESIGN

- The openable stainless steel carriage body is used to secure the user's shock-absorbing Lanyard/Retractable Block to the lifeline. Its design ensures it moves seamlessly and without interruption along the entire horizontal line.

MATERIAL

Stainless Steel - 316

FINISH

Electropolished / E Coated

VITAL TEST COMPLIANCE



Static Strength: 15 kN for 3 Minutes

WEIGHT

0.46 lbs. ± 0.04 lbs. (212gm ± 10gm)

RELEVANT STANDARDS

Meets or Exceeds EN 795 : 2012 Type B

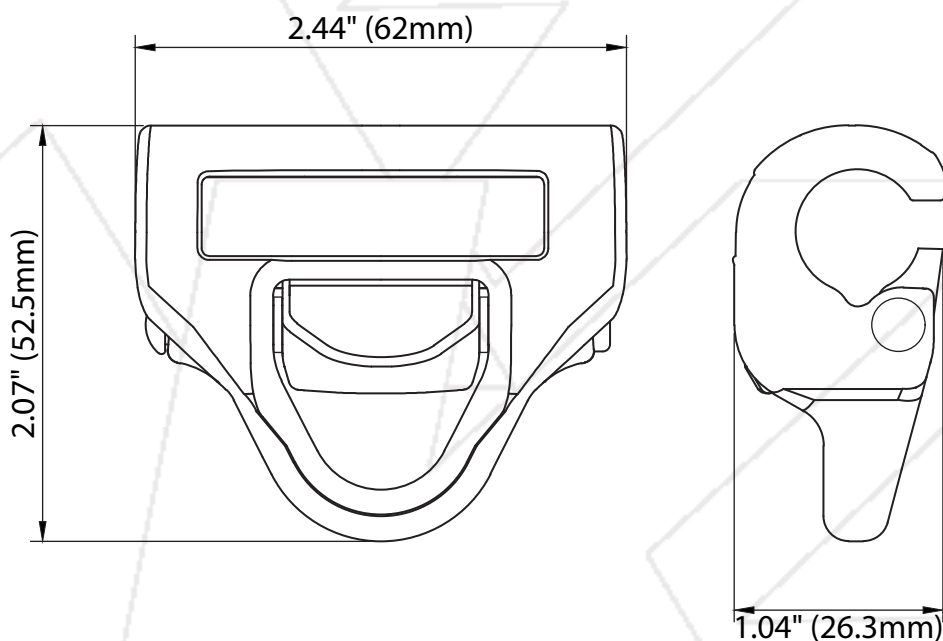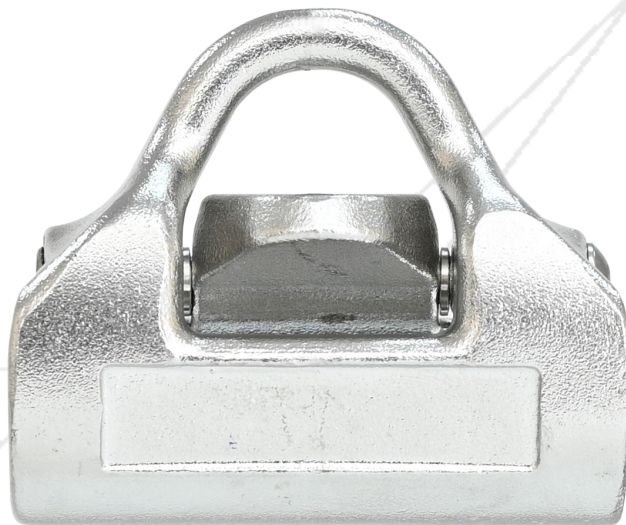

Batch #: _____ Serial #: _____
Date of First Use: _____