

# KStrong® IMPACT™ Removable Shuttle (Ceiling Mount HLL Systems ONLY)

Model: UFF119400

## DESIGN

- Openable wheel type carriage body designed for use with Ø0.31" (8mm) wire rope overhead lifelines.
- Compatible with a shock absorbing lanyard or a retractable block.
- Ensures smooth movement over the entire length of the lifeline, including intermediates and corners.
- Includes a load indicator to show if a fall has been arrested.
- Sheaves are mounted on ball bearings for smooth operation.
- Conforms to EN795:2012 Type C & TS16415:2013 when used as part of the horizontal life line fall protection system.

## MATERIAL

SS-316 (Stainless Steel)

## FINISH

Electropolished / E Coated

## STATIC STRENGTH




15 kN for 3 Minutes

## WEIGHT

3.13 lbs. ± 0.02 lbs. (1.42kg ± 0.01kg)

## RELEVANT STANDARDS

Meets or Exceeds EN 795 : 2012 Type B & CEN/TS 16415 : 2013 Type B

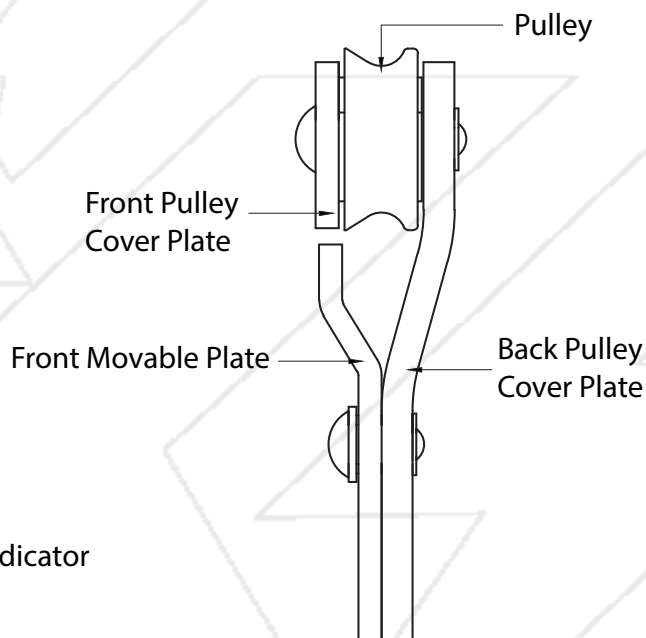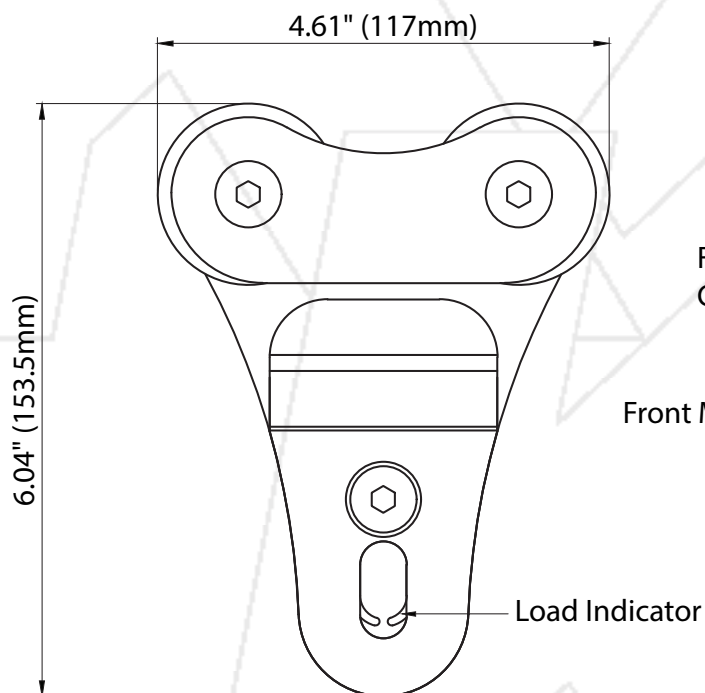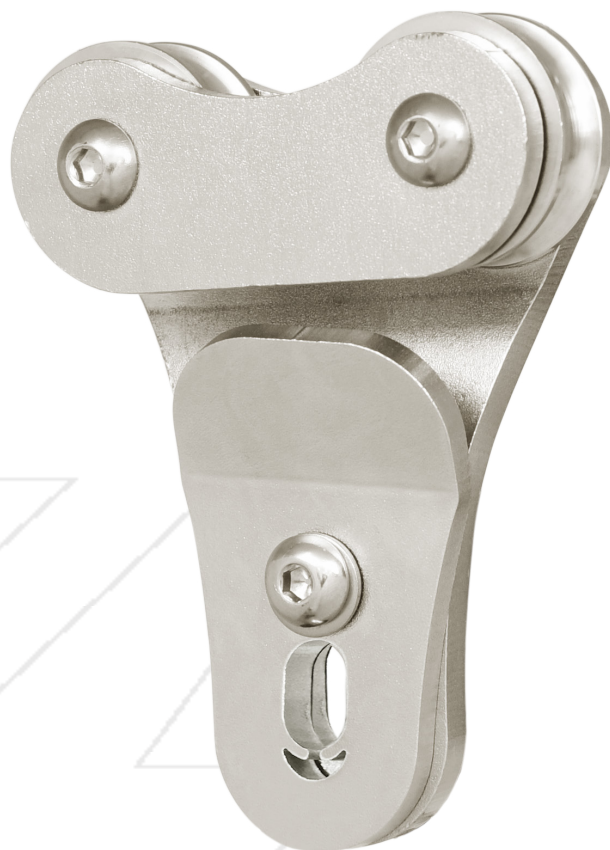

Batch #: \_\_\_\_\_ Serial #: \_\_\_\_\_  
Date of First Use: \_\_\_\_\_