

KStrong® Kapture™ Epic 5-Point Full Body Harness, Padded, 3 D-Rings, QC Chest and Legs (ANSI)

MODEL	SIZE	WEIGHT
UFH10331P(S-L)	Small to Large	6.08 lbs. ± 0.02 lbs. (2758 gm ± 10 gm)
UFH10331P(L-XL)	Large to X-Large	6.21 lbs. ± 0.02 lbs. (2817 gm ± 10 gm)

KStrong® Kapture™ Elite 5-Point Adjust Full Body Harness with 6" Comfort Waist Pad, Removable Tool Belt, Shoulder Padding, One (1) Back D-Ring, Two (2) Side D-Rings, Quick Connect Chest and Leg Closures (ANSI)

DESIGN

- One dorsal attachment D-ring for fall arrest.
- Adjustable Shoulder straps.
- Adjustable leg straps.
- Equipped with work positioning belt.

WEBBING

Material: Polyester
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)
Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: High-tenacity polyester

METAL COMPONENT


Material: Alloy Steel
Finish: Silver or Golden Yellow Galvanized

CAPACITY RANGE

ANSI: 130 - 310 lbs.; OSHA: 420 lbs.

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2014

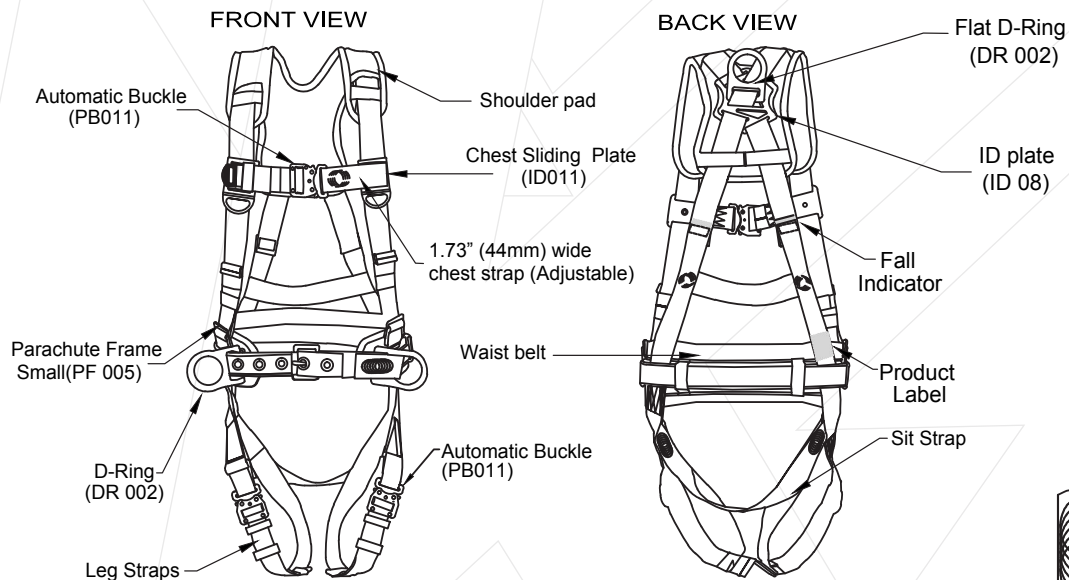

Meets or Exceeds ANSI Z359.11-2014



STITCHING DESIGN