CAPTURE[®] ELÉMENT

LV4 FULL BODY HARNESS

KStrong[®] Kapture[™] Element 5-Point Full Body Harness with Revolta[™] Oil and Water **Repellent Webbing, 1 Enhanced** Dorsal D-ring Plus™, Back/ Shoulder Pad, Trauma Relief Straps, QC Chest and Legs (ANSI)

Mode	l: L	IFH1	08020

MODEL	SIZE	WEIGHT
UFH10802Q(S-M)	Small to Medium	$3.68 \text{ lbs.} \pm 0.02 \text{ lbs.}$ (1670 gm ±10 gm)
UFH10802Q(M-L)	Medium to Large	$3.79 \text{ lbs.} \pm 0.02 \text{ lbs.}$ (1720 gm ±10 gm)
UFH10802Q(L-XL)	Large to X-Large	$3.90 \text{ lbs.} \pm 0.02 \text{ lbs.}$ (1770 gm ±10 gm)
UFH10802Q(XL-2XL)	X-Large to 2XL	4.01 lbs. ± 0.02 lbs. (1820 gm ±10 gm)

DESIGN

- · 5-Point adjustable full body harness with quick connect leg straps and quick connect chest
- Constructed from unique polyester webbing with specialized coating that repels oil, dust, and water
- Equipped with removable shoulder pad
- One dorsal attachment enhanced D-ring Plus™
- UFZ850100 Trauma Relief Straps Included
- Equipped with sub-pelvic strap

WEBBING

Material: Polyester with Specialized Coating | Width: 1.73 in. ± 0.04 in. (44mm ± 1mm) / Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: High-tenacity Polyester

METAL COMPONENT

Material: Alloy Steel; Finish: PCB

CAPACITY RANGE

ANSI: 130 - 310 lbs.


RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2014

Dorsal D-ring Plus™ Fast, easy, and safe installation of dual SRL connector.





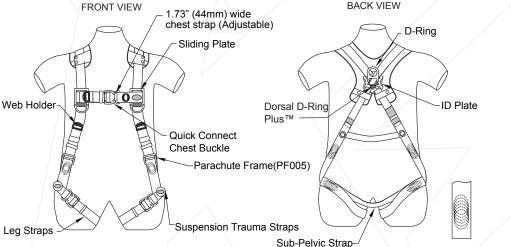

Meets or Exceeds ANSI Z359.11-2014