

KStrong® Kapture™ Element 5-Point Full Body Harness with Revolta™ Oil and Water Repellent Webbing, 1 Enhanced Dorsal D-ring Plus™, 1 Front D-ring, QC Chest, & TB Legs (ANSI)

MODEL	SIZE	WEIGHT
UFH10811GQ(S-M)	Small to Medium	3.64 lbs. ± 0.02 lbs. (1650 gm ± 10 gm)
UFH10811GQ(M-L)	Medium to Large	3.75 lbs. ± 0.02 lbs. (1700 gm ± 10 gm)
UFH10811GQ(L-XL)	Large to X-Large	3.86 lbs. ± 0.02 lbs. (1750 gm ± 10 gm)
UFH10811GQ(XL-2XL)	X-Large to 2XL	3.97 lbs. ± 0.02 lbs. (1800 gm ± 10 gm)

DESIGN

- 5-Point adjustable full body harness with grommeted leg straps and quick connect chest
- Constructed from unique polyester webbing with specialized coating that repels oil, dust, and water
- One dorsal attachment enhanced D-ring Plus™ and one sternal D-ring for fall arrest
- Adjustable shoulder, leg & chest straps
- Equipped with sub-pelvic strap

WEBBING

Material: Polyester with Specialized Coating | Width: 1.73 in. ± 0.04 in. (44mm ± 1mm) | Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: High-tenacity Polyester

METAL COMPONENT

Material: Alloy Steel; Finish: Golden Yellow Galvanized Finish (PB011): PCB

CAPACITY RANGE



ANSI: 130 - 310 lbs.

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2014



Dorsal D-ring Plus™
Fast, easy, and safe
installation of dual
SRL connector.

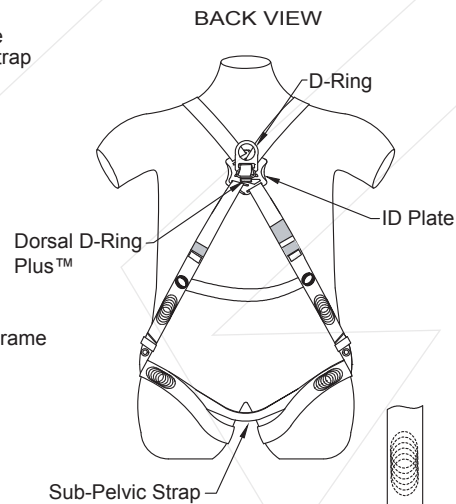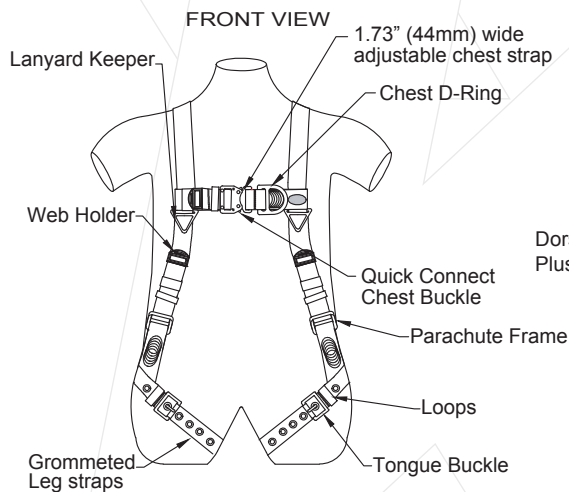

Meets or Exceeds ANSI Z359.11-2014

STITCHING DESIGN