

KStrong® Kapture™ Elite+ 5-Point FBH, Enhanced Dorsal D-ring Plus™, Front D-ring, TB Legs, QC Chest, Back/ Shoulder Pad, All Black Fittings - (ANSI)

5-Point FBH, Back/Shoulder Pad, Enhanced Dorsal D-ring,
Front D-ring, QC Chest, All Black Fittings, TB Legs

DESIGN

- One dorsal & one sternal attachment D-ring for fall arrest.
- Adjustable shoulder, leg & chest straps
- Equipped with back/shoulder pad
- Grometed leg straps

WEBBING

Material: Polyester
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)
Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: High-tenacity Polyester

METAL COMPONENT

Material: Alloy Steel.
Finish: PCB


RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2014

MODEL	SIZE	WEIGHT
UFH152011GQ(S-M)	Small to Medium	4.10 lbs. ± 0.02 lbs. (1863 gm ± 10 gm)
UFH152011GQ(M-L)	Medium to Large	4.21 lbs. ± 0.02 lbs. (1913 gm ± 10 gm)
UFH152011GQ(L-XL)	Large to X-Large	4.32 lbs. ± 0.02 lbs. (1963 gm ± 10 gm)
UFH152011GQ(XL-2XL)	X-Large to 2X-Large	4.43 lbs. ± 0.02 lbs. (2013 gm ± 10 gm)



Dorsal D-ring Plus™
Fast, easy, and safe
installation of dual
SRL connector.

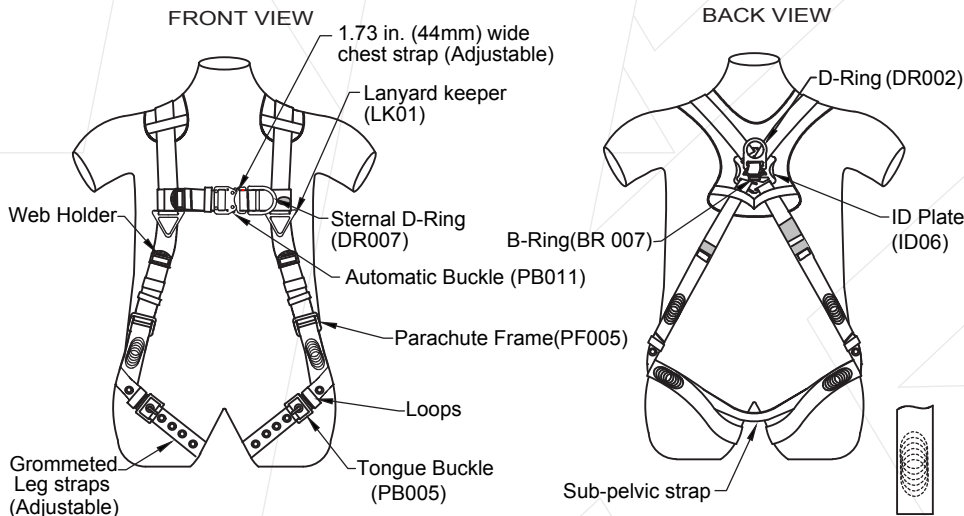

STITCHING DESIGN

Meets or Exceeds ANSI Z359.11-2014