

KStrong® Kapture™ Elite+ 5-Point FBH, Enhanced Dorsal D-ring Plus™, QC Legs, QC Chest, Back/Shoulder Pad, All Black Fittings - (ANSI)

5-Point FBH, Back/Shoulder Pad, Enhanced Dorsal D-ring, QC Chest, All Black Fittings, QC Legs

MODEL	SIZE	WEIGHT
UFH15201Q(S-M)	Small to Medium	3.68 lbs. ± 0.02 lbs. (1670 gm ±10 gm)
UFH15201Q(M-L)	Medium to Large	3.79 lbs. ± 0.02 lbs. (1720 gm ±10 gm)
UFH15201Q(L-XL)	Large to X-Large	3.90 lbs. ± 0.02 lbs. (1770 gm ±10 gm)
UFH15201Q(XL-2XL)	X-Large to 2X-Large	4.01 lbs. ± 0.02 lbs. (1820 gm ±10 gm)

DESIGN

- One enhanced dorsal attachment D-ring for fall arrest.
- Adjustable shoulder, leg & chest straps
- Equipped with back/shoulder pad
- Sub-pelvic Strap

WEBBING

Material: Polyester
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)
Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: High-tenacity Polyester

METAL COMPONENT


Material: Alloy Steel.
Finish: PCB

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2014



Dorsal D-ring Plus™
Fast, easy, and safe installation of dual SRL connector.

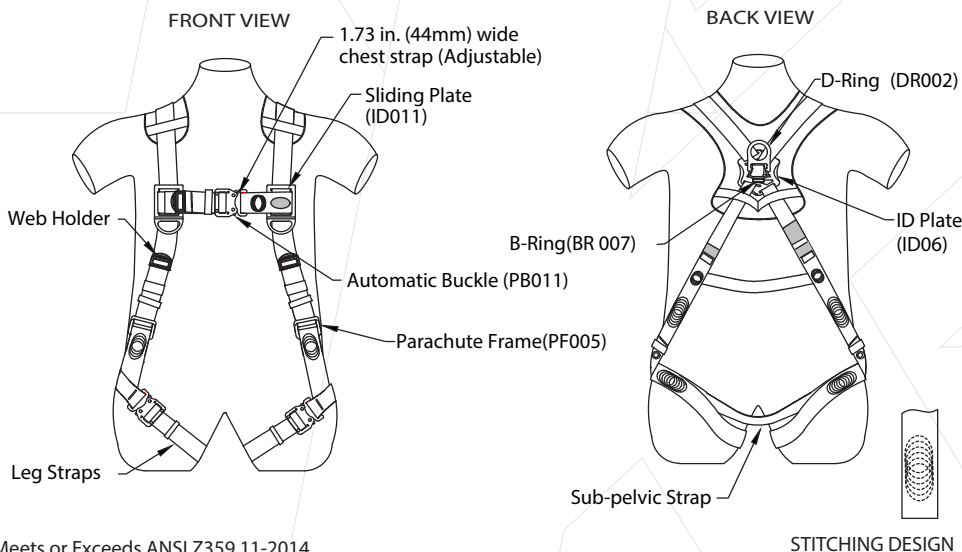

Meets or Exceeds ANSI Z359.11-2014