KAPTURE ELITE
LV2 || FULL BODY HARNESS

Model: UFH15203GQ

KStrong® Kapture™ Elite+ 5-Point FBH, Enhanced Aluminum Dorsal D-Ring Plus™, TB Legs, QC Chest, Removable Padded Shoulder, Spring Torso Adjusters, Multi-Flex Feature for Ease of Mobility (ANSI)

KStrong® Kapture™ Elite+ 5-Point Adjust Full Body Harness with Removable Shoulder Pad, Tongue Buckle Legs, One (1) Enhanced Back D-Ring, Quick Connect Chest, Spring Torso Adjusters, and Multi-Flex Feature for Ease of Mobility (ANSI)

MODEL	SIZE	WEIGHT
UFH15203GQ(S-M)	Small to Medium	4.23 lbs. ± 0.02 lbs. (1920 gm ±10 gm)
UFH15203GQ(M-L)	Medium to Large	4.37 lbs. ± 0.02 lbs. (1980 gm ±10 gm)
UFH15203GQ(L-XL)	Large to X-Large	4.45 lbs. ± 0.02 lbs. (2020 gm ±10 gm)
UFH15203GQ(XL-2XL)	X-Large to 2XL	4.54 lbs. ± 0.02 lbs. (2060 gm ±10 gm)

DESIGN

- One dorsal attachment enhanced D-ring for fall arrest
- Adjustable Shoulder, Leg, and Chest straps
- Grommeted leg straps & Quick Connect Chest
- Equipped with removable shoulder pad

WEBBING

Material: Polyester
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)
Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: High-tenacity polyester

METAL COMPONENT

Material: Alloy Steel; Finish: PCB

CAPACITY RANGE

ANSI: 130 - 310 lbs.; OSHA: 420 lbs.

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2014

FRONT VIEW

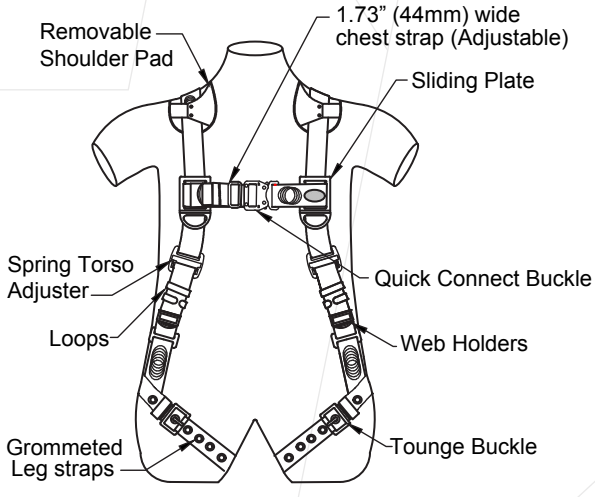

BACK VIEW

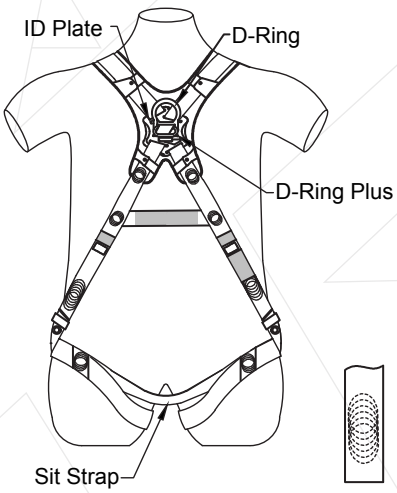

STITCHING DESIGN

Meets or Exceeds ANSI Z359.11-2014