

### KStrong® Kapture™ Elite+ 5-Point FBH, Enhanced Dorsal D-ring Plus™, 2 Side D-rings, QC Legs, QC Chest, Back/ Shoulder Pad, All Black Fittings - (ANSI)

5-Point FBH, Back/Shoulder Pad, Enhanced 3 D-rings, QC Chest, All Black Fittings, QC Legs

#### DESIGN

- One enhanced dorsal attachment D-ring for fall arrest
- Adjustable shoulder, leg & chest straps
- Equipped with shoulder pad
- Two lateral D-Rings for work positioning

#### WEBBING

Material: Polyester  
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)  
Breaking Strength: 5000 lbs.

#### STITCHING THREAD

Material: High-tenacity Polyester

#### METAL COMPONENT

Material: Alloy Steel.  
Finish : PCB


#### RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2014

MODEL	SIZE	WEIGHT
UFH15231Q(S-M)	Small to Medium	4.34 lbs. ± 0.02 lbs. (1970 gm ±10 gm)
UFH15231Q(M-L)	Medium to Large	4.45 lbs. ± 0.02 lbs. (2020 gm ±10 gm)
UFH15231Q(L-XL)	Large to X-Large	4.56 lbs. ± 0.02 lbs. (2070 gm ±10 gm)
UFH15231Q(XL-2XL)	X-Large to 2X-Large	4.67 lbs. ± 0.02 lbs. (2120 gm ±10 gm)



**Dorsal D-ring Plus™**  
Fast, easy, and safe installation of dual SRL connector.

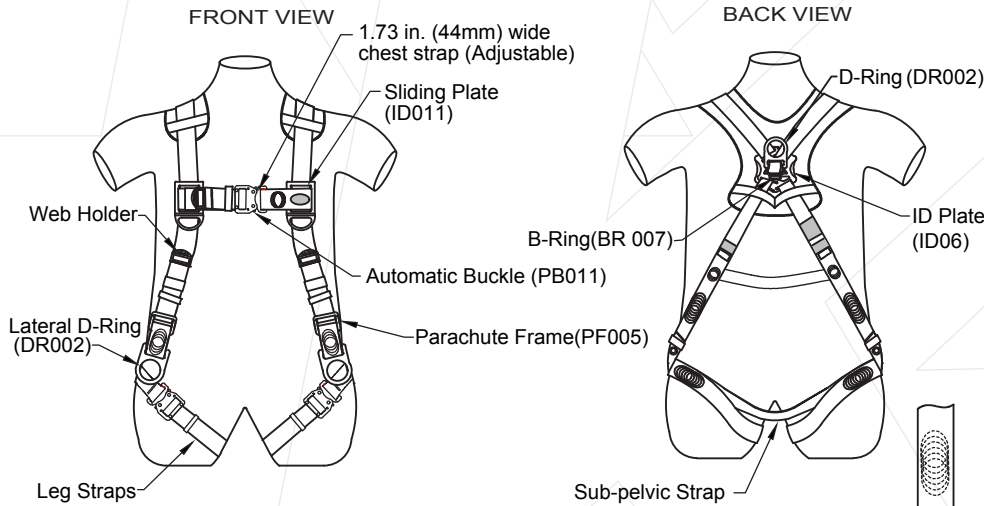

STITCHING DESIGN

Meets or Exceeds ANSI Z359.11-2014