

KStrong® Kapture™ Element Welding Harness, Dorsal D-Ring, QC Chest, TB Legs

Welding Harness, Dorsal D-Ring, QC Chest, TB Legs

DESIGN

- 1.73" (44mm) wide Flame Retardant (FR) webbing
- Adjustable chest strap with Quick Connect Buckle
- Equipped with Dorsal D-ring attachment for Fall arrest
- Grommeted leg straps provides 9 positions of adjustment

WEBBING

Material: Aramid
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)
Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: Kevlar



METAL COMPONENT

Material: Alloy Steel;
Finish: Silver or Golden Yellow Galvanized

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2021

MODEL	SIZE	WEIGHT
UFH19902GQF(S-M)	Small to Medium	3.61 lbs. ± 0.02 lbs. (1640gm ± 10gm)
UFH19902GQF(M-L)	Medium to Large	3.72 lbs. ± 0.02 lbs. (1690gm ± 10gm)
UFH19902GQF(L-XL)	Large to X-Large	3.83 lbs. ± 0.02 lbs. (1740gm ± 10gm)
UFH19902GQF(XL-2XL)	X-Large to 2XL	3.94 lbs. ± 0.02 lbs. (1790gm ± 10gm)

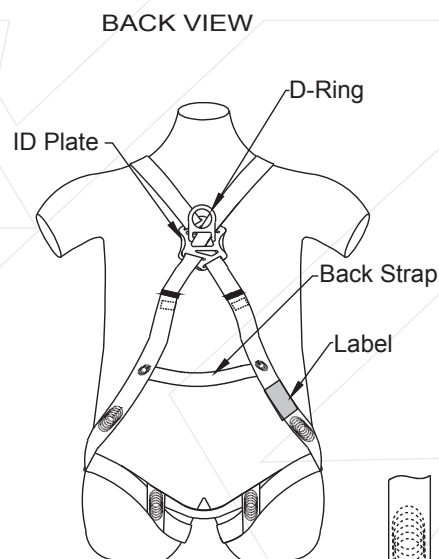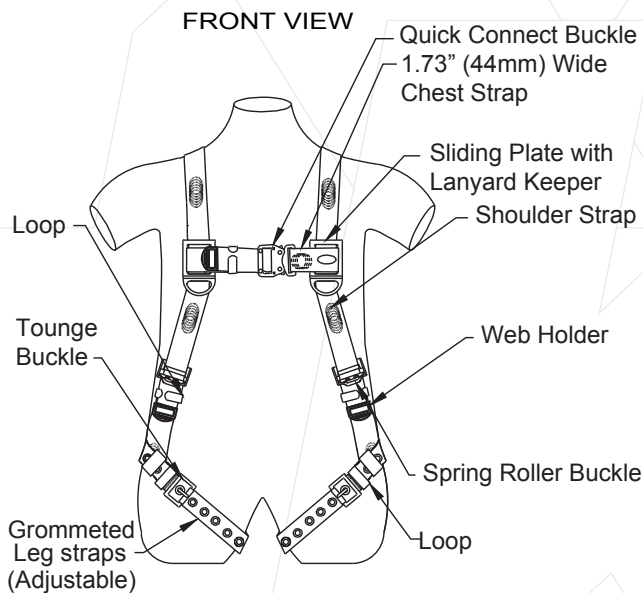

STITCHING DESIGN

Batch #: _____ Serial #: _____
Date of First Use: _____