

KStrong® Kapture™ Element Welding Harness, Dorsal D-Ring, QC Chest and Legs

Welding Harness, Dorsal D-Ring, QC Chest and Legs

DESIGN

- 1.73" (44mm) wide Flame Retardant (FR) webbing
- Equipped with Dorsal D-ring attachment for Fall arrest
- Equipped with Parachute frame at chest straps
- Equipped with Quick Connect Buckle Leg Straps and Adjustable Chest Strap

WEBBING

Material: Flame Retardant (FR) Treated Yarn
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)
Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: Kevlar



METAL COMPONENT

Material: Alloy Steel;
Finish: Silver or Golden Yellow Galvanized

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2021

MODEL	SIZE	WEIGHT
UFH19902QFR(S-M)	Small to Medium	3.63 lbs. ± 0.02 lbs. (1650gm ± 10gm)
UFH19902QFR(M-L)	Medium to Large	3.74 lbs. ± 0.02 lbs. (1700gm ± 10gm)
UFH19902QFR(L-XL)	Large to X-Large	3.85 lbs. ± 0.02 lbs. (1750gm ± 10gm)
UFH19902QFR(XL-2XL)	X-Large to 2XL	3.96 lbs. ± 0.02 lbs. (1800gm ± 10gm)

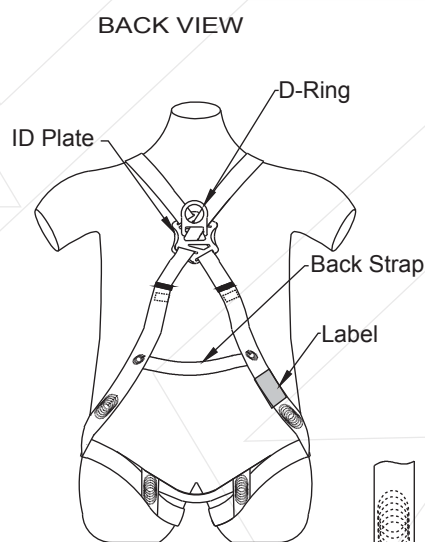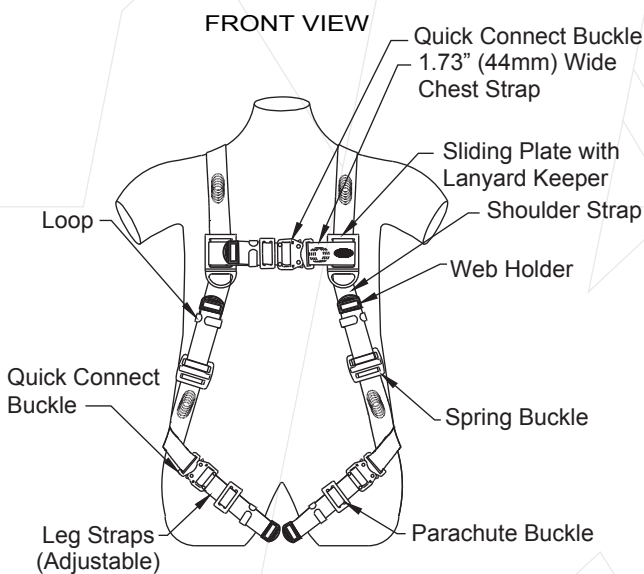

STITCHING DESIGN

Batch #: _____ Serial #: _____
Date of First Use: _____