

KStrong® Kapture™ Element Welding Harness, 3 D-Rings, MB Chest and QC Legs

Welding Harness, 3 D-Rings, MB Chest and QC Legs.

DESIGN

- 1.73" (44mm) wide Flame Retardant (FR) webbing
- Equipped with Dorsal D-ring attachment for Fall arrest and Side D-Rings for Positioning
- Equipped with Parachute frame at chest straps
- Equipped with Adjustable Chest strap
- Equipped with Quick Connect Buckle leg straps

WEBBING

Material: Aramid
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)
Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: Kevlar



METAL COMPONENT

Material: Alloy Steel;
Finish: Silver or Golden Yellow Galvanized

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2021

MODEL	SIZE	WEIGHT
UFH19903PQF(S-M)	Small to Medium	4.29 lbs. ± 0.02 lbs. (1950gm ± 10gm)
UFH19903PQF(M-L)	Medium to Large	4.40 lbs. ± 0.02 lbs. (2000gm ± 10gm)
UFH19903PQF(L-XL)	Large to X-Large	4.51 lbs. ± 0.02 lbs. (2050gm ± 10gm)
UFH19903PQF(XL-2XL)	X-Large to 2XL	4.62 lbs. ± 0.02 lbs. (2100gm ± 10gm)

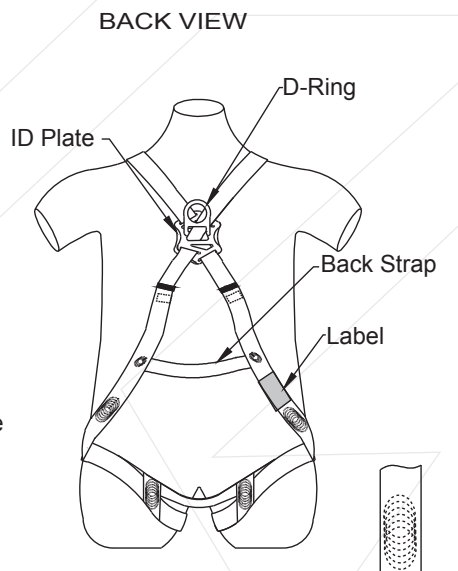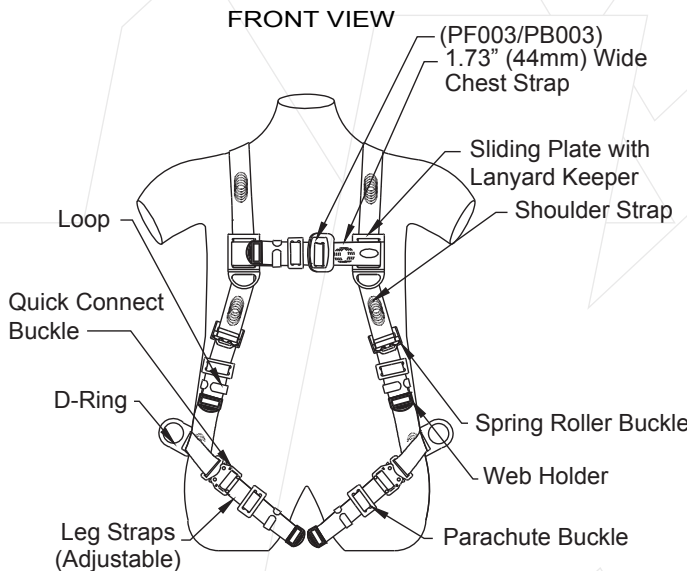

STITCHING DESIGN

Batch #: _____ Serial #: _____
Date of First Use: _____