

KStrong® Kapture™ Element Welding Harness, 3 D-Rings, MB Chest and QC Legs

Welding Harness, 3 D-Rings, MB Chest and QC Legs.

DESIGN

- 1.73" (44mm) wide Flame Retardant (FR) webbing
- Equipped with Dorsal D-ring attachment for Fall arrest and Side D-Rings for Positioning
- Equipped with Parachute frame at chest straps
- Equipped with Adjustable Chest strap
- Equipped with Quick Connect Buckle leg straps

WEBBING

Material: Flame Retardant (FR) Treated Yarn
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)
Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: Kevlar

METAL COMPONENT

Material: Alloy Steel;
Finish: Silver or Golden Yellow Galvanized


RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2021


| MODEL | SIZE | WEIGHT |
|----------------------|------------------|--|
| UFH19903PQFR(S-M) | Small to Medium | 4.29 lbs. ± 0.02 lbs. (1950gm ± 10gm) |
| UFH19903PQFR(M-L) | Medium to Large | 4.40 lbs. ± 0.02 lbs. (2000gm ± 10gm) |
| UFH19903PQFR(L-XL) | Large to X-Large | 4.51 lbs. ± 0.02 lbs. (2050gm ± 10gm) |
| UFH19903PQFR(XL-2XL) | X-Large to 2XL | 4.62 lbs. ± 0.02 lbs. (2100gm ± 10gm) |



FRONT VIEW

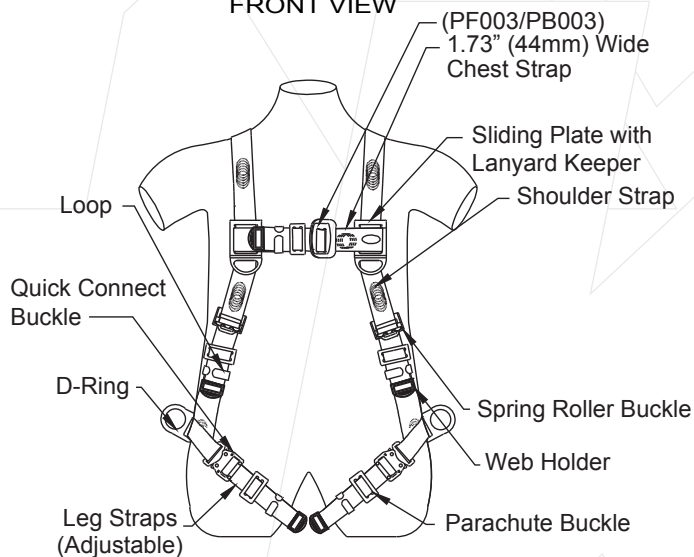

BACK VIEW

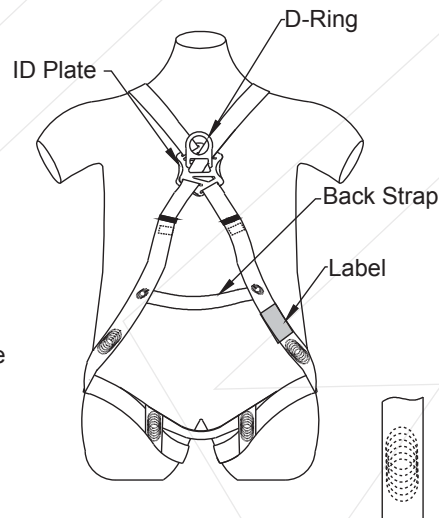

STITCHING DESIGN

Batch #: _____ Serial #: _____
Date of First Use: _____