

KStrong® Kapture™ Element Oil and Gas Derrick Non-Belted Harness with 4 D-rings

Oil and Gas Derrick Non-Belted Harness with 4 D-rings

DESIGN

- Grommeted leg straps provides 9 positions of adjustment
- One dorsal attachment D-ring for fall arrest with Dorsal D-ring Extension
- Features paired hip lifting D-rings and Lower torso mating buckles for belly belt attachment
- Utilizes removable belly belt for monkey board applications

WEBBING

Material: Polyester
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)
Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: High-tenacity polyester



METAL COMPONENT

Material: Alloy Steel;
Finish: Silver or Golden Yellow Galvanized

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2021

MODEL	SIZE	WEIGHT
UFH90141G(S-M)	Small to Medium	4.78 lbs. ± 0.02 lbs. (2170gm ± 10gm)
UFH90141G(M-L)	Medium to Large	4.89 lbs. ± 0.02 lbs. (2220gm ± 10gm)
UFH90141G(L-XL)	Large to X-Large	5 lbs. ± 0.02 lbs. (2270gm ± 10gm)
UFH90141G(XL-2XL)	X-Large to 2XL	5.11 lbs. ± 0.02 lbs. (2320gm ± 10gm)

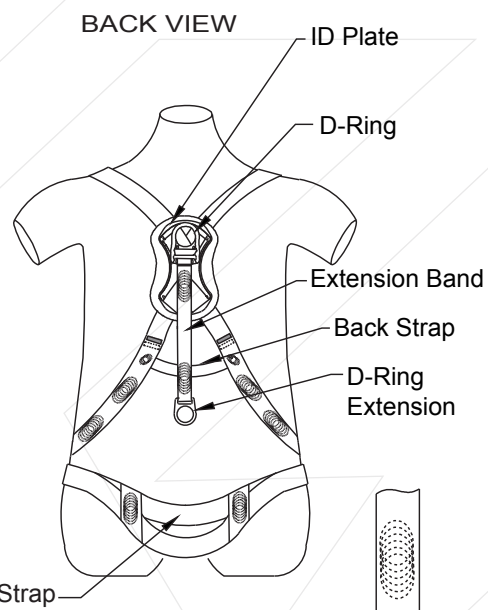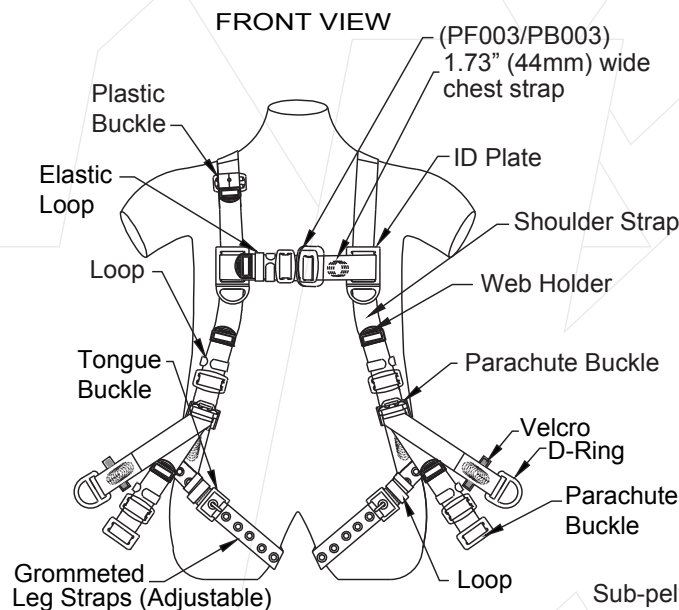

STITCHING DESIGN

Batch #: _____ Serial #: _____
Date of First Use: _____